

Features

2:1/4:1 Wide Input Range

Operating Temperature Range: -45~105°C

Approved to CE, RoHS & REACH

Safety Standards to IEC/EN 62368-1/EN 50155

Efficiency up to 92%

EMC Class A & B

Single output 9~425V DC



28SQBxy-x-x-F150-IP Series

DC/DC PCB Mount Power Supply



Ideal Power's 28SQBxy-x-x-F150-IP 150W Quarter Brick DC/DC Converters Series are certified to UKCA, CE, RoHS, REACH & EN 62368-1/IEC 62368-1/EN 50155 Standards and comply with Efficiency Regulations. These are primarily used in ITE, Audio & Video, Railway Industries, and customised solutions are available upon request.

Part Number Structure


28SQB	-	110	120	-	S	-	P	-	B	150
Series Name		Input Voltage (VDC)	Output Voltage (VDC)		Pin out		Remote control option		Shape	Watt
Supreme series		018 : 9-36	050 : 5		S : Dosa		P : Positive logic		B : Base Plate	150
Quarter		024 : 18-36	120 : 12		V : Vicor		N : Negative logic		F : No Flange	
Brick		036 : 18-75	240 : 24							
		110 : 40-180	280 : 28							
		300 : 180-425	480 : 48							

Models

Model	Input		Current (A) Full load	Output			Efficiency Typ.(%)
	Voltage (V) Range	Nominal		Voltage (V)	Current (A)	Power (W)	
28SQB018050-□-□-□120-IP	9-36	18	9.80	5	24	120	85
28SQB018120-□-□-□150-IP	9-36	18	9.58	12	12.5	150	87
28SQB018240-□-□-□150-IP	9-36	18	9.69	24	6.25	150	86
28SQB018280-□-□-□150-IP	9-36	18	9.80	28	5.36	150	85
28SQB018480-□-□-□150-IP	9-36	18	9.92	48	3.16	150	84
28SQB024050-□-□-□120-IP	18-36	24	7.02	5	24	120	89
28SQB024120-□-□-□150-IP	18-36	24	6.94	12	12.5	150	90
28SQB024240-□-□-□150-IP	18-36	24	6.87	24	6.25	150	91
28SQB024280-□-□-□150-IP	18-36	24	6.79	28	5.36	150	92
28SQB024480-□-□-□150-IP	18-36	24	6.87	48	3.16	150	91
28SQB036050-□-□-□120-IP	18-75	36	4.68	5	24	120	89
28SQB036120-□-□-□150-IP	18-75	36	4.68	12	12.5	150	89
28SQB036240-□-□-□150-IP	18-75	36	4.68	24	6.25	150	89
28SQB036280-□-□-□150-IP	18-75	36	4.68	28	5.36	150	89
28SQB036480-□-□-□150-IP	18-75	36	4.68	48	3.16	150	89
28SQB110050-□-□-□120-IP	40-180	110	1.53	5	24	120	89
28SQB110120-□-□-□150-IP	40-180	110	1.53	12	12.5	150	89
28SQB110240-□-□-□150-IP	40-180	110	1.53	24	6.25	150	89
28SQB110280-□-□-□150-IP	40-180	110	1.53	28	5.36	150	89
28SQB110480-□-□-□150-IP	40-180	110	1.53	48	3.16	150	89
28SQB300050-□-□-□120-IP	180-425	300	0.59	5	24	120	85
28SQB300120-□-□-□150-IP	180-425	300	0.57	12	12.5	150	87
28SQB300240-□-□-□150-IP	180-425	300	0.57	24	6.25	150	88
28SQB300280-□-□-□150-IP	180-425	300	0.57	28	5.36	150	88
28SQB300480-□-□-□150-IP	180-425	300	0.57	48	3.16	150	88

Description

Ideal Power Supreme series - Quarter Brick converter is composed of Isolated, board-mountable, fixed switching frequency DC-DC converters that use synchronous rectification to achieve extremely high-power conversion efficiency. These DC-DC converter modules use advanced power processing, control, and packaging technologies to enhance the performance, flexibility, reliability, and cost effectiveness of mature power components. Each module is six-sided metal case enclosed to provide protection from the harsh environments seen in many industrial and transportation applications

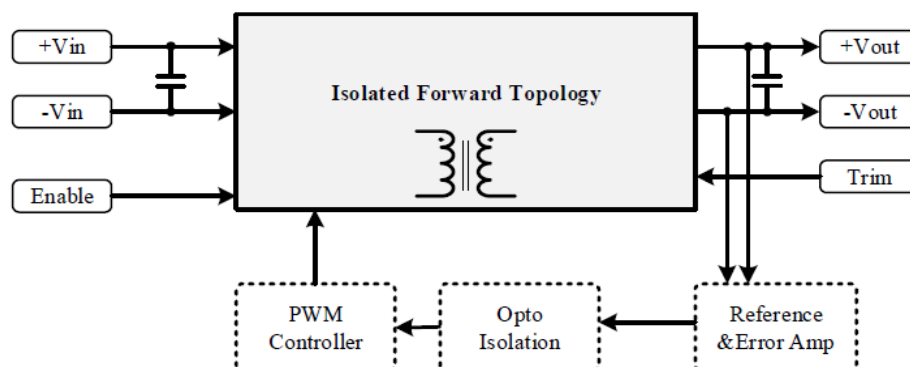

Input Data					
Parameter	Notes and Conditions		Min.	Typ.	Max. Unit
Transient Input Voltage Ranges	28SHB018 models (100ms Max)				50
	28SHB024 models (100ms Max)				50
	28SHB036 models (100ms Max)		--	--	100
	28SHB110 models (100ms Max)				250
	28SHB300 models (100ms Max)				500
Operating Input Voltage Ranges	28SHB018 models		9	18	36
	28SHB024 models		18	24	36
	28SHB036 models		18	36	75
	28SHB110 models		40	110	180
	28SHB300 models		180	300	425
Over-Voltage Lockout Turn OFF Threshold	28SHB018 models				50
	28SHB024 models				50
	28SHB036 models		--	--	80
	28SHB110 models				190
	28SHB300 models				450
Over-Voltage Lockout Turn ON Threshold	28SHB018 models		36		
	28SHB024 models		36		
	28SHB036 models		75	--	--
	28SHB110 models		180		
	28SHB300 models		425		
Under-Voltage Lockout Start-up Voltage	28SHB018 models				9
	28SHB024 models				18
	28SHB036 models		--	--	18
	28SHB110 models				40
	28SHB300 models				180
Under-Voltage Lockout Shutdown Voltage	28SHB018 models			8	
	28SHB024 models			17	
	28SHB036 models		--	17	--
	28SHB110 models			38	
	28SHB300 models			175	
Input Current		See model selection guide, Standby mode (OFF, UVLO) 8mA			
Enable Function Input	Positive logic	ON OFF	Open Short or 0 ~ 1.2		VDC
	Negative logic	ON OFF	Short or 0 ~ 1.2 open		VDC

Output Data

Parameter	Notes and Conditions	Min.	Typ.	Max.	Unit
Output Voltage Accuracy	VNOM 50% Load	--	--	±1.5	%
Line Regulation	Low Line to High Line	--	--	±0.3	%
Load Regulation	10% to 100% Load	--	--	±0.5	%
Ripple & Noise Voltage	Bandwidth 20MHz and with 1μF MLCC Output Capacitor	--	1.5	--	%Vpk-
Temperature Coefficient	--	--	--	+0.04	% / °C
Transient Recovery Time	25% load step change	--	800	--	μSec
Transient Peak Deviation	ΔIo/Δt=2.5A/us	--	+2	--	%Vo
Start-Up Time	When use Enable Function	--	20	--	mSec.
Trimming Output Protection	VNOM 10% Load	--	+10	--	%
Output power protection	VNOM 10% Load	--	120	--	%
Over Voltage Protection	VNOM	--	120	--	%

General Specifications & Environmental Data

Parameter	Notes and Conditions	Min.	Typ.	Max.	Unit
Switching frequency	V _{NOM}	--	250	--	kHz
Storage temperature range	All models	-60	--	125	C
Operating case temperature	All models	-45	--	105	m
Over temperature protection	All models, Auto. Recovery	--	110	--	C
Isolation Voltage	All models, 1 Minute	2250	--	--	VDC
Isolation Resistance	All models,	100	--	--	MΩ
Input to Output	500VDC, At 70%RH				
Isolation Capacitance	All models	--	1500	--	pF
Input to Output					
Humidity (non-condensing)	All models	--	--	95	%
Calculated MTBF	BellCore-TR-332@ 50°C G.B	--	1.2	--	M HR
Thermal shock	Environmental Engineering Experimental Tests	MIL-STD-810F			
Vibration		MIL-STD-810F			
Drop		MIL-STD-810F			
Weight	Shape-B (Base Plate) Shape-F (No Flange Base Plate)	59(2.08) 56(1.97)	G (oz)		
Dimensions	Shape-B (Base Plate) Shape-F (No Flange Base Plate)	2.42" x 1.47" x 0.5" (61.36 x 37.3 x 12.7mm) 2.42" x 1.08" x 0.5" (61.36 x 27.4 x 12.7mm)			
Case Material	Metal				
Potting material	Silicone				

Standards Compliance

Parameter	Standard	Test conditions	Performance criteria
Environmental Compliance	Reach; RoHS	--	Pass
EMI	EN55022	--	Class A / Class B
ESD	EN61000-4-2	±4 kV Air Discharge ±4 kV Contact Discharge	Crit. A
Radiated Immunity	EN61000-4-3	Level 2, 3 V/m	Crit. A
Fast Transient	EN61000-4-4	±2 kV Applied	Crit. A
Surge	EN61000-4-5	±2 kV Applied	Crit. A
Conducted Immunity	EN61000-4-6	Level 2, 3 V rms	Crit. A


It is recommended to protect the input by fuses or other protection devices.

Modules could meet EN55032 Class A and Class B standard with external components.


The information and specifications contained in this data sheet are believed to be correct at time of publication. All specifications are subject to change without notice. No rights under any patent accompany the sale of any such products or information contained herein.

Conducted EMI


Shape – B (Base Plate with DOSA pinout)

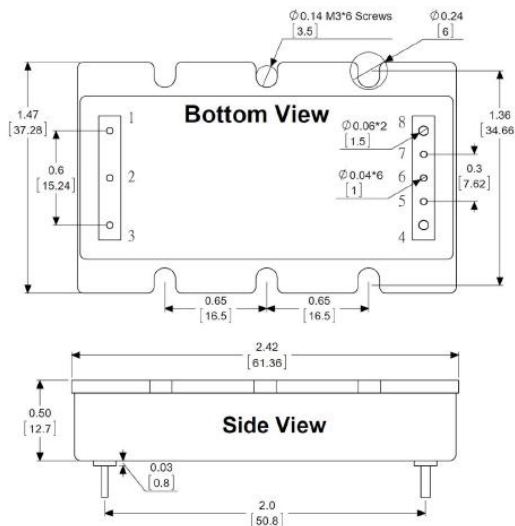


Shape – F (No Flange Base Plate with DOSA pinout)

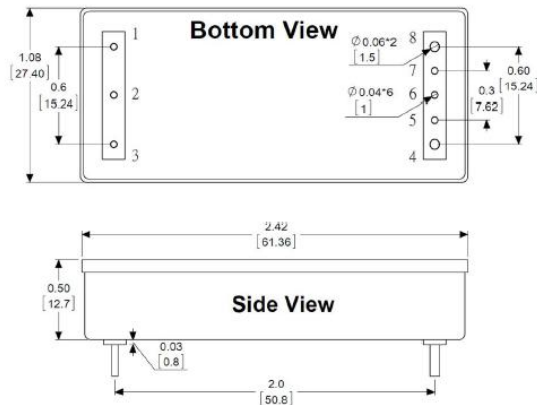

Shape – B (Base Plate with Vicor pinout)

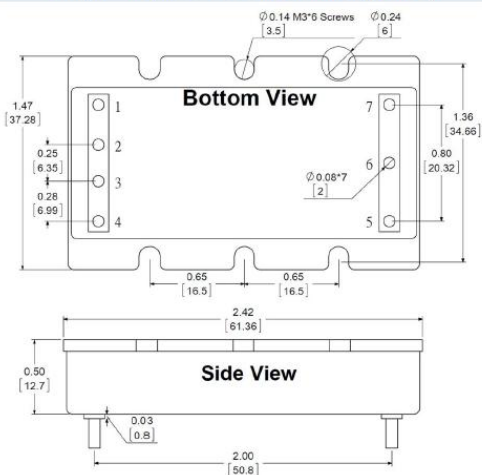

Shape – F (No Flange Base Plate with Vicor pinout)

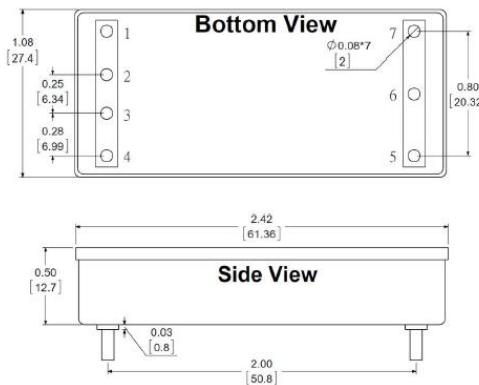

Pin#	Function
1	-Vin
2	NC
3	Enable
4	+Vin
5	+Vout
6	+Sense
7	Trim
8	-Sense
9	-Vout

Note:

Pin Material: Copper Alloy


Pin Plating: Gold

Dimensions in inches [mm]

Tolerances: .XX±0.02 [.X±0.5mm]

Mechanical Drawings & Pin Assignment

Input terminal value (typ.) 28SQB018120-V-P-B150 @Vin = 18VDC, Iout = 12.5A

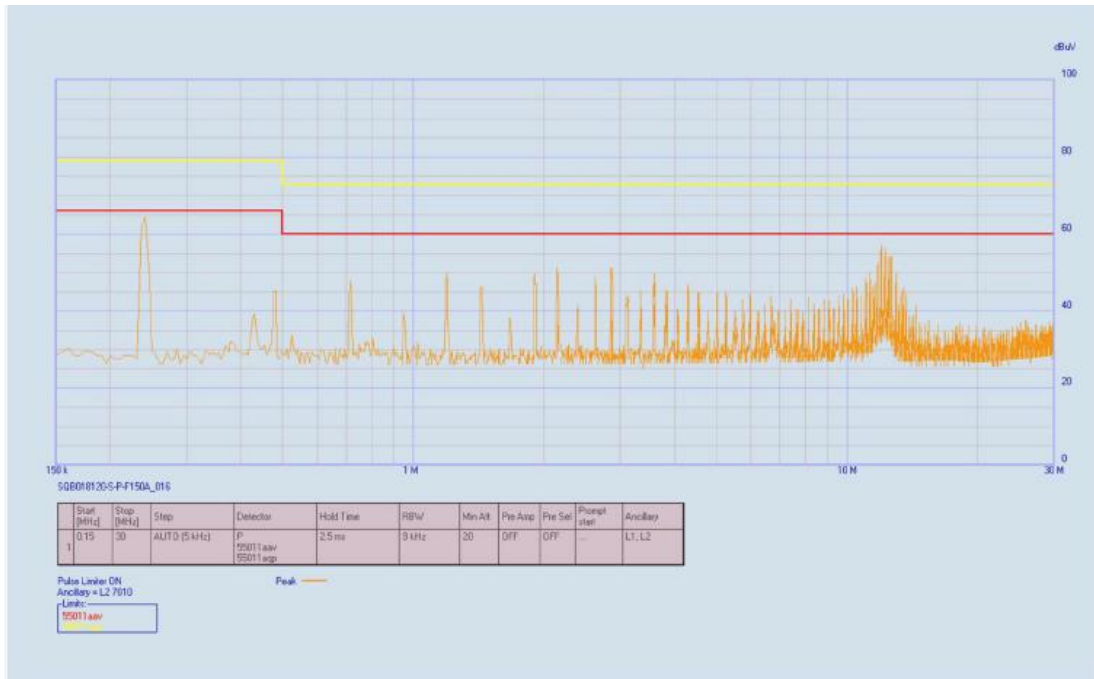

Characteristic curves

Testing conditions are at typical input, $T_a = +25^\circ\text{C}$, full load (horizontal mount) Unless otherwise indicated

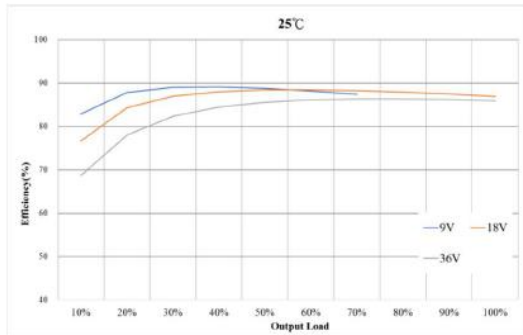


Figure 1 : Efficiency at Minimum, Nominal and Maximum Input Voltages VS. Output Load.

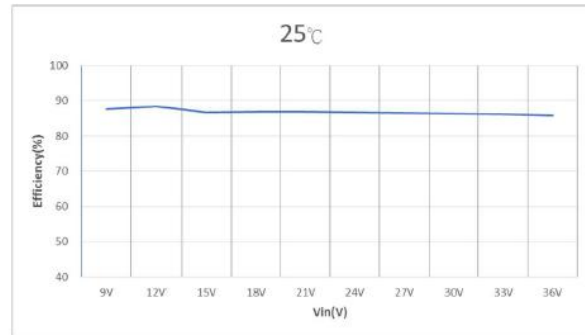


Figure 2 : Efficiency VS. Input Voltages at 100% rated power

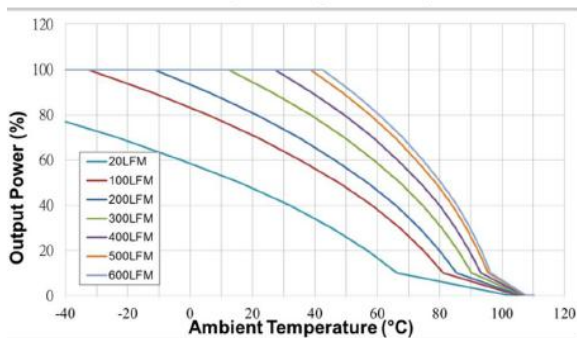


Figure 3 : Ambient Temperature VS. Output Power Derating Curves (Note: 20LFM = Free Air)

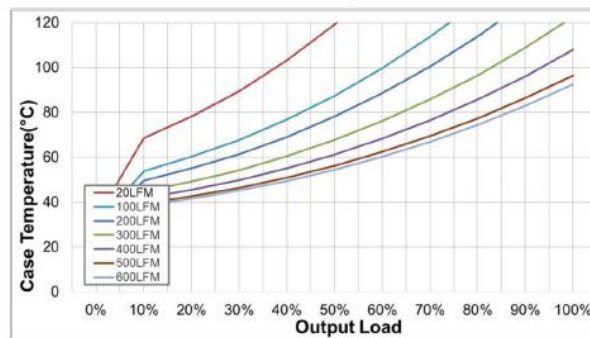


Figure 4 : Case Temperature VS. Output rated Power (Note: 20LFM = Free Air)

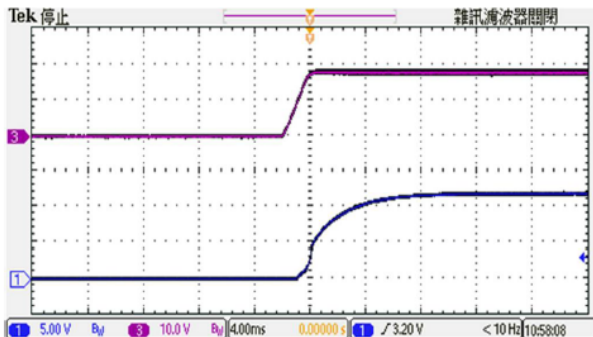


Figure 5 : CH1 = Vout, CH3 = Nominal Input Typical Start-up waveform at Full load.

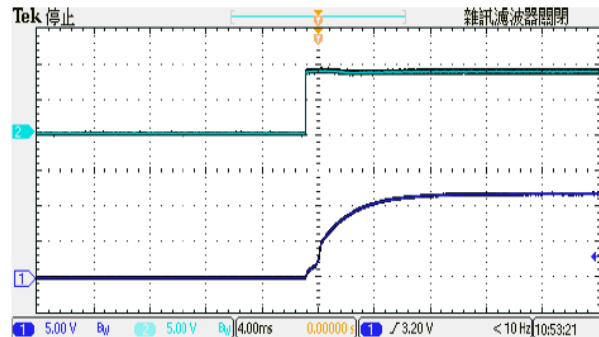


Figure 6 : CH1 = Vout, CH3 = Enable Pin Typical Start-up waveform. Input voltage pre-applied

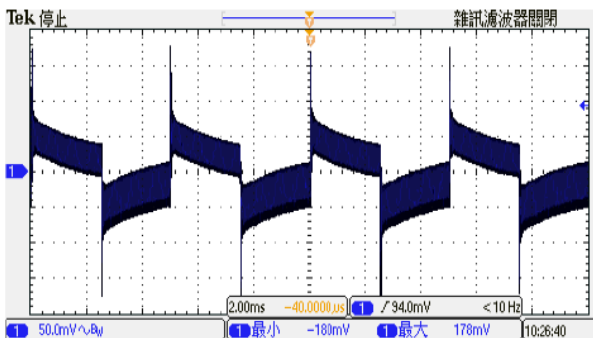


Figure 7 : Transient Response at Output step load (Vin: Typical, 50~75% of output current; $\Delta I_o/\Delta t = 1\text{A}/\mu\text{S}$)

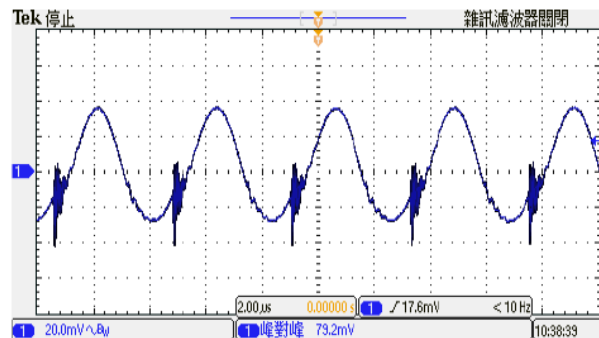


Figure 8 : Output Voltage Ripple & Noise at full load. (Vin: Typical, With Output Capacitor to add 1uF MLCC)

Trimming Output Voltage - For Single Output Models

Only the single output converters have a trim function. That allows users to adjust the output voltage from +10% to -10%, please refer to the trim table that follow for details. Adjustments to the output voltage can be used with a simple fixed resistor as shown in Figures 1 and 2. A single fixed resistor can increase or decrease the output voltage depending on its connection.

Note:

- ※ Trim adjustments higher than the specified range can have an adverse effect on the converter's performance and are not recommended.
- ※ If the trim function is not used, leave the trim pin open.

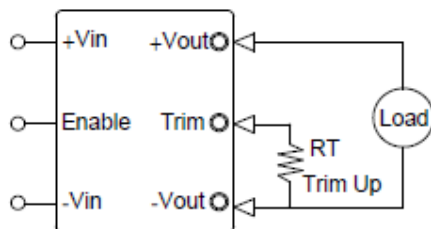


Figure 1. Trim Connections To increase Output Voltages Using Fixed Resistors

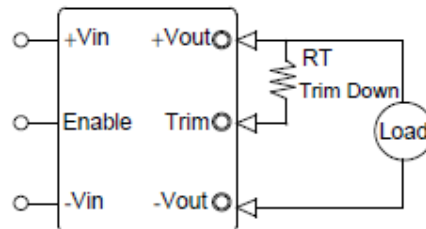


Figure 2. Trim Connections To Decrease Output Voltages Using Fixed Resistors

Trim up resistor value(KΩ)										
Vout	1%	2%	3%	4%	5%	6%	7%	8%	9%	10%
5	109	50	30	20	14	10	7	5	3.3	2
12	258	115	67	44	29	20	13	7.8	3.8	0.6
24	514	232	137	90	62	43	30	20	12	5.5
28	602	271	161	105	72	50	34	22	13	5.9
48	1039	464	273	177	120	81	54	34	18	5

Enable Control Function

The primary-side, Enable Control function can be specified to operate with either positive or negative polarity. Positive-polarity devices are enabled when the enable pin is left open or is pulled high. See "Enable Function Input. Positive-polarity devices are disabled when the enable pin is pulled low (under +1.0V with respect to -input). Negative-polarity devices are off when the enable pin is high/open and on when the enable pin is pulled low. See Figure 3.

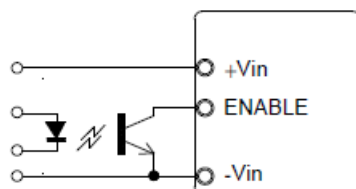


Figure 3. Driving the Enable Control pin

Trim down resistor value(KΩ)										
Vout	-1%	-2%	-3%	-4%	-5%	-6%	-7%	-8%	-9%	-10%
5	137	62	37	25	17	12	9	6	4	2.2
12	358	162	96	63	44	31	21	14	8.9	4.5
24	769	352	213	143	102	74	54	39	28	18
28	860	392	236	158	111	80	57	41	28	17
48	1413	638	380	251	173	121	85	57	35	18

Output Ripple Noise

The two copper strips simulate real-world PCB impedances between the converter and its load. Scope measurements should be made using BNC connectors or the probe ground should be less than 1/2 inch and soldered directly to the fixture. All external capacitors should have appropriate voltage ratings and be located as close to the converter as possible. Temperature variations for all relevant parameters should be taken into consideration. The most effective combination of external I/O capacitors will be a function of line voltage and source impedance, as well as load and layout conditions. See Figure 4

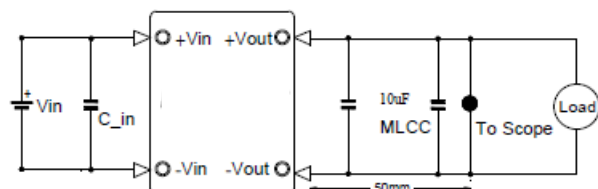


Figure 4. Measuring Output Ripple/Noise(20MHz bandwidth)

Recommended Circuit Diagram for conducted EMI Class A

