

## Features

- Universal input 195~264V AC
- Short Circuit Output Protected
- Approved to UKCA, CE
- LVD & EMC Class B Certified, RoHS & REACH compliant
- 12V Lead Acid 3 Stage Control (Fast/Normal/Float)
- OVP, OCP, OTP Short Circuit
- LED Charge Indicators Included



Ideal Power's 31ACNN12-RS Range of 12V Lead Acid Battery Chargers Series are certified to UKCA, CE, RoHS, REACH & EN 62368-1 Standards and comply with the relevant Efficiency Regulations. These are primarily used in ITE, Audio & Video Industries and customised solutions are available upon request.

Models	31AC2512-RS
Input Voltage	195~264V AC / 230V AC +/-15%
Input Frequency	47Hz ~ 63Hz / 50-60Hz +/- 5%
Output Max Current	25A
Output Power	300W
Output Voltage	14.6~13.7V DC Float charge / absorption charge
Ripple & Noise	115 ~ 350 mVp-p (model dependant)
Isolation	Input isolate Chassis : 500M OHM
Battery Application	Lead Acid Battery
Fan Control	Fan on fast speed: Bulk/Absorption charge Fan on slow speed: Float charge
LED - Power	Red
LED - Charging	Orange
LED – Fully Charged	Green
DC Cable	1.0M Mount clips
Dimensions	240 x 180 x 76 (LxWxH) mm
Weight	3.0 (Kgs)

Specifications subject to change without notice.

### Applications

◎ Communication devices	◎ Power generators	◎ UPS	◎ Power Inverters
◎ Vacuums Pumps	◎ Sailing boats	◎ Fork-lift	◎ Ambulance
◎ Fire trucks	◎ Emergency vehicles	◎ Electrical car & bicycles	◎ Mobile command centres
◎ Household items	◎ Communication Equipment's	◎ Automobiles	

**NOTE:** \*This version is with a Universal Input

**Environmental Data**

	Minimum	Typical	Maximum	Units	Notes
Operating Temperature	0	--	45	°C	
Storage Temperature	0	--	70	°C	
Operating Humidity	20	--	90	°C	
Storage Humidity	10	--	95	°C	

**EMC Emissions (2014/30/EU)**

	Standard	Test Level	Criteria	Notes
Conducted	EN 55032	Pass	B	
Radiated	EN 55032	Pass	B	
Harmonic Current	EN 61000-3-2	Pass	A	
Voltage Flicker	EN61000-3-2	Pass		


**EMC Immunity (2014/30/EU)**

	Standard	Test Level	Criteria	Notes
EMS	EN 55035	Pass	A	
ESD	IEC 61000-4-2	Pass	B	Contact: +/- 4KV; Air: +/- 8KV
RS	IEC 61000-4-3	Pass	A	Frequency: 80-1000MHz; Field Strength: 3V/M ' 80% AM(1KHz)
EFT	IEC 61000-4-4	Pass	B	1.0KV on input AC power ports
Surges	IEC 61000-4-5	Pass	B	Line to Line: +/- 1KV (peak); Line to F.G: +/- 2KV (peak)
Conducted	IEC 61000-4-6	Pass	A	150KHz to 80MHz 3Vms
PFMF	IEC 61000-4-8	Pass	A	50hZ, 60Hz, 1A/m
Dips and Interruptions	IEC 61000-4-11	Pass	Complies	0%, 70%, 0% of UT

**Safety Approvals**


	Safety standard
CE	EMC Directive 2014/30/EU, LVD Directive 2014/35/EU, RoHS Directive RoHS (EU) 2015/863

## Three Steps of Charging & Charge Curve

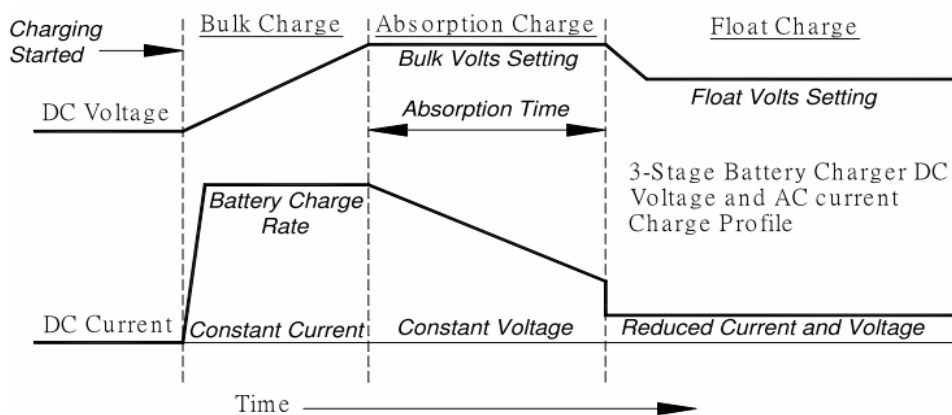


Step 1	Bulk charge – bring batteries to 75% capacity fast. During this stage charging occurs at full power, which means maximum current, until the battery voltage reached the set limit.
Step 2:	Absorption Charge, boost – slow the current flow, adjusting for maximum efficiency and gently topping off batteries. During absorption charging the current decreases as the battery approached full charge.
Step 3	Trickle Charge – for longer period, maintains fully charged batteries without harmful effects of overcharging and cooking. Trickle charge is intended to keep the battery in a fully charged state and compensates for self-discharge. When the current reaches setting point the battery switches to a maintenance charge at a constant voltage. Should the battery be in use and the charge current Subsequently exceed setting point the charger will automatically return to the beginning of the three-step charge characteristic.

### Case Drawing

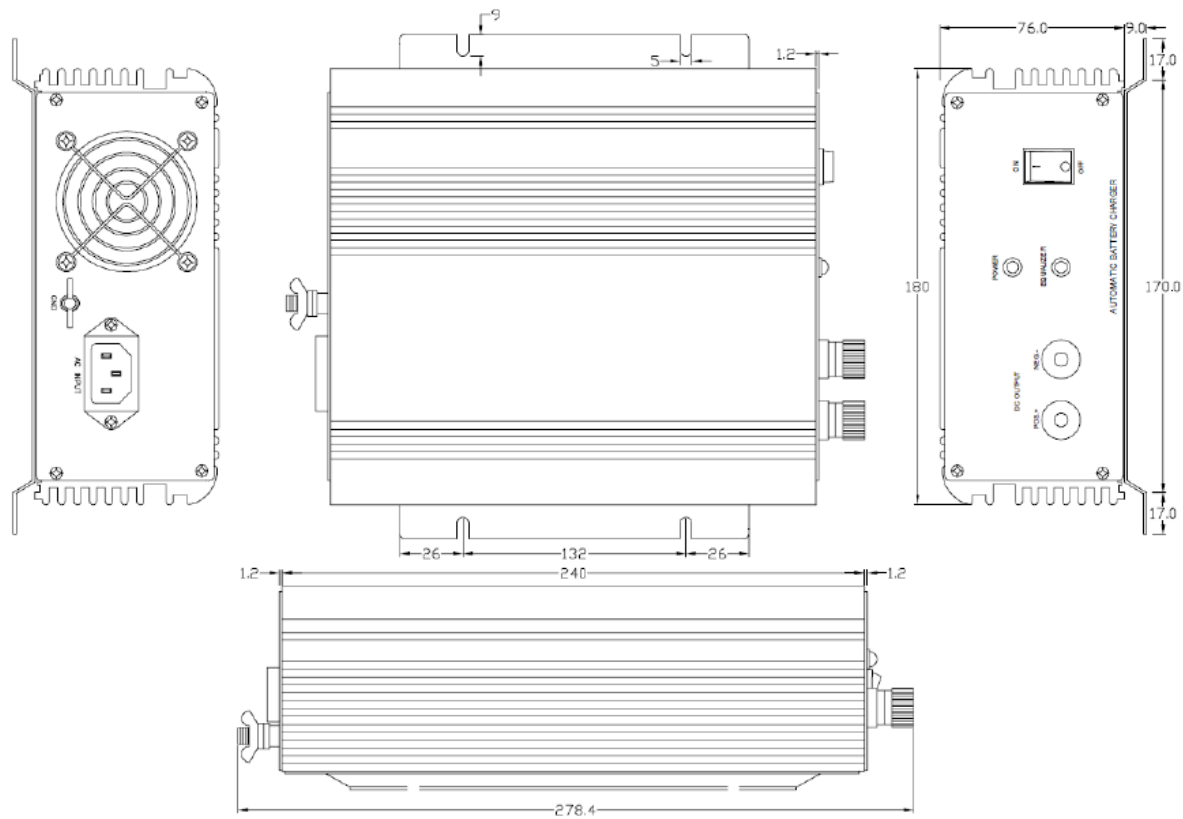

### Cable Drawing

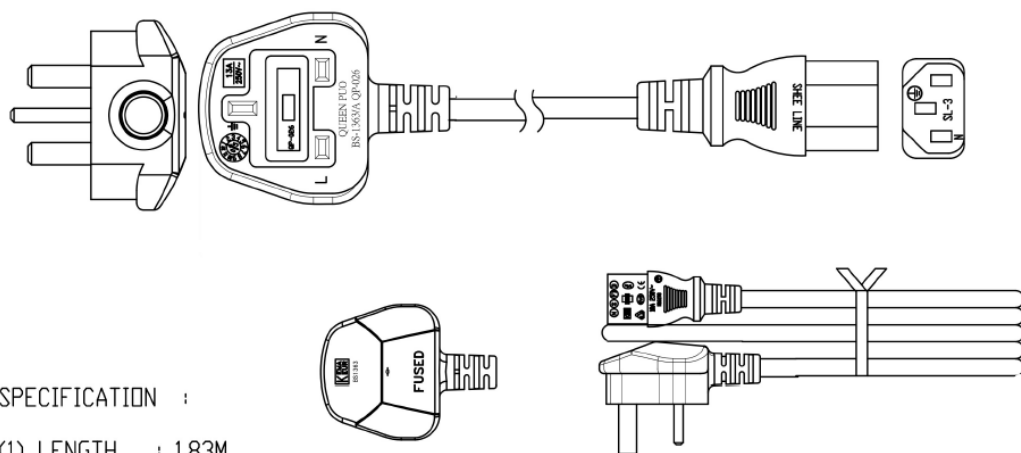

#### SPECIFICATION :

- (1) LENGTH : 1.83M
- (2) COLOR : BLACK
- (3) PLUG : QP-026 (A)13 (V)250 APPROVAL: KEMA BS1363
- (4) CONNECTOR: SL-3 (A)10 (V)250 APPROVAL:EUR
- (5) CABLE : H05VV-F0.75mm<sup>2</sup>/3G APPROVAL:EUR

Ideal Power Limited

14 Larks Way, Tree Beech Enterprise Park, Gunn, Barnstaple, Devon, England, EX32 7NZ.

www.idealpower.co.uk | +44 (0) 845 260 3400