

Features

Compact, High efficiency

Universal Input:
90~132V AC (180~264V DC)
240~730V DC

Operating altitude: up to 5,000m

Operating temp: -30°C to +70°C

Low leakage current:
<2mA @ 240V AC

Approved to UKCA, CE, cURus, CQC,
BIS, RCM (C-Tick), EAC, RoHS &
REACH

OTP, SCP

3 year warranty

10PLS-200-XX

200W Enclosed AC/DC Power Supply



The 10PLS-200-XX flat-panel power supply offers a 30mm ultra-thin profile, universal AC input, and natural convection cooling for efficient thermal performance. It supports operation from -30°C to +70°C and provides high isolation, reliable performance, and a compact lightweight design. Safety and EMC specifications align with international standards including EN IEC 62368-1 and GB 4943.1. Suitable applications include industrial control, energy storage, charging infrastructure, LED systems, security, telecommunications, and smart home equipment.

Models

Model Number	Input Voltage (V)	Output Voltage (V DC)	Output Voltage Range (V DC)	Output Current (A)	Rated Power (W)	Efficiency (%)	Ripple & Noise(max.) (mVp-p)
10PLS-200-12	90~132V AC 180~264V DC 240~730V DC	12	11.4~13.8	17.0	204	87.0	150
10PLS-200-15		15	13.5~18.0	14.0	210	88.0	150
10PLS-200-24		24	21.6~28.8	8.8	211	89.0	150
10PLS-200-36		36	32.4~39.6	5.9	212	89.5	150
10PLS-200-48		48	43.2~52.8	4.4	211	89.0	200
10PLS-200-54		54	48.8~58.5	3.9	210	89.0	200

Input Specifications	
Parameter	Specification
Rated Input Voltage	100~240V AC / 200~240V AC (switch selectable)
Input Voltage Range	90~132V AC / 180~264V AC (switch selectable)
Rated Input Frequency	50~60 Hz
Input Frequency Range	47~63 Hz
Input Current	4.5A typ. @ 115V AC, 2.5A typ. @ 230V AC
Maximum Surge Current	Cold start, 60A / 230V AC
Leakage Current	<2mA @ 240V AC

Output Specifications	
Parameter	Specification
Output Connector	Screw terminal
Line Regulation	≤±0.5%
Load Regulation	≤±0.5%
Rise Time	50ms typ. @ 115V AC & 230V AC
Turn-on Time	1500ms typ. @ 115V AC & 230V AC
Hold-up Time	15ms typ. @ 115V AC & 230V AC
Capacitive Load Startup	12V: ≤8,000μF, 15V: ≤8,000μF, 24V: ≤4,500μF, 36V: ≤3,000μF, 48V: ≤2,000μF, 54V: ≤2,000μF

Environmental Characteristics		
Parameter	Condition	Specification
Ambient Temperature	Operating	-30°C to +70°C (cold start at -40°C)
	Storage	-40°C to +85°C
Power Derating	Temperature	Power derating by 2% per °C above 50°C
	Voltage	Power derating of 2% per volt at 80% load at 90V AC for voltages below 100V AC
Operating	Humidity	20 to 90%RH (no condensation)
	Altitude	0 to 5,000m (0 to 16,400ft)
Impact Test	Non-operational	IEC 60068-2-27, half-sine wave: 50G for 11ms; 3 times in each direction, totalling 9 times
	Operational	IEC 60068-2-27, half-sine wave: 10G for 11ms; X-axis 1 cycle
Vibration Test	Non-operational	IEC 60068-2-6, random: 5Hz~500 Hz (2.09G); 20 minutes in all X, Y & Z
	Operational	IEC 60068-2-6, sine wave: 10Hz~500 Hz @ 19.6 m/s ² (2G peak); 10 minutes 1 cycle, X direction 60 minutes
Overvoltage Category	—	II (compliant with EN 62477-1 OVC III standard for 2000-meter altitude elevation)

Protection	
Parameter	Specification
Overvoltage	12V: <16.2V, 15V: <21V, 24V: <33.6V, 36V: <45V, 48V: <60V, 54V: <63V
Overload / Overcurrent	120~200% rated load current, hiccup mode, non-lockout (automatic recovery)
Over Temperature	Automatic recovery
Short Circuit	Hiccup mode, unlocked (automatically restored after fault resolution)
Electrical Shock	Connect PE*4 to achieve Class I

Reliability Requirements	
Parameter	Specification
MTBF	Telcordia SR-332: >300,000hrs, Input: 115V AC & 230V AC, Output: 100% load, Temperature: 25°C
Warranty	3 years

Regulatory Compliance	
Parameter	Specification
Safety Entry Low Voltage	Safety Entry Low Voltage — SELV
Approvals	UKCA, CE, cURus, CQC, BIS, RCM (C-Tick), EAC, RoHS, REACH
Standards	EN 62368-1, IEC 62368-1, EN 60335-1, IEC 60335-1, EN 61558-1, EN 61558-2-16, IEC 61558-1, IEC 61558-2-16, IEC 60950-1, UL 62368-1, CAN/CSA C22.2 No. 62368-1, GB 4943.1, CNS 15598-1, TP TC 004/2011
Isolation Voltage	Input~Output: 3750V AC
	Input~Ground: 2000V AC
	Output~Ground: 500V AC

EMC	
Parameter	Specification
EMC Standards	FCC Title 47, CISPR 32, EN 55032, BS EN 55032, KS C 9832, AS/NZS CISPR32, EN 55014-1, BS EN 55014-1, EN 55014-2, BS EN 55014-2, EN 55035, BS EN 55035, KN35, EN 61000-6-1, BS EN 61000-6-1, EN 61000-6-2, BS EN 61000-6-2, EN 61000-6-3: Class B, BS 61000-6-3: Class B, EN 61000-6-4, BS EN 61000-6-4
Electrostatic Discharge	IEC 61000-4-2: Level 4 Criteria A1, Air discharge: 15kV: Contact discharge: 8kV
Radiated Immunity	IEC 61000-4-3: Level 3, Criteria A1, 80MHz~1GHz, 10V/m, 1kHz, 80% modulation
EFT/Burst	IEC 61000-4-4: Level 3, Criteria A1, ± 2 kV
Surge Immunity	IEC 61000-4-5: Level 4, Criteria A1, Common mode 4: ± 4 kV, Differential mode 5: ± 2 kV
Conducted Immunity	IEC 61000-4-6: Level 3, Criteria A1, 150kHz~80MHz, 10Vrms
Magnetic Field Immunity	IEC 61000-4-8: Level 4, Criteria A1, 30A/meter
Voltage Dips & Interruptions	IEC 61000-4-11: 0% sudden drop: 1 cycle Criteria B2, 40% sudden drop: 10 cycles Criteria C3, 70% sudden drop: 25 cycles, Criteria C3
Harmonic Current	IEC/EN/BS EN 61000-3-2: Class A


Product Details	
Parameter	Specification
Shell Base	Aluminium
Outer Cover of Housing	SGCC
Size (L x W x H)	215 x 115 x 30mm
Weight	0.63kg
Pilot Lamp	Green LED (DC OK)
Cooling Method	Natural convection
Wire	AWG 18–12 (refer to AWG table on next page)
Noise	Sound Pressure Level (SPL) <45dBA (1 meter from the power supply)

Assembly & Installation

AWG Wire Table

PVC wire AWG rated current			
6 AWG	52.5 A	20 AWG	6.5 A
8 AWG	37.5 A	22 AWG	5.0 A
10 AWG	29.0 A	24 AWG	3.5 A
12 AWG	22.5 A	26 AWG	2.5 A
14 AWG	16.5 A	28 AWG	2.0 A
16 AWG	12.0 A	30 AWG	1.5 A
18 AWG	9.0 A		

Installation Instructions:

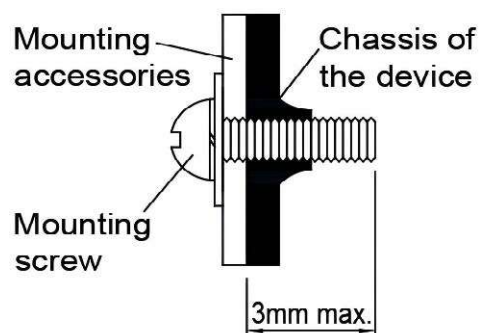


Only M3 screws with a diameter ≤ 3 mm (0.20 inch) are permitted for installation through base drilling to ensure secure fastening of screws to internal components.

Maintain a safe distance


Recommended installation tightening torque:
4~7Kgf.cm (3.47~6.08lbf.in)

1. If you use the power supply in a non-recommended installation direction, please contact Ideal Power for consultation.
2. Ensure adequate convective cooling. When the power supply is in operation, all external components must maintain a safety distance of ≥ 50 mm (1.97 inch) from the power supply ventilation surface.
3. It is not recommended to install power supplies on surfaces with low thermal conductivity coefficients, such as plastics.
4. Note: The power supply enclosure may overheat depending on ambient temperature and power load. Avoid contact during operation or immediately after shutdown to prevent burns!
5. Do not touch the terminal block under power supply conditions to avoid electric shock.
6. During installation, it is imperative to ensure that no external metals, objects, or conductors enter the power supply to prevent electric shocks, safety hazards, fires, or machine operational failures.
7. The power supply must be installed on a grounded metal surface using metal screws. It is strongly recommended to connect the grounding terminals of the power supply terminal block to the earth.

Block Diagram

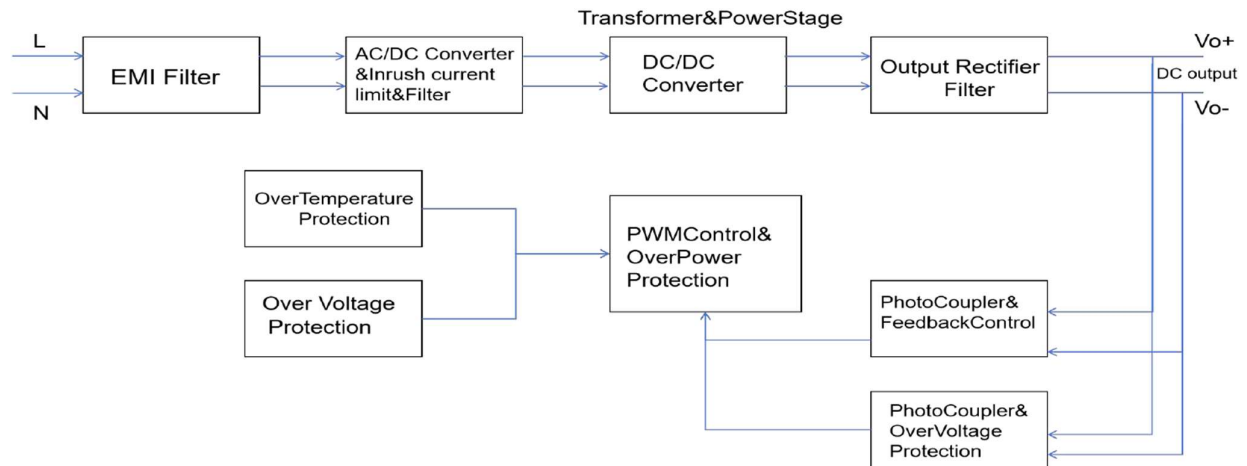

Power Supply Component Description

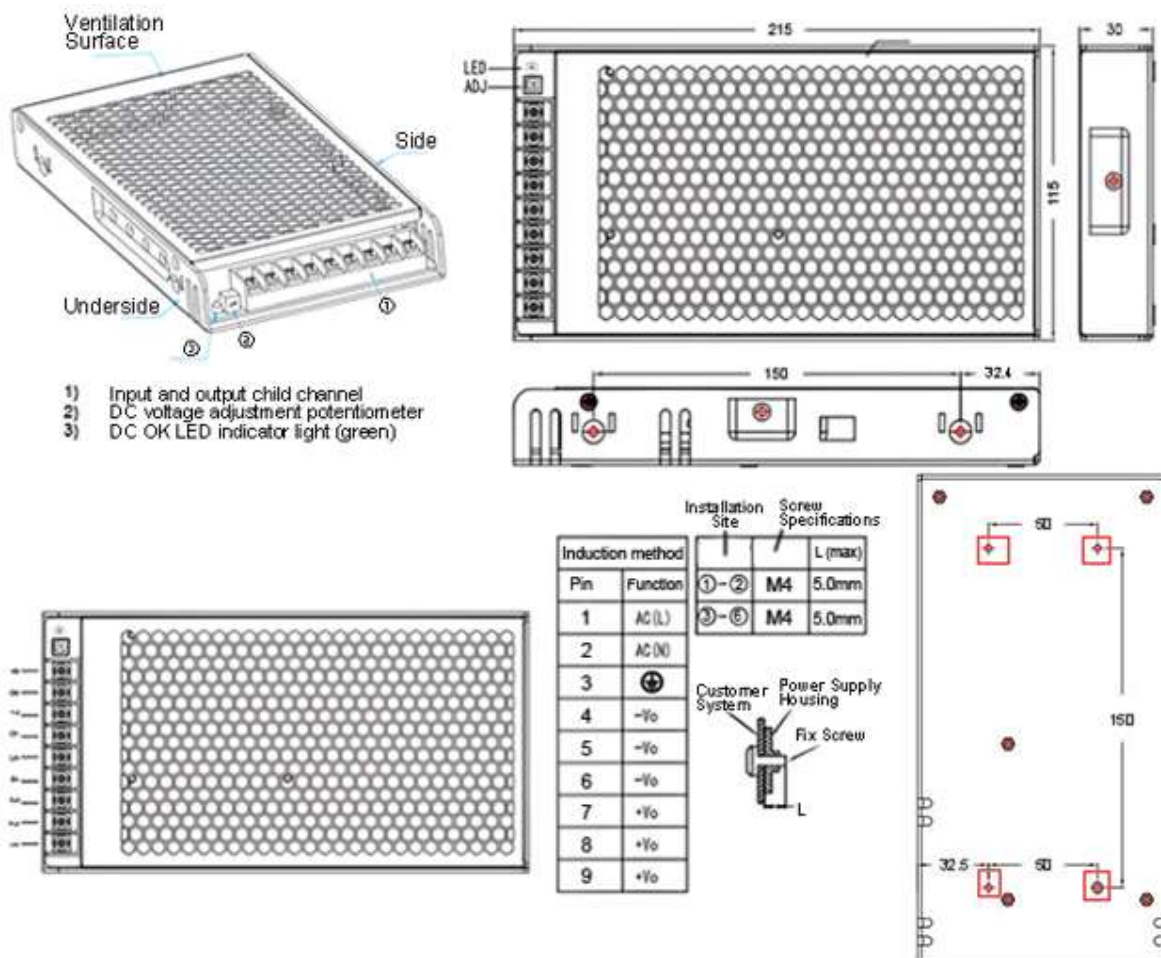

Unless otherwise specified, the dimensional tolerance is ± 0.5 .

+ Mounting holes

Engineering Data

Figure 1) Temperature Derating / Output Load Derating Corresponding to Ambient Temperature


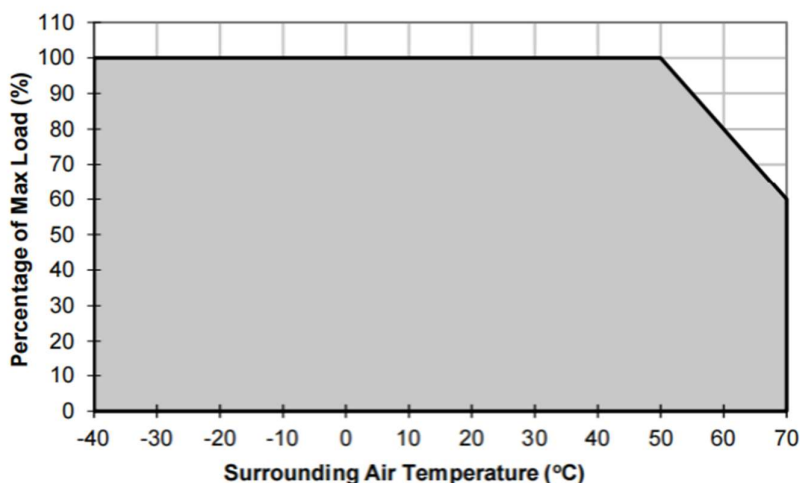



Figure 2) AC Input Voltage Derating / Output Load Derating Versus Input Voltage

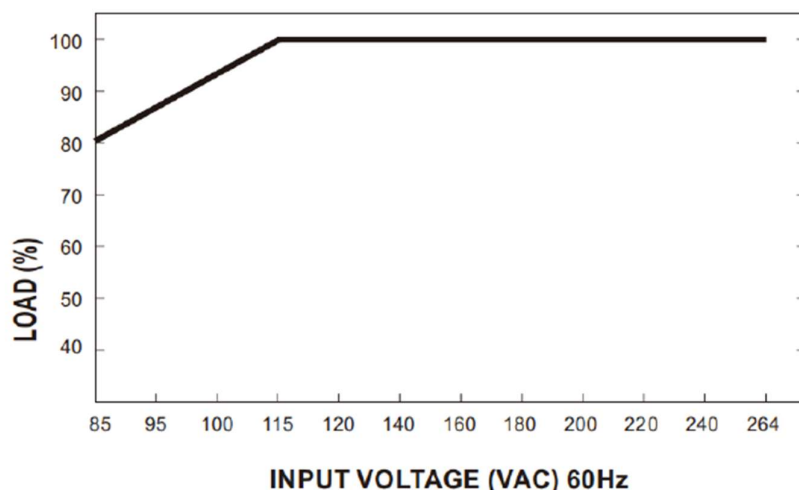

1. If the power supply is continuously operated outside the rated power curve, it may lead to component degradation or damage, as shown in Figures 1 and 2.
2. When the ambient temperature is below -30°C, the PSU may enter a hiccupping state upon startup, but the startup duration should not exceed 5 seconds.
3. When the ambient temperature exceeds 50°C, the power supply will activate overtemperature protection if the output power is not reduced. Once activated, the power supply protector will operate intermittently until the ambient temperature decreases or the load returns to its normal operating state. To restart, the input AC voltage must be released or reset.
4. To ensure proper functioning, the power supply must maintain a safe distance from other equipment during operation, as specified in the Safety Guidelines section.
5. Note: Depending on the ambient temperature and the load connected to the power supply, the power supply may overheat.

Function

Figure 1) Diagram of Turn-on Time, Rise Time, and Hold Time

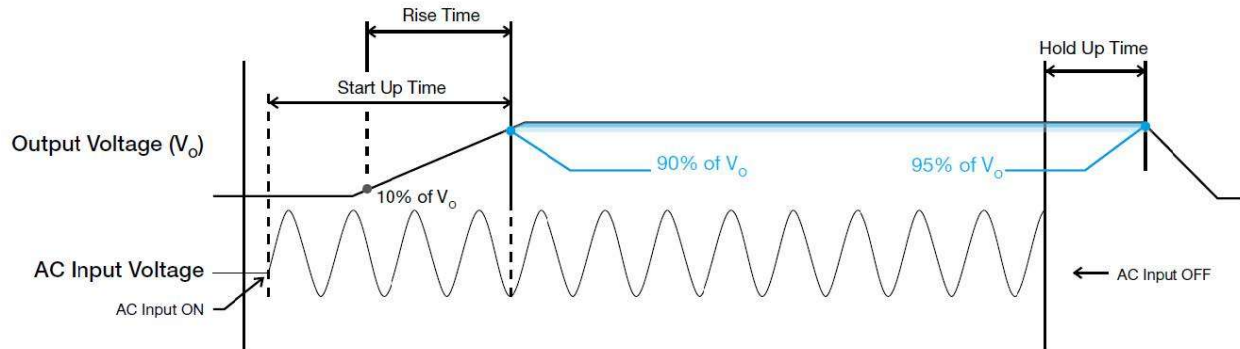
Available Machine Time:


The time required for the output voltage to rise to 90% of the rated value after the input voltage is applied.

Rise Time:

The time required for the output voltage to change from 10% to 90% of its final steady-state value.

Retention Time:


The time interval between the interruption of the AC input voltage and the output voltage dropping below 95% of its final steady-state value.

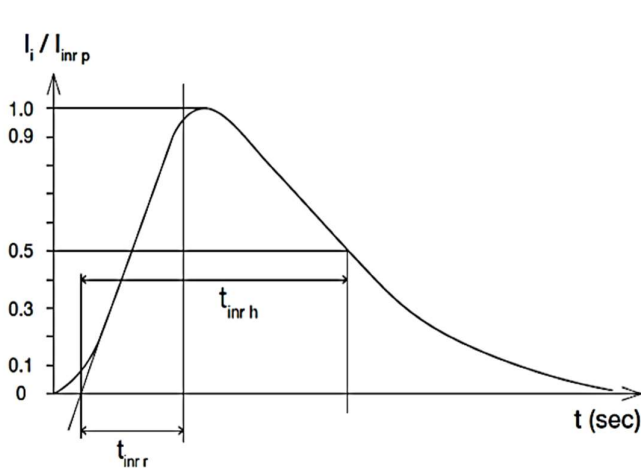
Surge Current

Surge current refers to the instantaneous peak current generated upon the activation of the input voltage. Under AC input voltage, the maximum surge current occurs during the upper half-cycle of the AC voltage, with its peak value declining exponentially in subsequent cycles.

Overload and overcurrent protection (automatic recovery)

When the output current exceeds 110% of I_o (maximum load), the power supply's overload (OLP) and overcurrent (OCP) protection mechanisms are triggered. In this scenario, V_o begins to decrease; once the power supply reaches its maximum power limit, the protection is activated, and the power supply enters "hiccup mode" (automatic recovery). Once the OLP or OCP failure is resolved and I_o returns to the normal range, power can be restored.

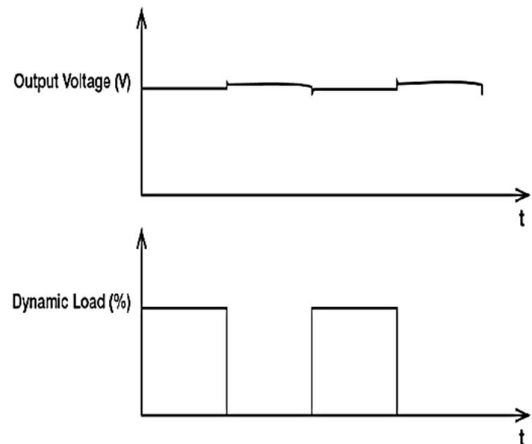

Dynamic Response

When the dynamic load varies dynamically from 10% to 100%, the power supply output voltage maintains a stable regulation rate of $\pm 10\%$.


Overvoltage protection (automatic recovery)

When internal feedback fails, the power overvoltage circuit is triggered, and the output voltage must not exceed the range specified in the "Protection" section. The power supply resumes normal operation after protection and fault resolution.

Function

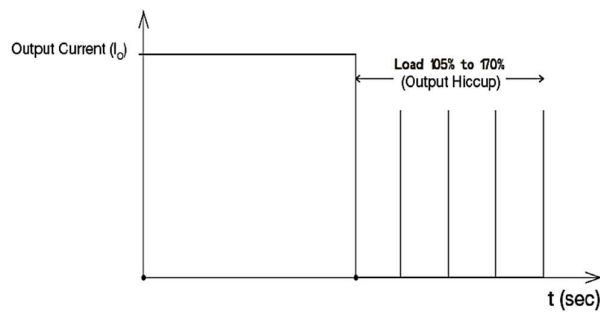
Short-circuit protection (automatic recovery)

The OLP/OCPP power output function also provides short-circuit protection. During a short circuit, the output current operates in a "hiccup mode," and the power supply returns to normal operation once the short circuit is resolved.

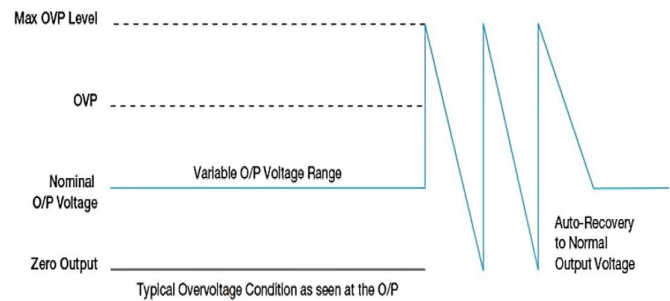
Overtemperature protection (automatic recovery)

As described in the Load Derating section, the power supply incorporates overtemperature protection (OTP) functionality. If the operating temperature exceeds the specified limits under 100% load conditions, the OTP circuit is triggered, and the output voltage enters a hiccup mode until the temperature returns to the normal operating range recommended by the derating chart.