

Features

- Universal input 90~264V AC
- Approved to UKCA, CE, cULus, RCM (C-Tick), CCC, FCC, PSE, RoHS
- UL 62368-1 Safety Approved
- Single Output 48V
- OVP, OCP, OTP, SCP



Image for Illustration Purpose
Models may vary

Ideal Power's 14GJ180WD-xyW1-RS 180W AC/DC External Desktop Power Supply (PSU) Series are certified to UKCA, CE, TUV-GS, cULus, RCM (C-Tick), CCC, FCC, RoHS & UL 62368-1 Standards and comply with the relevant Efficiency Regulations. These are primarily used in ITE, Audio & Video Industries and customised solutions are available upon request.

Models

Model Number	Output Voltage (V DC)	Output Current (A)	Output Power (W)	Efficiency (Typ)
14GJ180WD-4800375W1-RS	48	3.75	180	88

Input Data

	Min	Typical	Max	Units	Notes
Input Voltage	90	--	264	V AC	100-240VAC +/- 10%
Input Frequency	47	--	63	Hz	50-60Hz +/- 5%
Input Current	--	--	0.5	A	
Inrush Current	0	--	60	A	At cold start, 100 / 240V AC
Leakage Current	--	--	0.25	mA	

Output Data

	Min	Typical	Max	Units	Notes
Output Current Range	0.0	--	13.75	A	
Ripple & Noise	--	--	200	mVp-p	
Line Regulation	--	±5	--	A	@ 100 Vac to 240 Vac input & Full load
Load Regulation	--	±5	--	%	
Turn-on Delay Time	--	--	3	S	@ 100 Vac to 240 Vac input & Full load
Hold-up Time	5	--	--	S	@ Full load & 115Vac at full load

Protection Requirements

	Min	Typical	Max	Units	Notes
Over Current Protection	4.2	--	7.5	A	Will recover if fault condition is removed
Short Circuit Protection					Will recover if fault condition is removed
Over Voltage Protection					Will recover if fault condition is removed

Environmental Data

	Min	Typical	Max	Units	Notes
Operating Temperature	0	--	+40	°C	
Storage Temperature	-20	--	+80	°C	
Operating Humidity	10	--	90	%	non condensing
Relative Humidity	10	--	90	%	non condensing

Reliability Requirements

	Min	Typical	Max	Units	Notes
Dielectric Strength	--	--	--	--	Primary to secondary: 1500Vac/10mA /60S for type test.
Leakage Current	--	--	0.25	mA	@ 264Vac / 50H
Insulation Resistance	50	--	--	mΩ	@primary to secondary add 500Vdc test voltage

EMC Emissions (2014/30/EU)

	Standard	Test Level	Criteria	Notes
Radiated & Conducted	EN 55032	Pass	B	EMC Directive 2014/30/EU
	EN 55014	Pass	B	
	EN 55015	Pass	B	
	FCC Part 15	Pass	B	


EMC Immunity (2014/30/EU)

	Standard	Test Level	Criteria	Notes
ESD	IEC 61000-4-2		B	Contact: +/- 4KV; Air: +/- 8KV
RFI	IEC 61000-4-3		A	80-1000MHz Field Strength: 3 V/m with 80% amplitude modulation of 1 kHz
EFT	IEC 61000-4-4		B	Power Line 1kV, Signal Line 0.5kV
Surge	IEC 61000-4-5		A	Line to Line: +/- 1KV (peak); Line to F.G: +/- 2KV (peak)

Safety Approvals

	Safety Standards
Safety Standards	EN 55032, UL 62368-1, approved
Approvals	UKCA, CE, TUV-GS, cULus, RCM (C-Tick), CCC, FCC, PSE, RoHS

Mechanical Drawing

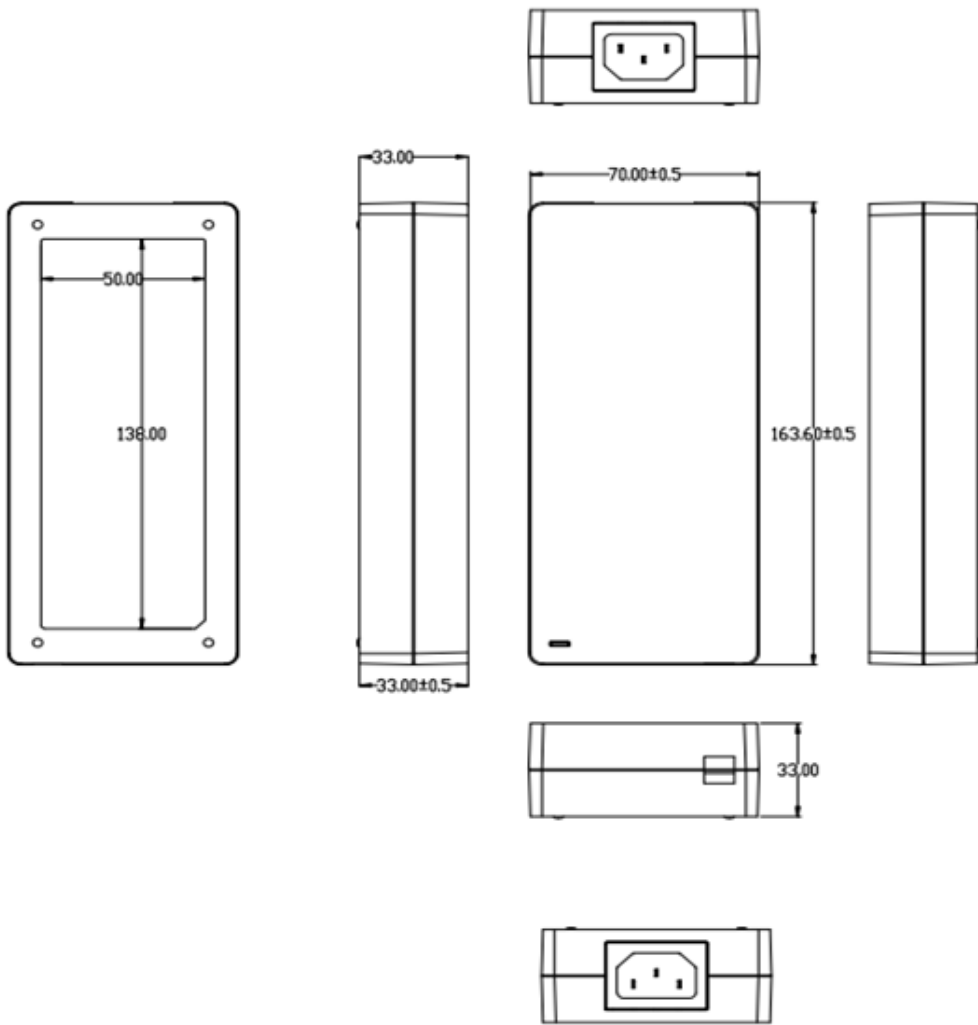

Typical Label:

RS PRO

AC ADAPTOR (电源适配器)

RS stock No (库存号) : 123-4567

MODEL (型号) : GJ180WD-4800375W1

INPUT (输入) : 100-240V~50/60Hz 2.5A

OUTPUT (输出) : 48.0V \equiv 3.75A 180.0W

MADE IN CHINA (中国制造)

YYWW (VI)

UL Japan
株式会社

Tested To Comply
With FCC Standards
FOR HOME OR OFFICE USE

UL US
LISTED
E487891
I.T.E. POWER SUPPLY

AC - DC

Cable Drawing

Typical Cable drawing

