

Features

- 2:1/4:1 Wide Input Range
- Half Brick
- Operating Temperature Range: -45~105°C
- Approved to UKCA, CE, RoHS & REACH
- Safety Standards to IEC/EN 62368-1 & EN 60950-1
- Efficiency up to 89%
- Single output 9~425V DC



Certified to UKCA, CE, RoHS, REACH & EN 62368-1/IEC 62368-1/EN 50155 Standards and complies with Efficiency Regulations. These are primarily used in ITE, Audio & Video, Railway Industries and customised solutions are available upon request.

Part Number Structure

28SHBS	-	110	120	-	V	-	P	-	B	100
Series Name		Input Voltage (VDC)	Output Voltage (VDC)		Pin out		Remote control option		Shape	Watt
Supreme series		024W : 9-36	050 : 5		V : Vicor		P : Positive logic		B : Base Plate	50
Half		024 : 18-36	120 : 12				N : Negative logic			100
Brick		048W : 18-75	240 : 24							
Second		110 : 40-160	280 : 28							
		300 : 180-425	480 : 48							


Models

Model	Input		Current (A) Full load	Voltage (V)	Output		Efficiency Typ.(%)
	Range	Nominal			Current (A)	Power (W)	
28SHBS024W050-V-□-B50	9-36	24	2.37	5	10	50	88
28SHBS024W120-V-□-B50	9-36	24	2.34	12	4.17	50	89
28SHBS024W240-V-□-B50	9-36	24	2.34	24	2.08	50	89
28SHBS024W280-V-□-B50	9-36	24	2.34	28	1.79	50	89
28SHBS024W480-V-□-B50	9-36	24	2.34	48	1.04	50	89
28SHBS024W050-V-□-B100	9-36	24	4.73	5	20	100	88
28SHBS024W120-V-□-B100	9-36	24	4.68	12	8.33	100	89
28SHBS024W240-V-□-B100	9-36	24	4.68	24	4.17	100	89
28SHBS024W280-V-□-B100	9-36	24	4.68	28	3.57	100	89
28SHBS024W480-V-□-B100	9-36	24	4.68	48	2.08	100	89
28SHBS024050-V-□-B50	18-36	24	2.37	5	10	50	88
28SHBS024120-V-□-B50	18-36	24	2.34	12	4.17	50	89
28SHBS024240-V-□-B50	18-36	24	2.34	24	2.08	50	89
28SHBS024280-V-□-B50	18-36	24	2.34	28	1.79	50	89
28SHBS024480-V-□-B50	18-36	24	2.34	48	1.04	50	89
28SHBS024050-V-□-B100	18-36	24	4.73	5	20	100	88
28SHBS024120-V-□-B100	18-36	24	4.68	12	8.33	100	89
28SHBS024240-V-□-B100	18-36	24	4.68	24	4.17	100	89
28SHBS024280-V-□-B100	18-36	24	4.68	28	3.57	100	89
28SHBS024480-V-□-B100	18-36	24	4.68	48	2.08	100	89
28SHBS048W050-V-□-B50	18-75	48	1.18	5	10	50	88
28SHBS048W120-V-□-B50	18-75	48	1.17	12	4.17	50	89
28SHBS048W240-V-□-B50	18-75	48	1.17	24	2.08	50	89
28SHBS048W280-V-□-B50	18-75	48	1.17	28	1.79	50	89
28SHBS048W480-V-□-B50	18-75	48	1.17	48	1.04	50	89
28SHBS048W050-V-□-B100	18-75	48	2.37	5	20	100	88
28SHBS048W120-V-□-B100	18-75	48	2.34	12	8.33	100	89
28SHBS048W240-V-□-B100	18-75	48	2.34	24	4.17	100	89
28SHBS048W280-V-□-B100	18-75	48	2.34	28	3.57	100	89
28SHBS048W480-V-□-B100	18-75	48	2.34	48	2.08	100	89
28SHBS110050-V-□-B50	40-160	110	0.52	5	10	50	88
28SHBS110120-V-□-B50	40-160	110	0.51	12	4.17	50	89
28SHBS110240-V-□-B50	40-160	110	0.51	24	2.08	50	89
28SHBS110280-V-□-B50	40-160	110	0.51	28	1.79	50	89
28SHBS110480-V-□-B50	40-160	110	0.51	48	1.04	50	89
28SHBS110050-V-□-B100	40-160	110	1.03	5	20	100	88
28SHBS110120-V-□-B100	40-160	110	1.02	12	8.33	100	89
28SHBS110240-V-□-B100	40-160	110	1.02	24	4.17	100	89
28SHBS110280-V-□-B100	40-160	110	1.02	28	3.57	100	89
28SHBS110480-V-□-B100	40-160	110	1.02	48	2.08	100	89
28SHBS300050-V-□-B50	180-425	300	0.19	5	10	50	88
28SHBS300120-V-□-B50	180-425	300	0.19	12	4.17	50	89
28SHBS300240-V-□-B50	180-425	300	0.19	24	2.08	50	89
28SHBS300280-V-□-B50	180-425	300	0.19	28	1.79	50	89

28SHBS300480-V-□-B50	180-425	300	0.19	48	1.04	50	89
28SHBS300050-V-□-B100	180-425	300	0.38	5	20	100	88
28SHBS300120-V-□-B100	180-425	300	0.37	12	8.33	100	89
28SHBS300240-V-□-B100	180-425	300	0.37	24	4.17	100	89
28SHBS300280-V-□-B100	180-425	300	0.37	28	3.57	100	89
28SHBS300480-V-□-B100	180-425	300	0.37	48	2.08	100	89

Description

Ideal Power **Supreme series - Half Brick** - Second generation converter is composed of Isolated, board-mountable, fixed switching frequency DC-DC converters that use synchronous rectification to achieve extremely high-power conversion efficiency. These DC-DC converter modules use advanced power processing, control, and packaging technologies to enhance the performance, flexibility, reliability, and cost effectiveness of mature power components. Each module is six-sided metal case enclosed to provide protection from the harsh environments seen in many industrial and transportation applications.

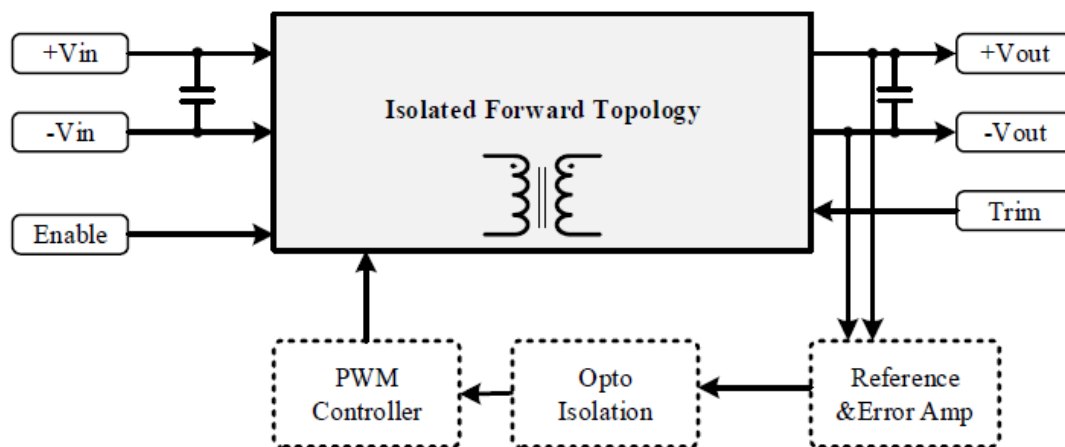

Input Data

Parameter	Notes and Conditions	Min.	Typ.	Max.	Unit
Transient Input Voltage Ranges	28SHBS024W models (100ms Max)			50	VDC
	28SHBS024 models (100ms Max)			50	
	28SHBS048W models (100ms Max)	--	--	80	
	28SHBS110 models (100ms Max)			250	
	28SHBS300 models (100ms Max)			500	
Operating Input Voltage Ranges	28SHBS024W models	9	24	36	VDC
	28SHBS024 models	18	24	36	
	28SHBS048W models	18	48	75	
	28SHBS110 models	40	110	160	
	28SHBS300 models	180	300	425	
Under-Voltage Lockout Start up Voltage	28SHBS024W models			9	VDC
	28SHBS024 models			18	
	28SHBS048W models	--	--	18	
	28SHBS110 models			40	
	28SHBS300 models			180	
Under-Voltage Lockout Shutdown Voltage	28SHBS024W models		8		VDC
	28SHBS024 models		17		
	28SHBS048W models	--	17	--	
	28SHBS110 models		38		
	28SHBS300 models		170		
Input filter	All models, Built-in PI filter				

General Specifications & Environmental Data

Parameter	Notes and Conditions		Min.	Typ.	Max.	Unit
Storage temperature range	All models		-60	--	125	C
Switching Frequency	VNOM		180	--	300	kHz
Operating case temperature	All models		-40	--	100	m
Over temperature protection	All models, Auto. Recovery		--	105	--	C
Isolation Voltage Input to Output	All models, 1 Minute		2250	--	--	VDC
Isolation Resistance	All models, 500VDC, At 70%RH		100	--	--	MΩ
Input to Output						
Isolation Capacitance	All models		--	1500	--	pF
Input to Output						
Humidity (non-condensing)	All models		--	--	95	%
Calculated MTBF	BellCore-TR-332@ 50°C G.B		--	1.5	--	M HR
Thermal shock	Environmental Engineering Experimental Tests		MIL-STD-810F			
Vibration			MIL-STD-810F			
Drop			MIL-STD-810F			
Weight	Shape-B		95(3.35)			g
Dimensions	Shape-B		2.42" x 2.40" x 0.59" (61.4 x 61.0 x 15.0mm)			
Case Material	Aluminium					
Potting material	Silicone					
Enable Function Input	Negative logic	ON OFF	Short or 0 ~ 1.2 Open			VDC
Enable Function Input	Positive logic	ON OFF	Open Short or 0 ~ 1.2			VDC

Output Data

Parameter	Notes and Conditions	Min.	Typ.	Max.	Unit
Output Voltage Accuracy	VNOM 50% Load	--	--	±1.5	%
Line Regulation	Low Line to High Line	--	--	±0.3	%
Load Regulation	10% to 100% Load	--	--	±0.5	%
Ripple & Noise Voltage	Bandwidth 20MHz and with 1μF MLCC Output Capacitor	--	1.5	--	%Vpk-pk
Temperature Coefficient	--	--	--	+0.04	% / °C
Transient Recovery Time	25% load step change	--	800	--	μSec
Transient Peak Deviation	ΔIo/Δt=2.5A/us	--	+2	--	%Vo
Start-Up Time	When use Enable Function	--	20	--	mSec.
Trimming Output Protection	VNOM 10% Load	--	+10	--	%
Output power protection	VNOM 10% Load	--	120	--	%
Over Voltage Protection	VNOM	--	120	--	%

Standards Compliance

Parameter	Standard	Test conditions	Performance criteria
Environmental Compliance	Reach; RoHS	--	Pass
EMI	EN55022	--	Class A / Class B
ESD	EN61000-4-2	±4 kV Air Discharge ±4 kV Contact Discharge	Crit. A


Radiated Immunity	EN61000-4-3	Level 2, 3 V/m	Crit. A
Fast Transient	EN61000-4-4	±2 kV Applied	Crit. A
Surge	EN61000-4-5	±2 kV Applied	Crit. A
Conducted Immunity	EN61000-4-6	Level 2, 3 V rms	Crit. A

It is recommended to protect the input by fuses or other protection devices.

Modules could meet EN55022 Class A and Class B standard with external components.

The information and specifications contained in this data sheet are believed to be correct at time of publication. All specifications are subject to change without notice. No rights under any patent accompany the sale of any such products or information contained herein


Mechanical Drawings & Pin Assignment

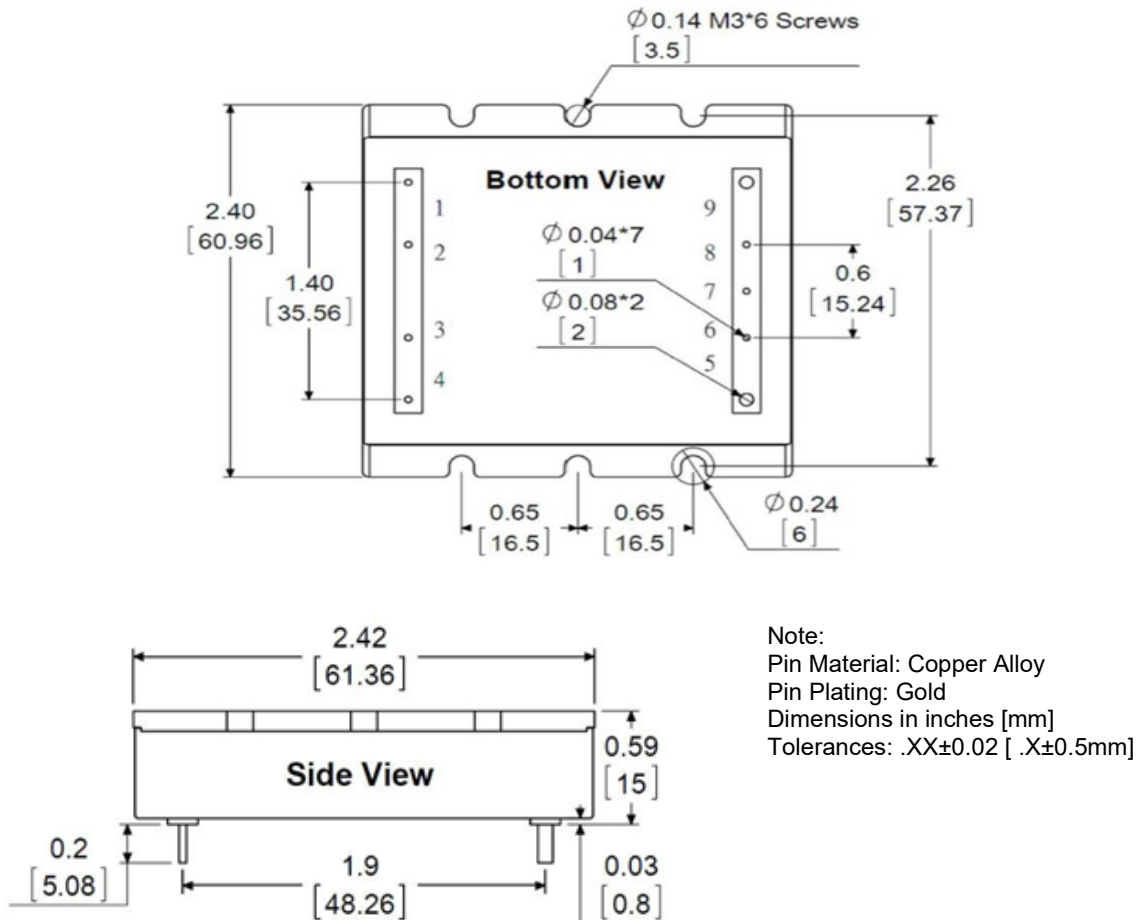

Pin#	Function
1	-Vin
2	NC
3	Enable
4	+Vin
5	+Vout
6	+Sense
7	Trim
8	-Sense
9	-Vout

Conducted EMI

Input terminal value (typ.) 28SHBS110120-V-P-B100-IP @Vin = 110VDC, Iout = 8.3A

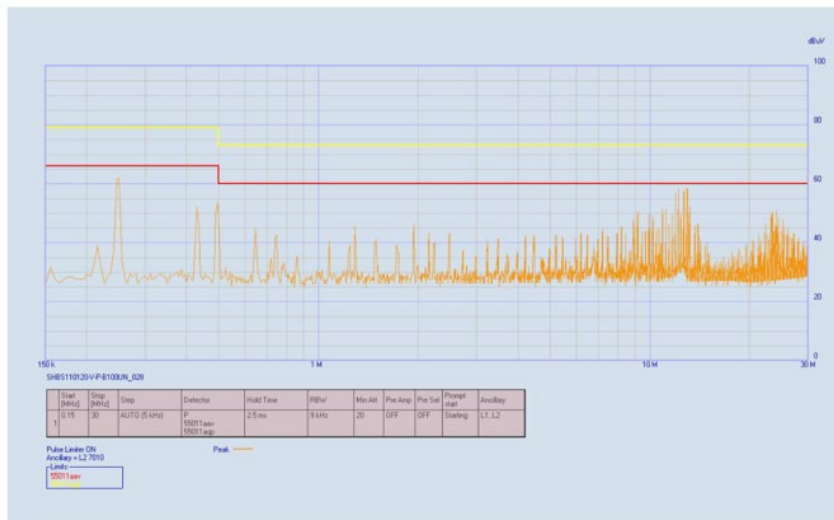

Characteristic Curves

Testing conditions are at typical input, Ta=+25°C, full load (horizontal mount) Unless otherwise indicated

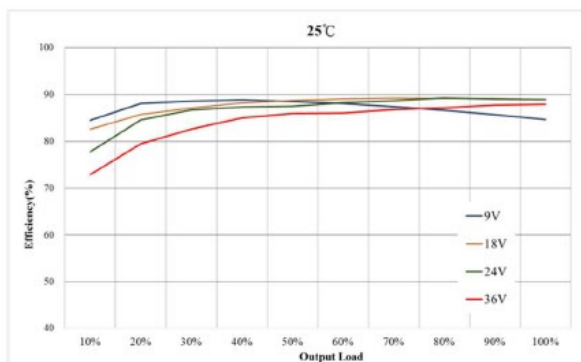


Figure 1 : Efficiency at Minimum, Nominal and Maximum Input Voltages VS. Output Load.

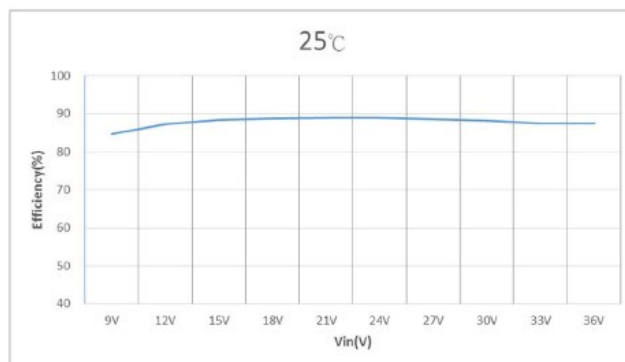


Figure 2 : Efficiency VS. Input Voltages at 100% rated power

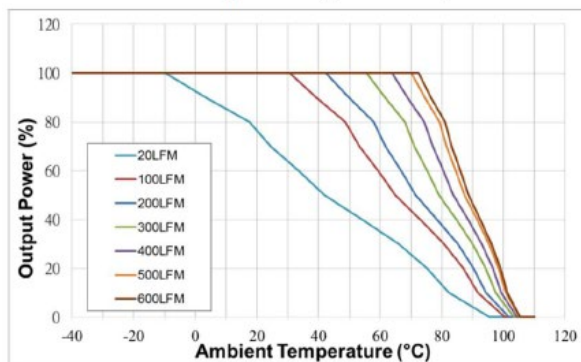


Figure 3 : Ambient Temperature VS. Output Power Derating Curves (Note: 20LFM = Free Air)

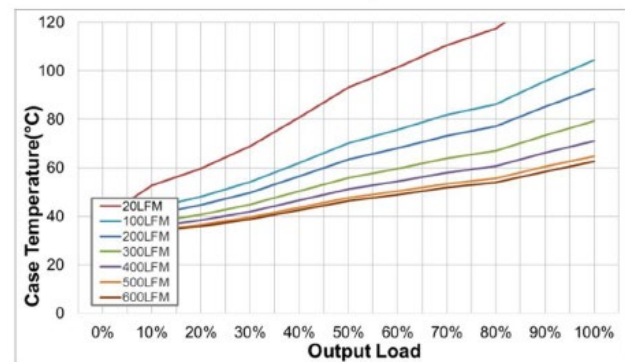


Figure 4 : Case Temperature VS. Output rated Power (Note: 20LFM = Free Air)

Characteristic Curves

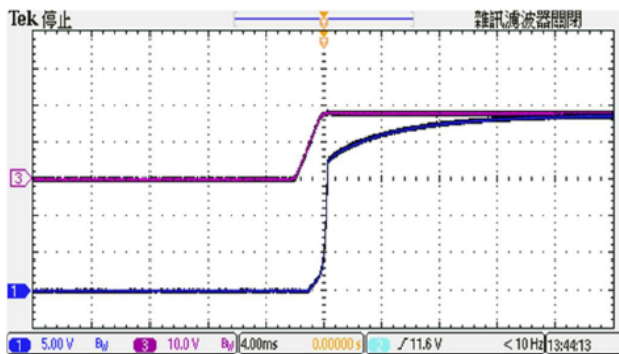


Figure 5 : CH1 = Vout, CH3 = Nominal Input
Typical Start-up waveform at Full load.

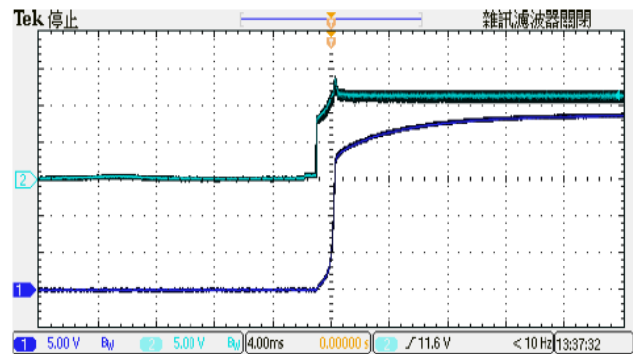


Figure 6 : CH1 = Vout, CH3 = Enable Pin
Typical Start-up waveform. Input voltage pre-applied

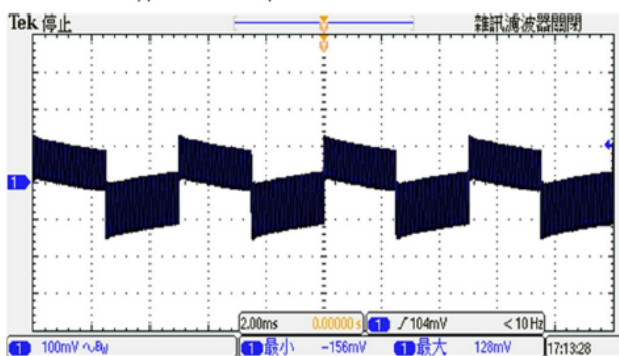


Figure 7 : Transient Response at Output step load
(Vin: Typical, 50~75% of output current; $\Delta I_o/\Delta t = 1A/\mu s$)

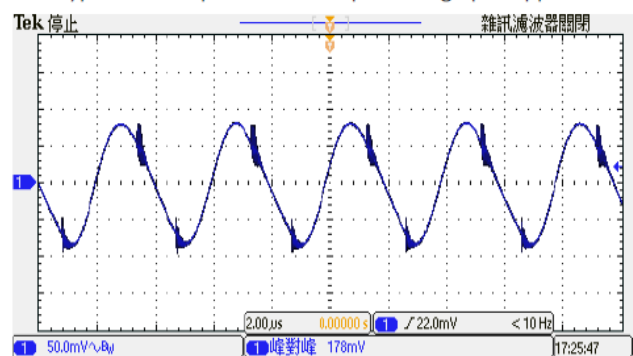


Figure 8 : Output Voltage Ripple & Noise at full load.
(Vin: Typical, With Output Capacitor to add 1uF MLCC)

Trimming Output Voltage – for Single output models

Only the single output converters have a trim function. That allows users to adjust the output voltage from +10% to -10%, please refer to the trim table that follow for details. Adjustments to the output voltage can be used with a simple fixed resistor as shown in Figures 1 and 2. A single fixed resistor can increase or decrease the output voltage depending on its connection.

Note:

※ Trim adjustments higher than the specified range can have an adverse effect on the converter's performance and are not recommended.

※ If the trim function is not used, leave the trim pin open.

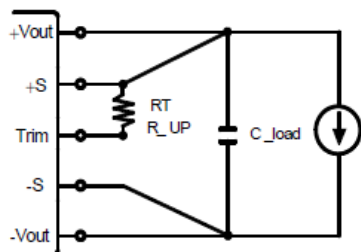


Figure 1. Trim Connections To increase Output Voltages Using Fixed Resistors

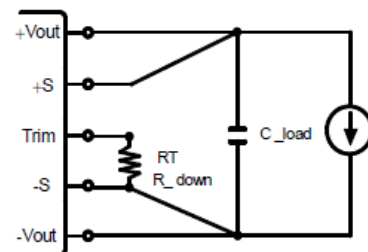


Figure 2. Trim Connections To Decrease Output Voltages Using Fixed Resistors

Trim up resistor value(KΩ)

Vout	1%	2%	3%	4%	5%	6%	7%	8%	9%	10%
5	109	50	30	20	14	10	7	5	3.3	2
12	258	115	67	44	29	20	13	7.8	3.8	0.6
24	514	232	137	90	62	43	30	20	12	5.5
28	602	271	161	105	72	50	34	22	13	5.9
48	1039	464	273	177	120	81	54	34	18	5

Enable Control Function

The primary-side, Enable Control function can be specified to operate with either positive or negative polarity. Positive-polarity devices are enabled when the enable pin is left open or is pulled high. See "Enable Function Input." Positive-polarity devices are disabled when the enable pin is pulled low (under +1.0V with respect to -input). Negative-polarity devices are off when the enable pin is high/open and on when the enable pin is pulled low. See Figure 3.

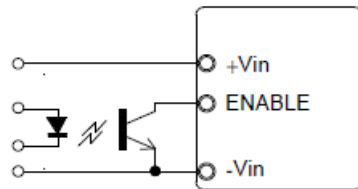


Figure 3. Driving the Enable Control pin

Trim down resistor value(KΩ)

Vout	-1%	-2%	-3%	-4%	-5%	-6%	-7%	-8%	-9%	-10%
5	137	62	37	25	17	12	9	6	4	2.2
12	358	162	96	63	44	31	21	14	8.9	4.5
24	769	352	213	143	102	74	54	39	28	18
28	860	392	236	158	111	80	57	41	28	17
48	1413	638	380	251	173	121	85	57	35	18

Output Ripple Noise

The two copper strips simulate real-world PCB impedances between the converter and its load. Scope measurements should be made using BNC connectors or the probe ground should be less than 1/2 inch and soldered directly to the fixture.

All external capacitors should have appropriate voltage ratings and be located as close to the converter as possible.

Temperature variations for all relevant parameters should be taken into consideration. The most effective combination of external I/O capacitors will be a function of line voltage and source impedance, as well as load and layout conditions.

See Figure 4

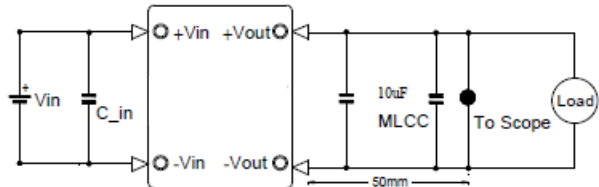


Figure 4. Measuring Output Ripple/Noise(20MHz bandwidth)