

Features

- Universal input 100-240VAC
- Output Power: 24-48W
- Plastic Enclosure
- Approved to UKCA, CE
- LVD & EMC Class B Certified,
- RoHS & REACH compliant
- 12V Lead Acid 3 Stage Control
- (Fast/Normal/Float)
- OVP, OCP, OTP, SCP
- Dimensions: Dependent on Model
- Weight: Dependent on Model



31ACWW12_24A Series


Range of 12-24V Lead Acid Battery Chargers



The 31ACWW12_24A Series is a versatile and reliable Range of 12-24V Lead Acid Battery Chargers. Designed for use in applications such as automation and control within IT and AV systems. This series is supplied with a IEC C8 input connection and supports input voltages of 90~264V AC 47~63Hz.


Models	31AC0212A	31AC0224A
Input Voltage	100V ~ 240V universal	
Input Frequency	47Hz ~ 63Hz	
Output Max Current	2Amp	2Amp
Output Volts	12V	24V
Output Power	24W	48W
Max Charging Current	2A +/- 0.2A	
Working Temperature	0 ~ 50 °C	
Hold up Time	8 ms at full load output power and 115 Vac input	
Battery Application	Lead Acid Battery	
LED - Charging	Red	
LED - Charged	Green	
Mains Lead	1.8M EURO Plug + 1.8M UK Fuse Plug	
DC Cable	SPT2, 2C, 18AWG, 1.8M mount clips	
Dimensions	119 x 61 x 37 (LxWxH) mm	
Weight	0.5 (Kgs)	
Safety	CE, CUL	
Specifications are subject to change without notice.		

Three Steps of Charging & Charge Curve

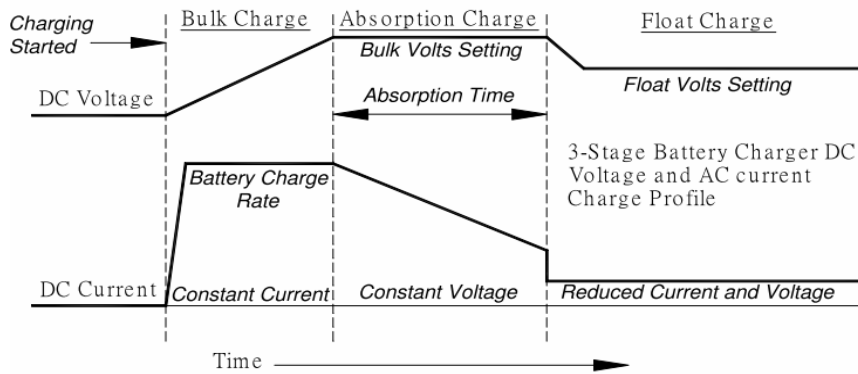


Step 1	Bulk charge – bring batteries to 75% capacity fast. During this stage charging occurs at full power, which means maximum current, until the battery voltage reached the set limit.
Step 2:	Absorption Charge, boost – slow the current flow, adjusting for maximum efficiency and gently topping off batteries. During absorption charging the current decreases as the battery approached full charge.
Step 3	Trickle Charge – for longer period, maintains fully charged batteries without harmful effects of overcharging and cooking. Trickle charge is intended to keep the battery in a fully charged state and compensates for self-discharge. When the current reaches setting point the battery switches to a maintenance charge at a constant voltage. Should the battery be in use and the charge current Subsequently exceed setting point the charger will automatically return to the beginning of the three-step charge characteristic.



Case Drawing

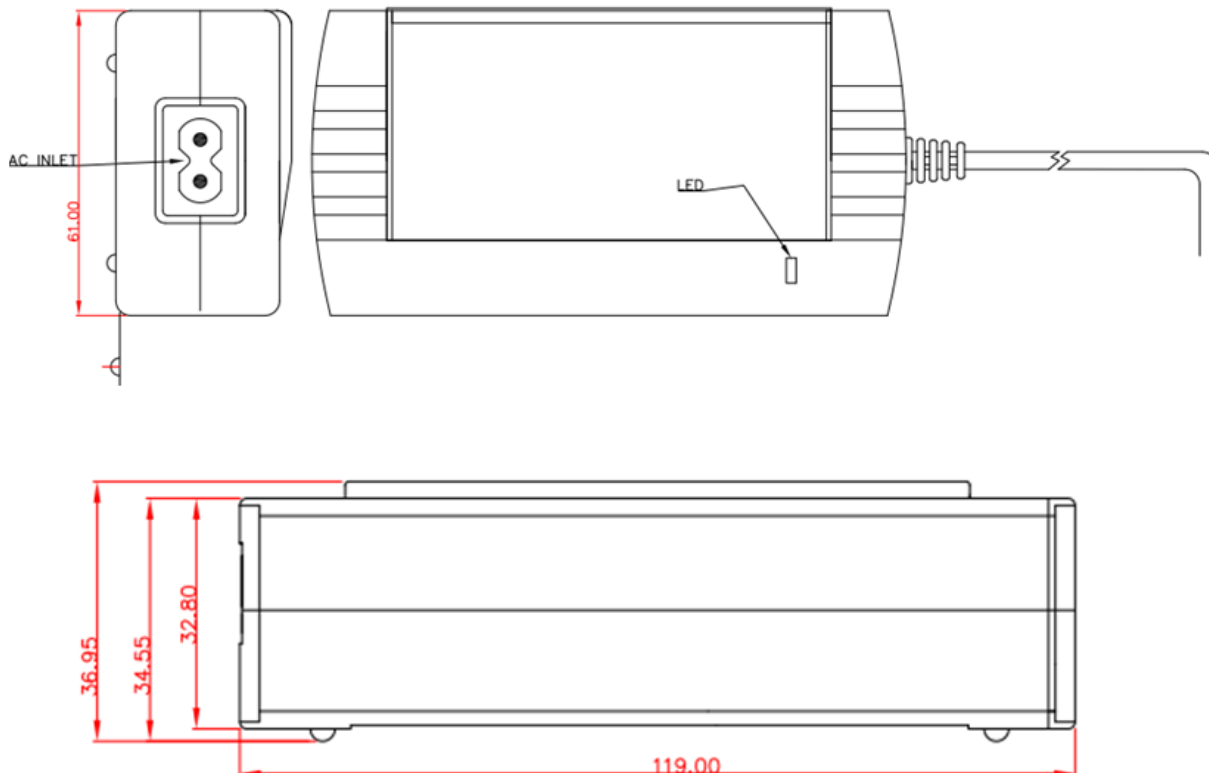


Drawings

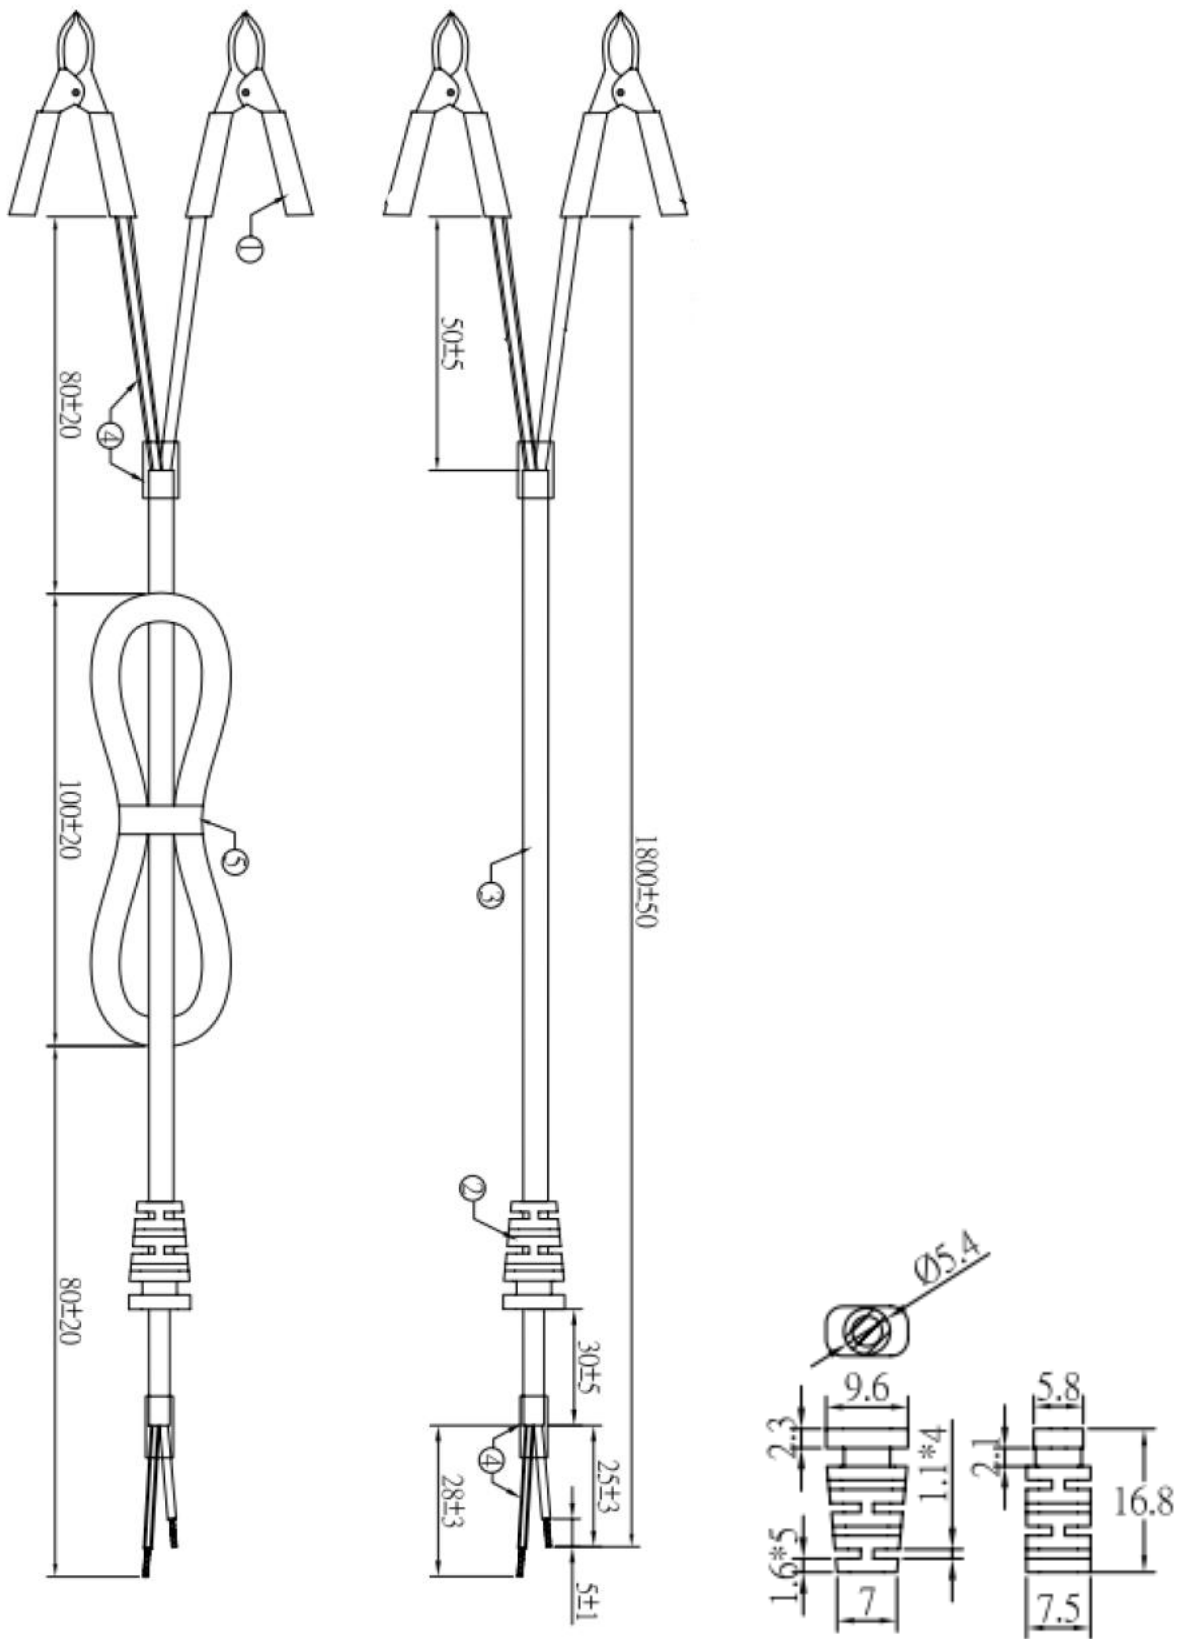

Mains Lead

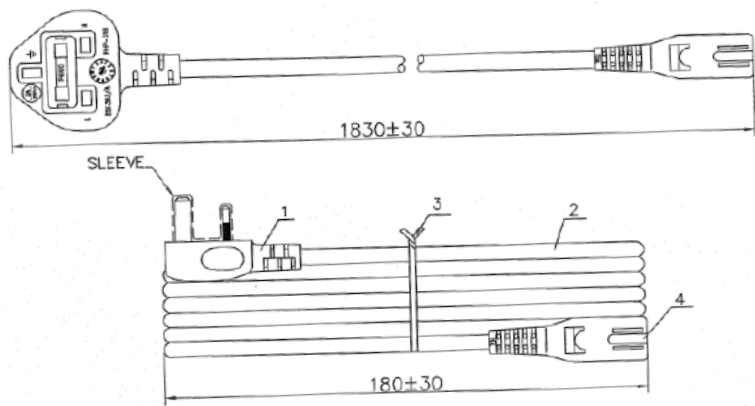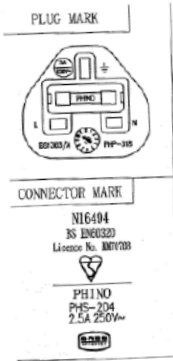


1. PVC MOLDED PLUG: PHP-318 (FUSE=3A, BLACK)
 2. PVC FLEXIBLE CORD: H03VVH2-F 2X0.75mm² (BLACK)
 3. ELLIPTIC TIE (BLACK)
 4. PVC MOLDED CONNECTOR: PHS-204 (BLACK)
- NOTE: ALL MATERIALS ARE RoHS COMPLIANCE.




CORD MARKING:

PHINO Ccbe H03VVH2-F 2X0.75mm² <VDE> KEMA-KEUR IEMMEQU ++++++ <VDE>
 CESEC (S) (U) (D) (F) SABS SANS 60227-5 60227 IEC 52 300/300V CE Cc -LF- CHINA FACTORY

PART NO.		TITLE	POWER SUPPLY CORD PHP-318 TO PHS-204		
		INTERNAL NO.	P318-0447-1		
DESIGNED	ZhongGuangHuo 2017.10.27	UNIT	MM	SCALE	FREE
CHECKED	[Signature]	MATERIAL	PHINO		
APPROVED	[Signature]	PROJECTION			

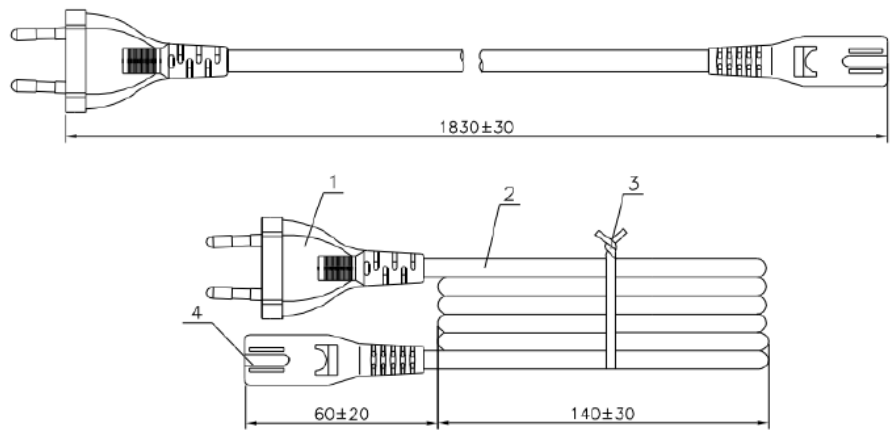

1. PVC MOLDED PLUG: PHP-205 (BLACK)
2. PVC FLEXIBLE CORD: H03VVH2-F 2X0.75MM² (BLACK)
3. VINYL TIE (BLACK)
4. PVC MOLDED CONNECTOR: PHS-204 (BLACK)



CORD MARKING:

PHINO H03VVH2-F 2X0.75mm² <VDE> KEMA-KEUR IEMMEQU ++++++ <VDE>
 <VDE> CESEC (S) (U) (D) (F) LTSA-2F N18895 SABS 1574:2001 227 IEC 52
 CE Cc -LF- CHINA FACTORY

P/N		TITLE	POWER SUPPLY CORD PHP-205 TO PHS-204		
		INTERNAL NO.	P205-S204 050825		
DESIGNED	HUANG LI 2005.05.25	UNIT	MM	SCALE	FREE
CHECKED		MATERIAL	PHINO		
APPROVED		PROJECTION			