

## Features

Universal input 90~264VAC

Direct Australian Fixed Plugtop Adapters

Approved to RCM, RoHS & REACH

EN/IEC 62368-1 Safety Approved

Meets Efficiency Level VI & (EU) 2019/1782

EMC Class B Certified

Single Output 5 - 30V DC

**QR  
Code**

Ideal Power Will Do This

## 25HK-AY-xAz-AU Series

24W External AC/DC AU Plugtop Adapter Power Supply



The 25HK-AY-xAz-AU Series is a consistent and reliable 24W External AC/DC AU Plugtop Adapter Power Supply. Designed for use in applications such as commercial AV, broadcasting and control panels. This series is supplied with a AUS Fixed input connection and supports input voltages of 90~264V AC 47~63Hz.

## Models

Model	Voltage (V)	Output	
		Current (A)	Power (W)
25HK-AY-050A300-AU	5	3	15
25HK-AY-059A300-AU	5.9	3	17.7
25HK-AY-060A300-AU	6	3	18
25HK-AY-090A266-AU	9	2.66	23.9
25HK-AY-100A200-AU	10	2	25
25HK-AY-120A200-AU	12	2	24
25HK-AY-150A160-AU	15	1.6	24
25HK-AY-240A100-AU	24	1	24
25HK-AY-300A080-AU	30	0.8	24

### Input Data

	Min	Typical	Max	Units	Notes
Input Voltage	100		240	V AC	+/- 10%
Input Frequency	47		63	Hz	50-60Hz +/- 5%
Input Current			0.35	A	
Inrush Current			60	A	At cold start, 100 / 240V AC
Leakage Current			0.25	mA	

### Output Data

	Min	Typical	Max	Units	Notes
Ripple & Noise	150		300	mV	@20MHz bandwidth with 10UF/50V capacitance and 104/50V ceramic capacitor. Depending on model
Temperature coefficient			±0.05	%/°C	
Line Regulation			±2	%	
Dielectric Strength					Primary to Secondary: AC 3000Vrms, 4 mA, 1 minute for type test, 2 second for production test.
Input Protection					The switching power supply has a 10-ohm fusing resistor current protect itself.
Over Current Protection					Overload conditions shall decrease the output voltage.
Short Circuit Protection					Auto Recovery
Over Voltage Protection					Will recover if fault condition is removed
Efficiency	≥75%		≥90%		@ average of 25/50/75/100% loads 115V&230VAC input* Depending on model.
Hold up Time					10ms Min at 110VAC full load.
Turn on Time					2S Max at 110VAC full load.

**Note:** \*Test condition will be tested after full load operating for 30min then measure it.

### Environmental Data

	Min	Typical	Max	Units	Notes
Operating Temperature	0		40	°C	
Storage Temperature	-20		+70	°C	
Operating Humidity	10		95	%	Operating 10% to 95%
Storage Humidity	10		95	%	Storage 5% to 95%

### Other Information

	Min	Typical	Max	Units	Notes
Isolation	--	--	--		AC 3000Vrms, 4mA, 1 Minute for type test.
MTBF	--	50,000	--	hrs	
Weight					200 +/-10g
Dimensions					Refer to mechanical drawings

### EMC Emissions (2014/30/EU)

	Standard	Test Level	Criteria	Notes
Conducted	EN 55032	Pass	B	EMC Directive 2014/30/EU
Radiated	EN 55032	Pass	B	
Harmonic Standard	EN 61000-3-2			
Voltage fluctuation	EN 6100-3-3	Pass		Voltage fluctuations & Flicker

### EMC Immunity (2014/30/EU)


	Standard	Test Level	Criteria	Notes
ESD	IEC 61000-4-2	Pass		Contact: +/- 4KV; Air: +/- 8KV
RS	IEC 61000-4-3			Frequency: 80-1000MHz. Field Strength: 3V/M ' 80% AM (1KHz)
EFT	IEC 61000-4-4			0.5/1.0KV on input AC power ports
Surge	IEC 61000-4-5			Line to Line: +/- 1KV (peak); Line to F.G: +/- 2KV (peak)
Conducted	IEC 61000-4-6			CS: 0.15~ 80MHz, 3Vrm, 80% AM, 1kHz
PFMF	IEC 61000-4-8			50 Hz or 60Hz, 1A/m
Dips and Interruptions	IEC 61000-4-11			V/D: >95% reduction for 0.5 period VI:>95% reduction for 250 period.

### Safety Approvals


	Safety Standards
RoHS/REACH	RoHS Directive (EU) 2015/863 & REACH (205 SVHC)
UKCA & CE Directive 2014/35/EU	Yes (UK/European)
cULus & FCC	Yes –(US)
RCM	Yes – (Australia)

## Packaging

Carton Unit:mm

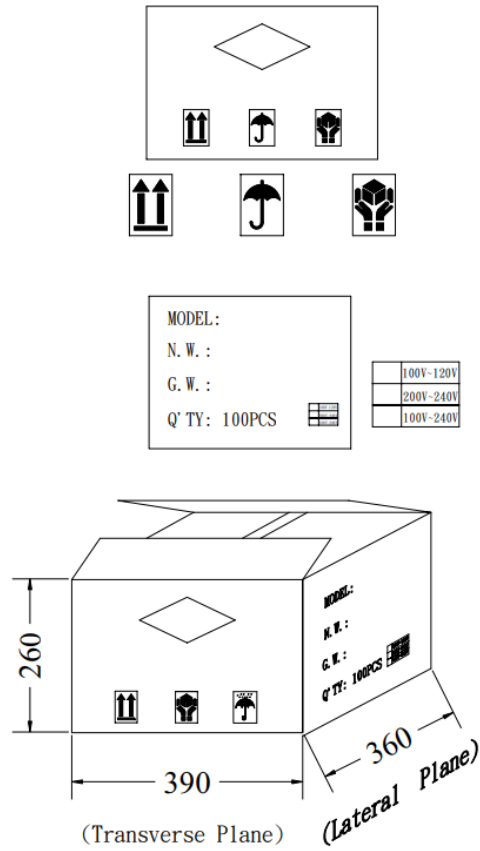

Mechanical Drawing

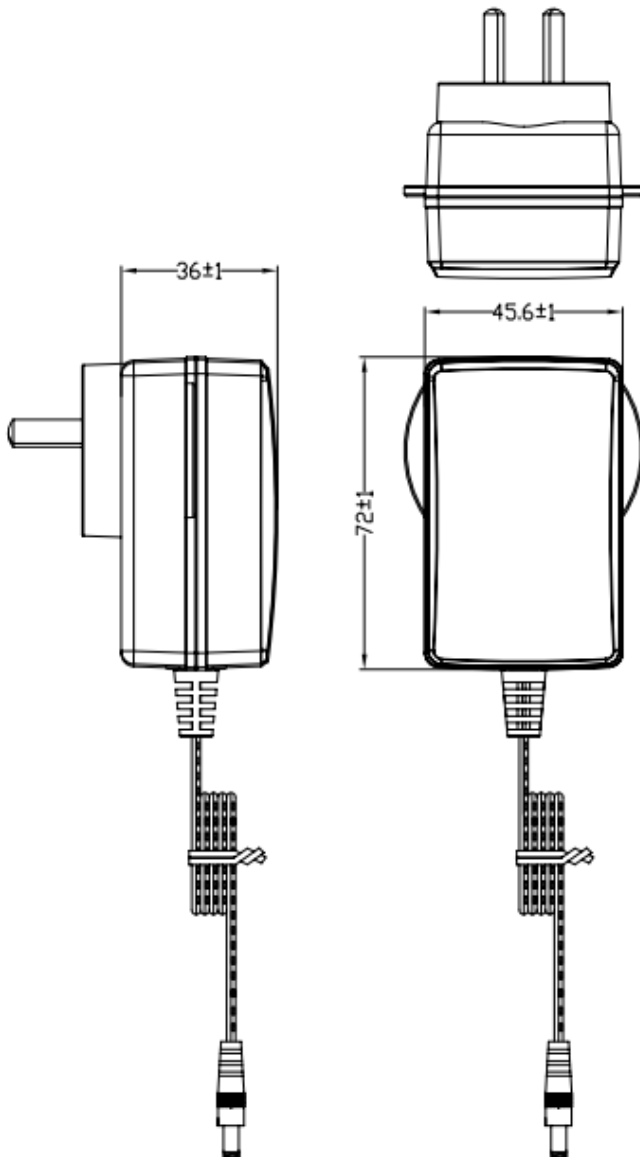

**erie water  
treatment**

SWITCHING POWER SUPPLY

P/N:74312

MODEL: HK-AY

INPUT: 100-240V ~ 50/60Hz 0.8A

OUTPUT: 24.0V = 1.0A 24.0W



0000019830



**CAUTION: RISK OF ELECTRIC SHOCK**  
**MADE IN CHINA MMYYS**