

## Features

- Ultra-wide 85 - 264V AC and 100 - 370V DC input voltage range
- Accepts AC and/or DC input (dual-use of same terminal)
- Operating Temperature Range: -40~+70°C
- Approved to cURus, CE, RoHS
- Safety Standards to IEC/EN/UL62368
- Efficiency up to 80%
- EMC Class A & B
- Single output 3.3~24V DC



Ideal Power's 36LDE06-20Bxx 6W Encapsulated PCB Mount AC/DC Power Supply Converter Series are certified to cRUus, CE, RoHS & IEC/EN/UL62368/EN60335/EN61558 Standards and comply with the relevant Efficiency Regulations. These are primarily used in ITE, Audio & Video Industries and customised solutions are available upon request.

## Models

| Model Number  | Output Power | Output Voltage and Current (Vo/Io) Nominal | Efficiency at 230V AC (%) Typ | Capacitive Load (µF) Max |
|---------------|--------------|--|-------------------------------|--------------------------|
| 36LDE06-20B03 | 4.1W         | 3.3V/1.25mA                                | 70                            | 4000                     |
| 36LDE06-20B05 | 6W           | 5V/1.2A                                    | 76                            | 4000                     |
| 36LDE06-20B09 | 6W           | 9V/660mA                                   | 74                            | 1000                     |
| 36LDE06-20B12 | 6W           | 12V/500mA                                  | 77                            | 820                      |
| 36LDE06-20B15 | 6W           | 15V/400mA                                  | 77                            | 820                      |
| 36LDE06-20B24 | 6W           | 24V/250mA                                  | 80                            | 330                      |

## Input Specifications

|                                 | Conditions | Min |  |  | Typ |  |     | Max |      |                              | Unit |
|---------------------------------|------------|-----|--|--|-----|--|-----|-----|------|------------------------------|------|
|                                 |            |     |  |  |     |  |     |     |      |                              |      |
| Input voltage range             | AC input   | 85  |  |  |     |  | 264 |     |      | VAC                          |      |
|                                 | DC input   | 100 |  |  |     |  | 370 |     |      | VDC                          |      |
| Input frequency                 |            | 47  |  |  |     |  | 63  |     |      | Hz                           |      |
| Input current                   | 115V AC    |     |  |  |     |  |     |     | 0.15 | A                            |      |
|                                 | 230V AC    |     |  |  |     |  |     |     | 0.10 |                              |      |
| Inrush current                  | 115V AC    |     |  |  | 10  |  |     |     |      | A                            |      |
|                                 | 230V AC    |     |  |  | 20  |  |     |     |      |                              |      |
| Recommended External Input Fuse |            |     |  |  |     |  |     |     |      | 1A/250V, Slow blow, required |      |
| Hot Plug                        |            |     |  |  |     |  |     |     |      | Unavailable                  |      |

**Output Specifications**

| Parameter                | Conditions                           | Min                               | Typ      | Max | Unit |
|--------------------------|--------------------------------------|-----------------------------------|----------|-----|------|
| Output voltage accuracy  | 3.3V output<br>Others                |                                   | ±3<br>±2 |     | %    |
| Line regulation          | Full load                            |                                   | ±0.5     |     | %    |
| Load regulation          | 0% - 100% load                       |                                   | ±1       |     | %    |
| Ripple and Noise*        | 20MHz bandwidth (peak to peak value) |                                   | 50       | 100 | mV   |
| Temperature coefficient  |                                      |                                   | ±0.2     |     | %/°C |
| Short circuit protection |                                      | Hiccup, continuous, self-recovery |          |     |      |
| Over current protection  |                                      | ≥ 110%Io, self-recovery           |          |     |      |
| Over voltage protection  | 3.3/5V DC output                     |                                   | ≤7.5V DC |     |      |
|                          | 9V DC output                         |                                   | ≤15V DC  |     |      |
|                          | 12/15V DC output                     |                                   | ≤20V DC  |     |      |
|                          | 24V DC output                        |                                   | ≤30V DC  |     |      |
| Minimum load             |                                      | 0                                 |          |     | %    |
| Hold up time             | 115V AC                              |                                   | 8        |     | ms   |
|                          | 230V AC                              |                                   | 60       |     |      |

**Note:** \* The “parallel cable” method is used for Ripple and noise test, please refer to AC-DC Converter Application Notes for specific information.

**General Specifications**

| Parameter             | Conditions   | Min                             | Typ | Max  | Unit |
|-----------------------|--|---------------------------------|-----|------|------|
| Isolation test        | Input-Output<br>Electric Strength Test for 1min,<br>(Leakage current <5mA) | 4000                            |     |      | V AC |
| Operating Temperature |  | -40                             |     | +70  | °C   |
| Storage Temperature   |  | -40                             |     | +105 | °C   |
| Storage Humidity      |  |                                 |     | 95   | %RH  |
| Soldering Temperature | Wave-soldering   | 260 ± 5°C; time: 5 - 10s        |     |      |      |
|                       | Manual-welding   | 360 ±10°C; time: 3 - 5s         |     |      |      |
| Switching Frequency   |  |                                 | 100 |      | kHz  |
| Power Derating        | -40°C to -25°C   | 2.66                            |     |      | °C   |
|                       | +50°C to +70°C   | 2.66                            |     |      |      |
|                       | 85-100V AC   | 1.0                             |     |      |      |
| Safety Standard       |  | IEC/EN/UL62368                  |     |      |      |
| Safety Certification  |  | IEC/EN/UL62368                  |     |      |      |
| Safety Class          |  | Class II                        |     |      |      |
| MTBF                  |  | MIL-HDBK-217F@25°C ≥ 2602,000 h |     |      |      |



**Mechanical Specifications**

|                |     |  |
|----------------|-----|--|
| Case material  |     | Black plastic, flame-retardant and heat-resistant (UL94 V-0) |
| Dimension      | DIP | 50.8 X 25.4 X 15.36mm  |
| Weight         | DIP | 31g (Typ.)   |
| Cooling method |     | Free air convection  |



## Electromagnetic Compatibility (EMC)

|          |   |  |                  |
|----------|---|--|------------------|
|          |   | CISPR32/EN55032 CLASS B  |                  |
|          | RE  | CISPR32/EN55032 CLASS B  |                  |
| Immunity | ESD   | IEC/EN 61000-4-2 Contact $\pm 6\text{KV}$ /Air $\pm 8\text{K}$   | Perf. Criteria B |
|          | RS  | IEC/EN 61000-4-3 10V/m   | Perf. Criteria A |
|          | EFT   | IEC/EN 61000-4-4 $\pm 2\text{KV}$  | Perf. Criteria B |
|          |   | IEC/EN 61000-4-4 $\pm 4\text{KV}$ (See Fig. 2 for recommended circuit)   | Perf. Criteria B |
|          | Surge   | IEC/EN 61000-4-5 line to line $\pm 1\text{kV}$   | Perf. Criteria B |
|          |   | IEC/EN 61000-4-5 line to line $\pm 2\text{KV}$ / line to ground $\pm 4\text{KV}$<br>(See Fig. 2 for recommended circuit) | Perf. Criteria B |
|          | CS  | IEC/EN61000-4-6 10Vr.m.s   | Perf. Criteria A |
|          | Voltage dips, short interruptions and voltage variations immunity | IEC/EN61000-4-11 0%, 70%   | Perf. Criteria B |

## Characteristic Curve

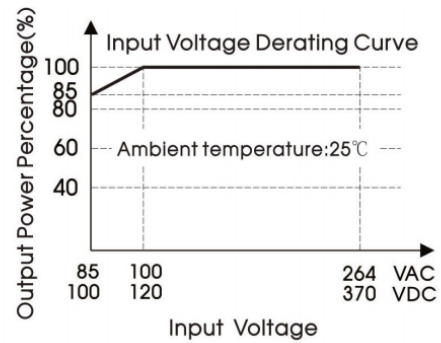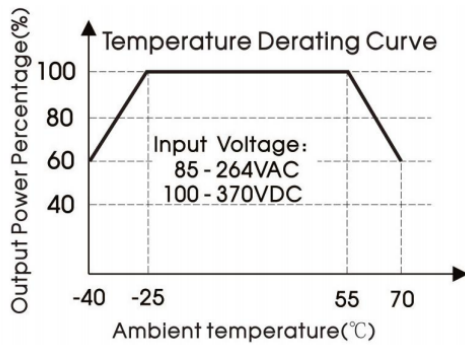


Note: ① With an AC input between 85-100VAC and a DC input between 100-120VDC, the output power must be derated as per temperature derating curves;  
② This product is suitable for applications using natural air cooling.

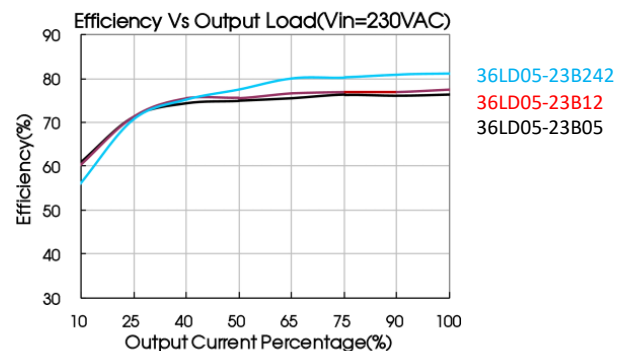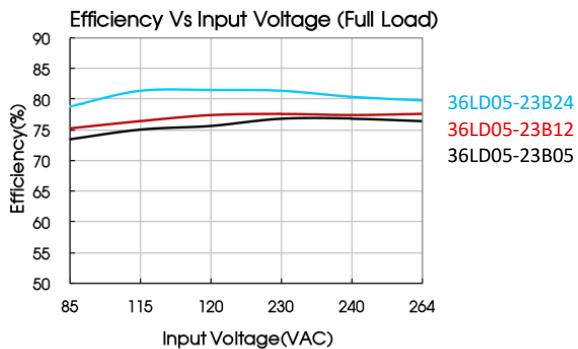

**Design Reference (Figure 1)**

## 1. Typical application

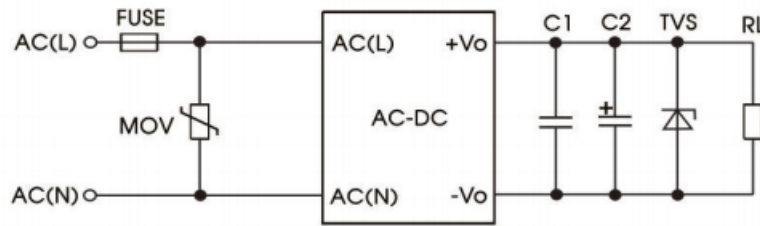


| Element Model | MOV1    | C1        | C2          | Fuse                              | TVS      |
|---------------|---------|-----------|-------------|-----------------------------------|----------|
| 36LDE06-20B03 | S14K350 | 1 $\mu$ F | 220 $\mu$ F | 1A/250V,<br>slow blow<br>required | SMBJ7.0A |
| 36LDE06-20B05 | S14K350 | 1 $\mu$ F | 220 $\mu$ F |                                   | SMBJ7.0A |
| 36LDE06-20B09 | S14K350 | 1 $\mu$ F | 100 $\mu$ F |                                   | SMBJ12A  |
| 36LDE06-20B12 | S14K350 | 1 $\mu$ F | 100 $\mu$ F |                                   | SMBJ20A  |
| 36LDE06-20B15 | S14K350 | 1 $\mu$ F | 100 $\mu$ F |                                   | SMBJ20A  |
| 36LDE06-20B24 | S14K350 | 1 $\mu$ F | 47 $\mu$ F  |                                   | SMBJ30A  |

**Output Filter Components:**

We recommend using an electrolytic capacitor with high frequency, and low ESR rating for C2 (refer to manufacture's datasheet). Choose a capacitor voltage rating with at least 20% margin, in other words not exceeding 80%. C1 is a ceramic capacitor used for filtering high-frequency noise and TVS is a recommended suppressor diode to protect the application in case of a converter failure.


**Design Reference (Figure 2)**

## 2. EMC compliance recommended circuit

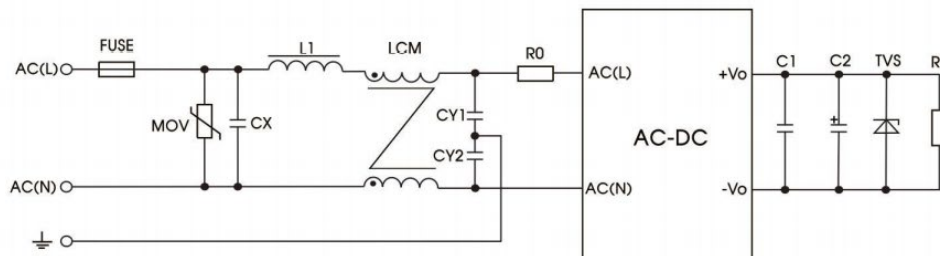

| Element Model | Component Values   |
|---------------|--|
| MOV           | S14K350  |
| CX            | 0.1 $\mu$ F/275VAC                                       |
| L1            | 4.7 $\mu$ H/2.0A   |
| LCM           | 2.2mH, we recommend using part no. FL2D-10-222 (MORNSUN) |
| CY1           | 1nF/400VAC   |
| CY2           | 1nF/400VAC   |
| FUSE          | 2A/250V slow-blow required                               |
| R0            | 33 $\Omega$ /3W  |

## Dimensions and Recommended Layout

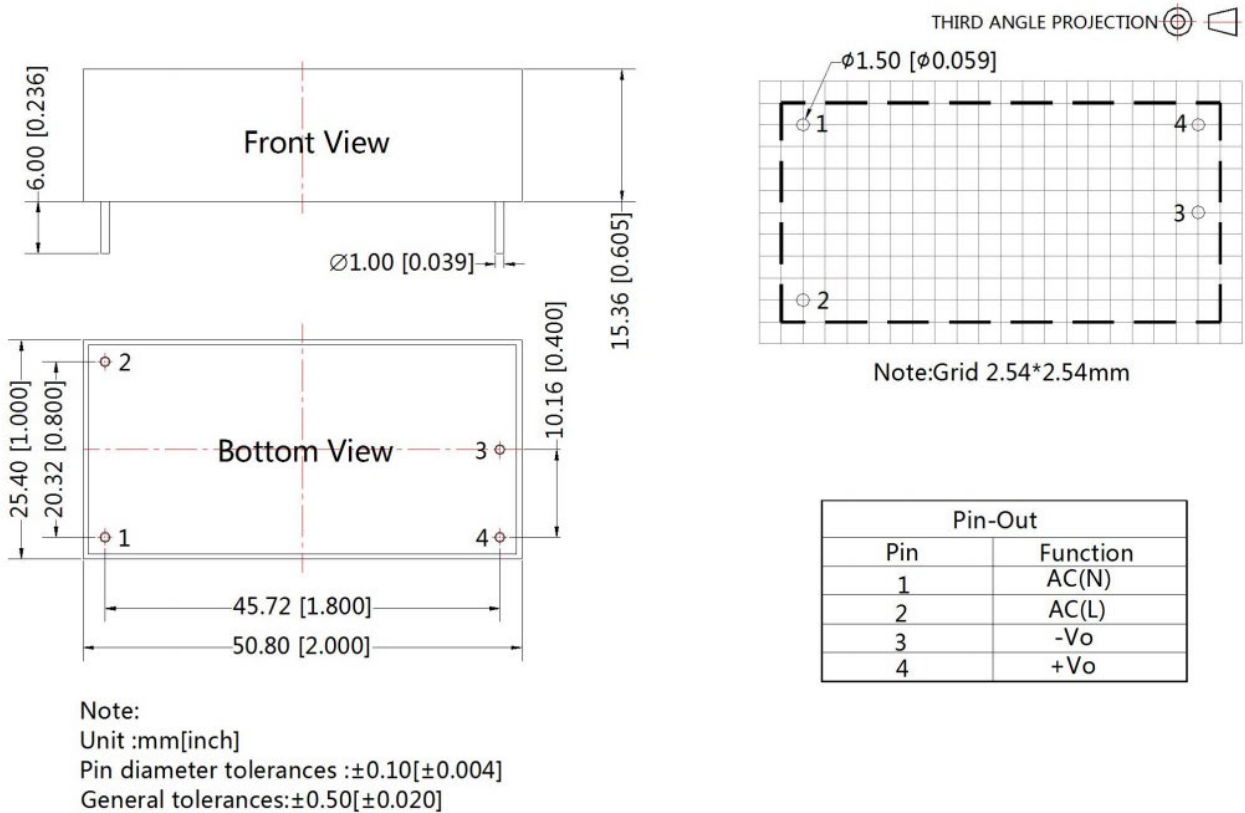

### Notes.

- For additional information on Product Packaging please refer to [www.idealpower.co.uk](http://www.idealpower.co.uk). Packaging bag number: 58220003(DIP package); 58220022 (A2S/A4S package);
- Unless otherwise specified, parameters in this datasheet were measured under the conditions of Ta=25°C, humidity <75% with nominal input voltage.
- All index testing methods in this datasheet are based on our company corporate standards.
- We can provide product customization service, please contact our technicians directly for specific information.
- Products are related to laws and regulations: see "Features" and "EMC".
- Our products shall be classified according to ISO14001 and related environmental laws and regulations and shall be handled by qualified units.