Features

- 30W rated power
- 85–305V AC / 100–430V DC input
- 4200V AC isolation
- Efficiency up to 90%
- Standby power 0.10–0.15W typ.
- -40°C to +85°C operating temperature
- EN 55032 Class B with no external components
- Optional chassis (CT) or DIN rail (CR) mounting
- OVP, OCP, SCP
- 3 years warranty

36PMR30H-xy(CT)(CR)

30W Encapsulated PCB Mount AC/DC Power Supply



Image for illustration purposes only.

Description

The 36PMR30H-xy is a 30W encapsulated PCB mount AC/DC power supply with a single regulated output. The potted construction protects the converter from dust and moisture, and it meets EN 55032 Class B emissions with no external components. The same module is also offered in a screw-terminal chassis for panel mounting (CT) or DIN rail mounting (CR).

Certified to UKCA, CE, cURus, FCC and CB on the standard PCB Mount and pending for the Chassis and DIN Rail Mounts, and built to UL/EN/IEC 62368-1, CSA C22.2 No. 62368-1, EN 60335-1, EN 61558-1 and EN 61558-2-16, with EMC to CISPR 32 and EN 55032. The unit meets RoHS and REACH requirements. These are primarily used in industrial and commercial applications, and customised solutions are available upon request.

Part Number Breakdown

36PMR30H	-xy	CT / CR
Series Name	Output Voltage	Chassis Option Blank: PCB Mount CT: Chassis Mount CR: DIN Rail Mount

Models

Part Number	Input Voltage (V AC / V DC)	Output Voltage (V DC)	Output Current (mA max.)	Efficiency (% typ.)	Capacitive Load (µF max.)
36PMR30H-033(CT)(CR)	85–305V AC 100–430V DC	3.3	6000	85.0	6600
36PMR30H-050(CT)(CR)		5.0	6000	86.0	6600
36PMR30H-090(CT)(CR)		9.0	3400	88.0	4400
36PMR30H-120(CT)(CR)		12.0	2500	90.0	4400
36PMR30H-150(CT)(CR)		15.0	2000	90.0	3300
36PMR30H-240(CT)(CR)		24.0	1300	88.0	1000
36PMR30H-480(CT)(CR)		48.0	625	90.0	470

Note: Only typical models are listed. Other models may be available upon request.

Input Specifications

Parameter	Specification						
Nominal Input Voltage	100–277V AC						
Input Frequency	47–63Hz						
Input Current	115V AC: 0.75A max. 230V AC: 0.50A max.						
Inrush Current	115V AC: 20A typ. cold start 230V AC: 50A typ. cold start						
Leakage Current	0.1mA RMS max. @ 277V AC, 50Hz						
No-load Power Consumption (W) (typ. / max.)	**3.3V:** 0.10 / 0.12	**5V:** 0.10 / 0.12	**9V:** 0.10 / 0.12	**12V:** 0.10 / 0.12	**15V:** 0.10 / 0.12	**24V:** 0.15 / 0.2	**48V:** 0.15 / 0.2
Built-In Fuse	2A, 300V, slow blow						

Output Specifications

Parameter	Specification						
Output Voltage Accuracy	**3.3V:** ±3%	**5V:** ±2%	**9V:** ±2%	**12V:** ±2%	**15V:** ±2%	**24V:** ±2%	**48V:** ±2%
Line Regulation	±0.5% typ. @ full load						
Load Regulation (typ.)	**3.3V:** ±2.0%	**5V:** ±1.5%	**9V:** ±1.0%	**12V:** ±1.0%	**15V:** ±1.0%	**24V:** ±1.0%	**48V:** ±1.0%
Ripple & Noise (mVp-p max.)	**3.3V:** 100	**5V:** 100	**9V:** 100	**12V:** 100	**15V:** 100	**24V:** 150	**48V:** 150
	Measured at 20MHz bandwidth using a 12" twisted pair wire terminated with a 0.1µF and 47µF parallel capacitor						
Temperature Coefficient	±0.02%/°C typ.						
Hold-Up Time	115V AC: 10mS typ. 230V AC: 50mS typ.			@ full load			
Minimum Load	No minimum load is required						
Efficiency Conditions	Efficiency in the Models table is tested at 230V AC. The CT and CR chassis options reduce efficiency by 2%.						

Protection

Parameter	Specification						
Overvoltage Protection (V DC max., Hiccup or Clamping by Zener Diode)	**3.3V:** 6.3	**5V:** 16	**9V:** 16	**12V:** 16	**15V:** 25	**24V:** 35	**48V:** 60
Overcurrent Protection	≥110% IOUT, automatic recovery						
Short Circuit Protection	Hiccup mode, automatic recovery						

Environmental Characteristics

Parameter	Specification
Operating Temperature	-40°C to +85°C (see derating curves)
Storage Temperature	-40°C to +105°C
Storage Humidity	10–95%RH
Maximum Case Temperature	+95°C max.
Operating Altitude	5000m max. (see derating curves)
Cooling Method	Natural convection
Vibration	10–55Hz, 5G, 30 minutes along X, Y and Z axes
Soldering Temperature (5S)	260°C typ.

Safety Standards

Parameter	Specification	
Certifications	All Variations: RoHS, REACH Standard PCB Mount only: UKCA, CE, cURus, FCC, CB (pending for Chassis and DIN Rail Mounts)	
Safety Standards	UL 62368-1, CSA C22.2 No. 62368-1, EN 62368-1, IEC 62368-1, EN 60335-1, EN 61558-1, EN 61558-2-16	
Overvoltage Category	OVC III	
Safety Class	Class II	
Isolation Voltage	Input to output: 4200V AC min.	Tested for 1 minute
Insulation Resistance	Input to output: 100MΩ min.	500V DC, 25°C, 70% RH

Electromagnetic Compatibility (EMC)

Parameter	Specification	
EMI Standards	CISPR 32, EN 55032 Class B with no external circuit	
ESD	IEC/EN 61000-4-2:	Contact ±6kV, air ±8kV, Criteria B
Radiated Immunity	IEC/EN 61000-4-3:	10V/m, Criteria A
EFT / Burst	IEC/EN 61000-4-4:	±2kV, Criteria B ±4kV, Criteria B (with EMC enhancement circuit 1 or 2)
Surge	IEC/EN 61000-4-5:	Line to line ±2kV, Criteria B Line to ground ±4kV, Criteria B (with EMC enhancement circuit 1 or 2)
Conducted Immunity	IEC/EN 61000-4-6:	10V RMS, Criteria A
Voltage Dips & Interruptions	IEC/EN 61000-4-11:	0%, 70%, Criteria B

Reliability

Parameter	Specification
MTBF	>1,500,000 hours @ 25°C (MIL-HDBK-217F)

General Specifications


Parameter	Specification	
Switching Frequency	65kHz typ.	
Case Material	Black plastic, UL94 V-0	
Input/Output Connection	**Default** PCB pins	**CT / CR** Screw terminal block


Weight & Dimensions


Parameter	Specification		
Dimensions (L x W x H) (excl. pins)	**Default** 69.5 x 39.0 x 24mm	**CT Suffix** 96 x 54 x 32.5mm	**CR Suffix** 96 x 54 x 37.1mm
Weight	**Default** 100g typ.	**CT Suffix** 148g typ.	**CR Suffix** 190g typ.

Mechanical Drawing

Default Package (PCB Mount)

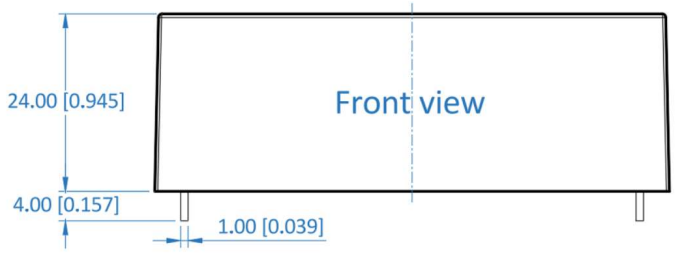

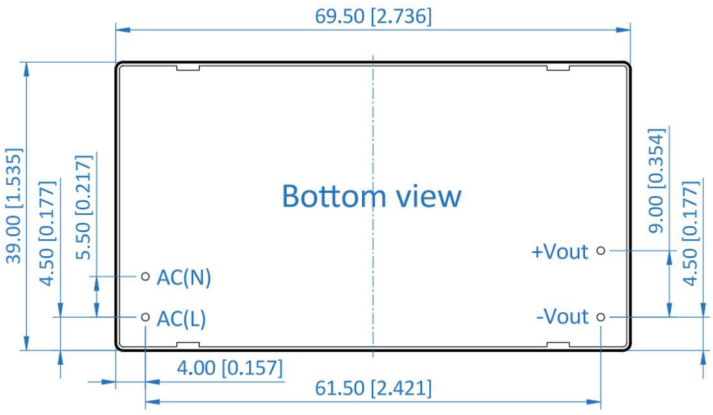


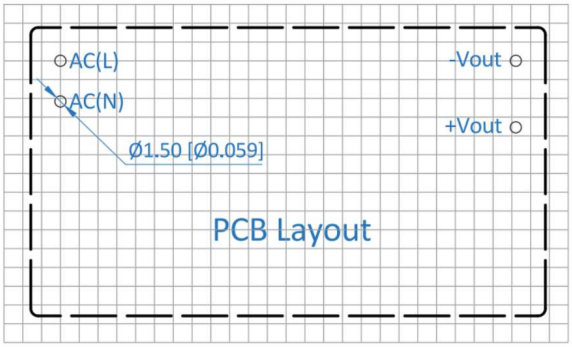

Pin	Single Output
1	AC (N)
2	AC (L)
3	-Vout
4	+Vout

Pin thickness tolerance: ±0.15mm [±0.006in].
Pin distance tolerance: ±0.50mm [±0.020in].
PCB layout footprint grid: 2.54 x 2.54mm.
Dimensions in millimetres [inches], tolerance of ±1.00mm [±0.040in].

CT Suffix: Chassis Mount

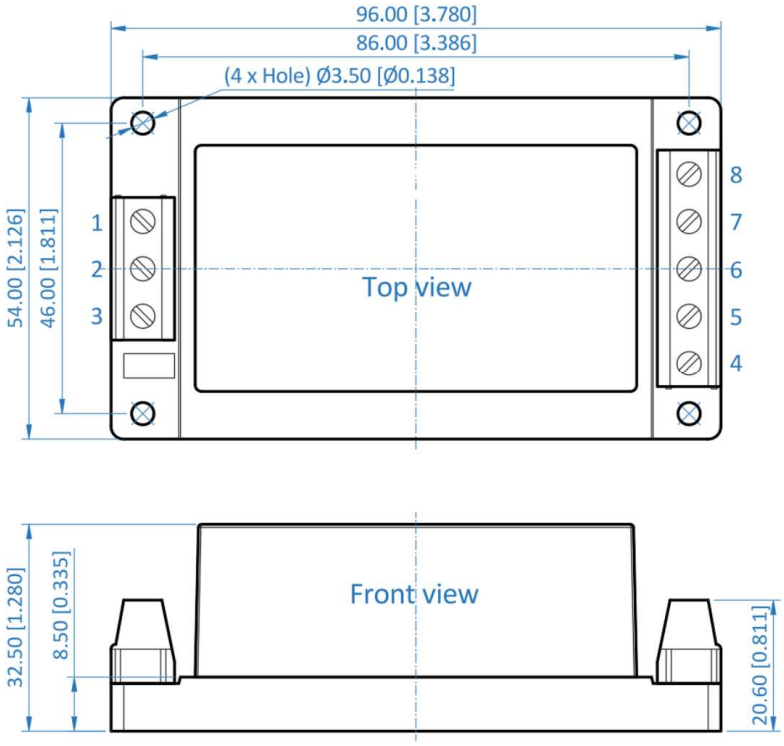


Pin	Single Output
2	AC (N)
3	AC (L)
4	+Vout
8	-Vout
1, 5, 6, 7	N/C

Tightening torque: 0.4Nm max.

Wire gauge to chassis: #12–24 AWG.

Dimensions in millimetres [inches], tolerance of ±1.00mm [±0.040in].

CR Suffix: DIN Rail Mount

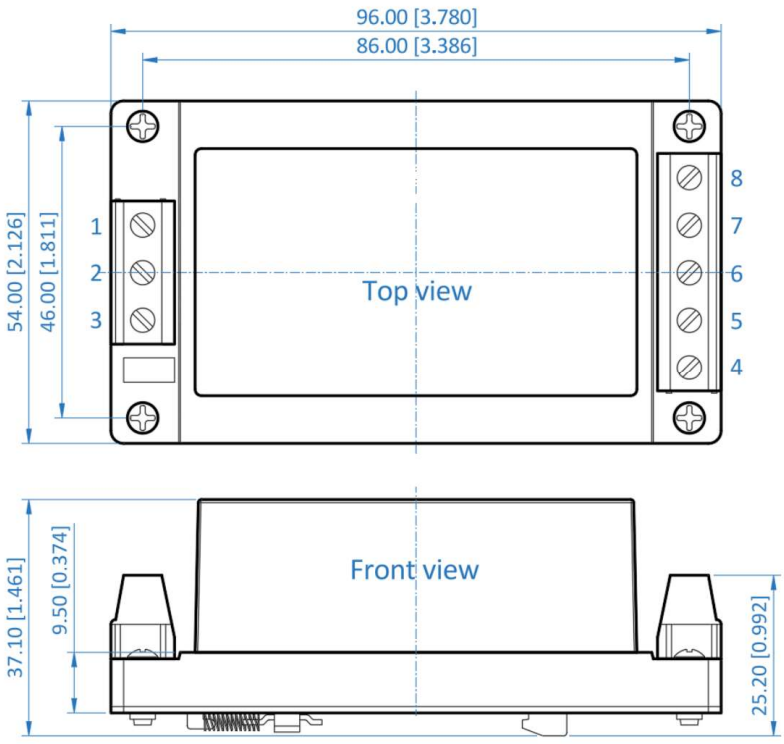

Pin	Single Output
2	AC (N)
3	AC (L)
4	+Vout
8	-Vout
1, 5, 6, 7	N/C


Tightening torque: 0.4Nm max.

Wire gauge to chassis: #12–24 AWG.

Dimensions in millimetres [inches], tolerance of ±1.00mm [±0.040in].


EMC Recommended Circuit

EMC Enhancement Circuit 1

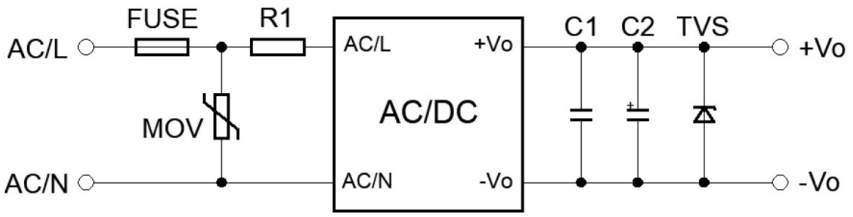

Not required for general use. Use where higher EFT and surge ratings are needed.

EMC Enhancement Circuit 2

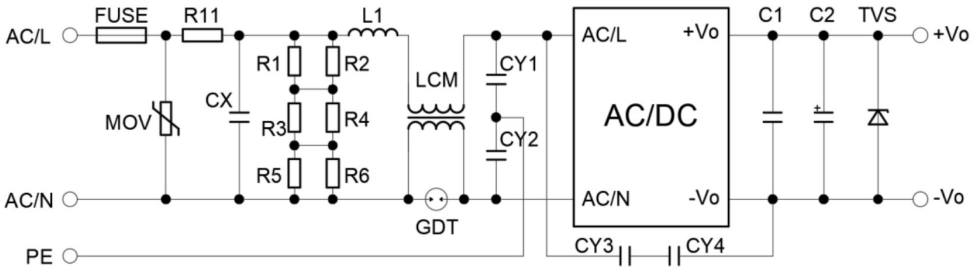

Not required for general use. Use where higher EFT and surge ratings are needed.

R11 is a wire-wound resistor and the fuse is required. R1 to R6 (1.5MΩ, 1206) are the bleeder resistors for CX. Other components as Recommended Components 1.

Recommended Components 1: EMC Enhancement Circuit 1

Vout	Fuse	MOV	R1	C1	C2	TVS
3.3V, 5V	3.15A, 300V	S14K350	3Ω, 3W	1μF, 50V	10μF, 50V	SMBJ7.0A
9V	3.15A, 300V	S14K350	3Ω, 3W	1μF, 50V	10μF, 50V	SMBJ12A
12V, 15V	3.15A, 300V	S14K350	3Ω, 3W	1μF, 50V	10μF, 50V	SMBJ20A
24V	3.15A, 300V	S14K350	3Ω, 3W	1μF, 50V	10μF, 50V	SMBJ30A
48V	3.15A, 300V	S14K350	3Ω, 3W	1μF, 100V	10μF, 63V	SMBJ64A


Recommended Components 2: EMC Enhancement Circuit 2

MOV	CX	R11	L1	LCM	GDT	CY1, CY2	CY3, CY4
S14K350	0.33μF, 305V AC	6.5Ω, 5W	1.2mH, 0.5A	20mH	300V, 1kA	2.2nF, 400V AC	1nF, 400V AC


Performance Graphs

Derating: Output vs Ambient Temperature


V_{OUT}=5V

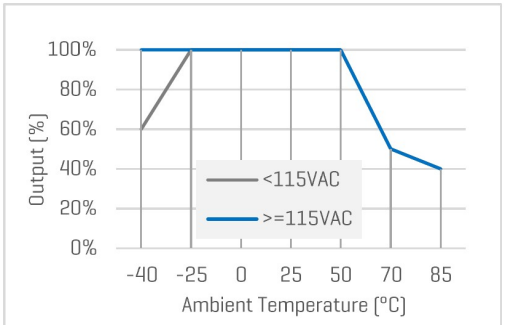


V_{OUT}=others

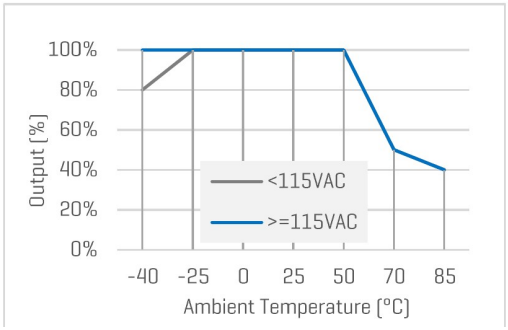



Output vs Input Voltage (Left) and Output vs Altitude (Right)

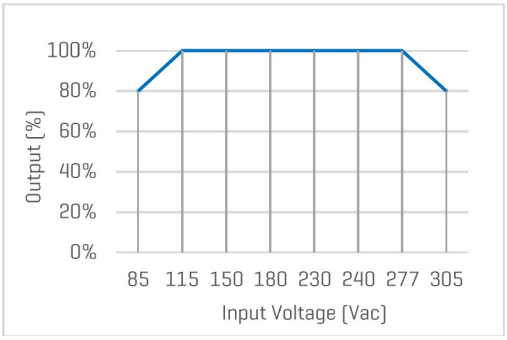

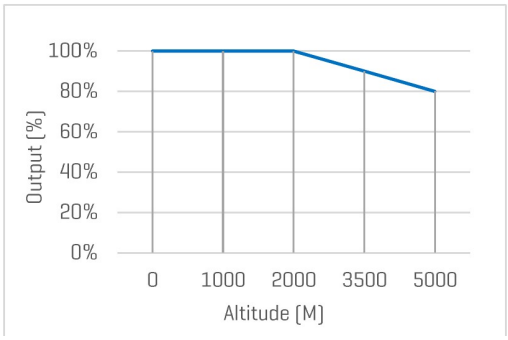

Efficiency vs Input Voltage (Left) and Efficiency vs Load (Right)

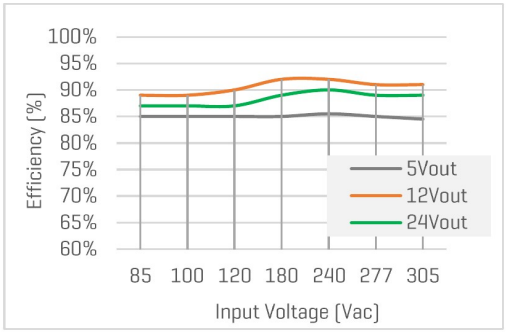

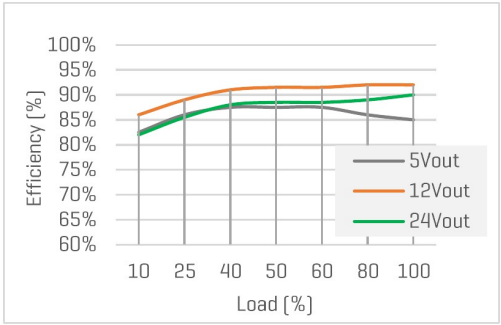

Packaging

Parameter	Specification	
Packing Method	Blister tray, packed in cartons	
Quantity per Blister Tray	**Default** 24 pcs	**CT Suffix** 15 pcs
Quantity per Carton	**Default** 144 pcs	**CT Suffix** 60 pcs
Carton Gross Weight	**Default** 16.6kg approx.	**CT Suffix** 9.9kg approx.
Carton Size	390 x 365 x 250mm	

Notes

1. Unless otherwise stated, specifications are measured at TA = 25°C, humidity <75%, nominal input voltage and rated output load.

2. xy is the output voltage code: 033 = 3.3V, 050 = 5V, 090 = 9V, 120 = 12V, 150 = 15V, 240 = 24V, 480 = 48V. Add CT or CR after the code for the chassis options, for example 36PMR30H-240CR.