

## Features

- Ultra-compact DIP/SMD package
- Wide 2:1 input voltage range
- Operating ambient temperature range: -40°C to +85°C
- I/O isolation test voltage: 1.5K VDC
- Short circuit protection (continuous)
- Industry standard pin-out
- EN62368 approved
- Meets UL62368 standards



Ideal Power's 36WRA-SD-1WR2 1W Isolated DC/DC Converter in SMD Series are certified to cRUUs, CE, RoHS & IEC/UL60950/EN62368 Standards and comply with the relevant Efficiency Regulations. These are primarily used in ITE, Audio & Video Industries and customised solutions are available upon request.

## Models

Model No.	Input Voltage (VDC)		Output		Ripple & Noise ② (mVp-p) Typ/Max	Full Load Efficiency (%) Min/Typ.	Capacitive Load (µF) Max.
	Nominal (Range)	Max. ①	Voltage (VDC)	Current (mA) Max/Min.			
36WRA1205SD-1WR2	12 (9-18)	20	±5	±100	100/150	75/77	1000
36WRA1209SD-1WR2			±9	±56		78/80	680
36WRA1212SD-1WR2			±12	±42		78/80	470
36WRA1215SD-1WR2			±15	±33		75/77	330
36WRA2405SD-1WR2	24 (18-36)	40	±5	±100	70/100	75/77	1000
36WRA2409SD-1WR2			±9	±56		75/77	680
36WRA2412SD-1WR2			±12	±42		75/77	470
36WRA2415SD-1WR2			±15	±33		75/77	330

Notes:

- ① Exceeding the maximum input voltage may cause permanent damage.
- ② Efficiency is measured at nominal input voltage and rated output load.

**Input Specifications**

	Conditions	Min	Typ	Max	Unit
Input Current (full load / no-load)	12VDC input voltage	--	108/15	112/30	mA
	24VDC input voltage	--	54/6	56/12	
Reflected Ripple Current	12VDC input voltage	--	40	--	
	24VDC input voltage	--	55	--	
Surge Voltage (1sec. max.)	12VDC input voltage	-0.7	--	25	VDC
	24VDC input voltage	-0.7	--	50	
Start-up Voltage	12VDC input voltage	--	--	9	
	24VDC input voltage	--	--	18	
Input Filter	12VDC input voltage	Capacitance filter			
Hot Plug		Unavailable			

**Output Specifications**

Parameter	Conditions	Min	Typ	Max	Unit	
Voltage Accuracy	5%-100% load, input voltage range	Vo1	--	±1	±3	
		Vo2	--	±3	±5	
No-load Output Voltage Accuracy	Input voltage range	Vo1	--	±2	±5	%
		Vo2	--	--	±8	
Linear Regulation	Input voltage variation from low to high, 5%-100% load	Vo1	--	±0.2	±0.5	
		Vo2	--	±0.5	±1	
Load Regulation	5%-100% load	Vo1	--	±0.5	±1	%
		Vo2	--	--	±2	
Transient Recovery Time	25% load step change	--	1	3	ms	
Transient Response Deviation		--	±3	±5	%	
Temperature Coefficient	Full load	--	--	±0.03	%/°C	
Short-circuit Protection		Continuous, self-recovery				

**General Specifications**


Parameter	Conditions	Min	Typ	Max	Unit
Isolation	Input-output Electric Strength Test for 1 minute with a leakage current of 1mA max.	1500	--	--	VDC
Insulation Resistance	Input-output resistance at 500VDC	1000	--	--	MΩ
Isolation Capacitance	Input-output capacitance at 100kHz/0.1V	--	100	--	pF
Operating Temperature	see Fig. 1	-40	--	+85	°C
Storage Temperature		-55	--	+125	
Pin Soldering Resistance Temperature	Soldering spot is 1.5mm away from case for 10	--	--	+300	
Reflow Soldering Temperature		Peak temperature ≤245°C, duration ≤60s max.			
Storage Humidity	Non-condensing	5	--	95	%RH
Switching Frequency (PFM Mode)	Full load, nominal input voltage	--	300	--	KHz
MTBF	MIL-HDBK-217F@25°C	1000	--	--	K hours

**Mechanical Specifications**


Case material	Black plastic; flame-retardant and heat-resistant
Dimensions	15.00 × 14.00 × 9.10 mm
Weight	2.2g(Typ.)
Cooling method	Free air convection

**Electromagnetic Compatibility (EMC)**


Emissions	CE	CISPR32/EN55032	CLASS B (see Fig. 3-② for recommended circuit)	
	RE	CISPR32/EN55032	CLASS B (see Fig. 3-② for recommended circuit)	
Immunity	ESD	IEC/EN61000-4-2	Contact ±6KV	perf. Criteria B
	RS	IEC/EN61000-4-3	10V/m	perf. Criteria A
	EFT	IEC/EN61000-4-4	±2KV (see Fig. 3-① for recommended circuit)	perf. Criteria B
	Surge	IEC/EN61000-4-5	line to line ±2KV (see Fig. 3-① for recommended circuit)	perf. Criteria B
	CS	IEC/EN61000-4-6	3 Vr.m.s	perf. Criteria A

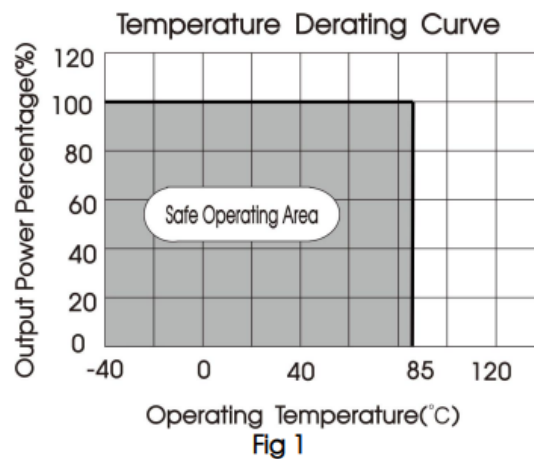**Characteristic Curve**


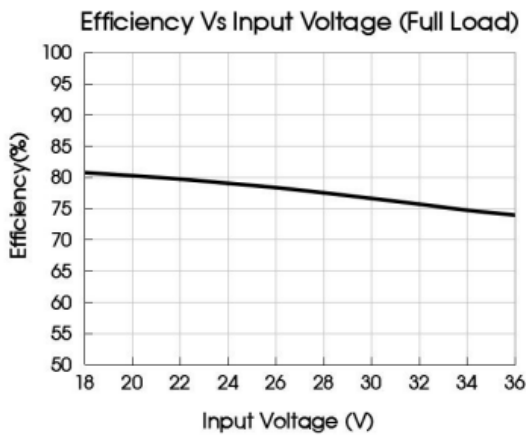
**Characteristic Curve (Continued)**

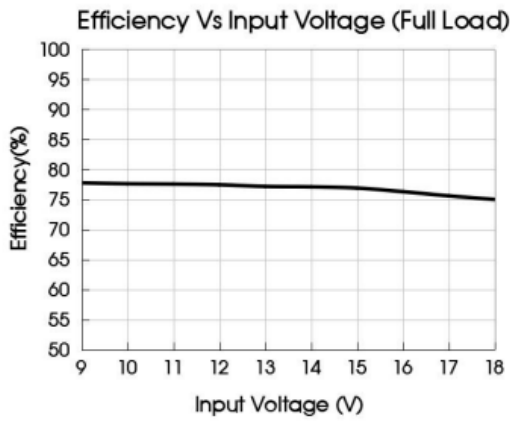


36WRA1205  
SD-1WR2

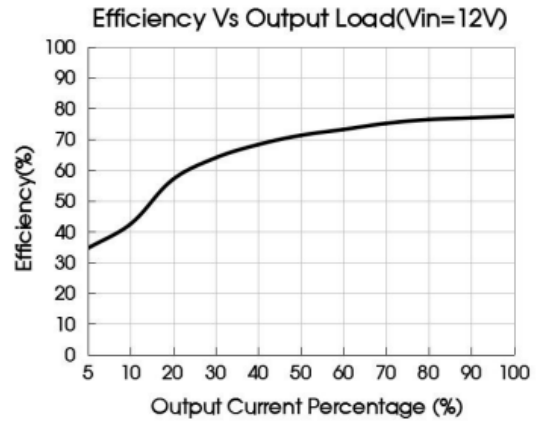

36WRA1205  
SD-1WR2



36WRA2415  
SD-1WR2

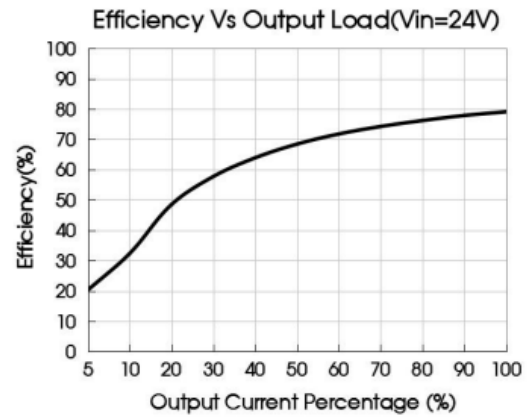


36WRA2415  
SD-1WR2

**Design Reference (Figure 1)**
**1 Typical application**


All the DC/DC converters of this series are tested before delivery using the recommended circuit shown in Fig. 2.

Input and/or output ripple can be further reduced by appropriately increasing the input & output capacitor values  $C_{in}$  and  $C_{out}$  and/or by selecting capacitors with a low ESR (equivalent series resistance). Also make sure that the capacitance is not exceeding the specified max. capacitive load value of the product.

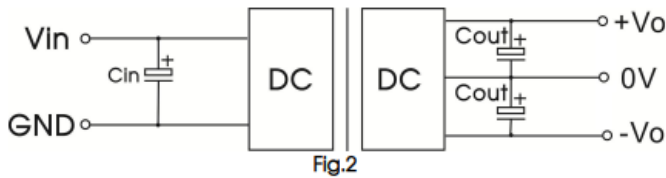

$V_{in}(VDC)$	12	24
$C_{in}$	47 $\mu$ F/25V	47 $\mu$ F/50V

$V_o(VDC)$	$\pm 5, \pm 9$	$\pm 12, \pm 15$
$C_{out}$	100 $\mu$ F/16V	27 $\mu$ F/25V

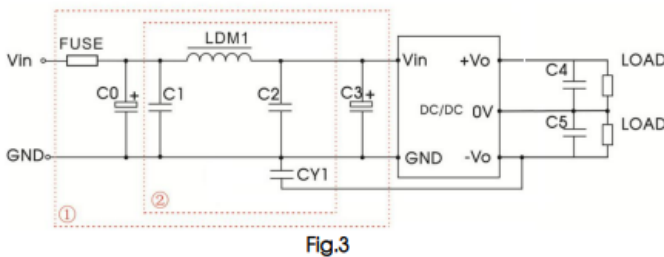**2. EMC compliance circuit**


Parameter description:

Part No.	$V_{in}: 12VDC$	$V_{in}: 24VDC$
FUSE	slow blow, choose according to actual input current	
C0	1000 $\mu$ F/25V	680 $\mu$ F/50V
C1	4.7 $\mu$ F/50V	
LDM1	15 $\mu$ H	
C2	4.7 $\mu$ F/50V	
C3	330 $\mu$ F/50V	
CY1	1nF/2KV	
C4, C5	Refer to the Cout Fig.2	


Notes: For EMC tests we use Part ① in Fig. 3 for immunity and part ② for emissions test. Selecting based on needs.

Notes: For EMC tests we use Part ① in Fig. 3 for immunity and part ② for emissions test. Selecting based on needs.

**Input current**


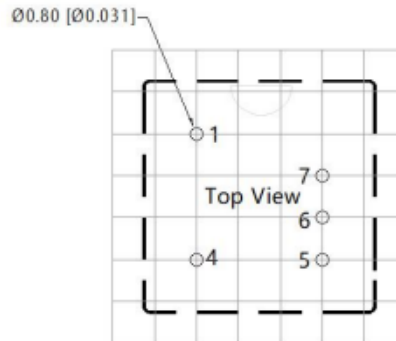
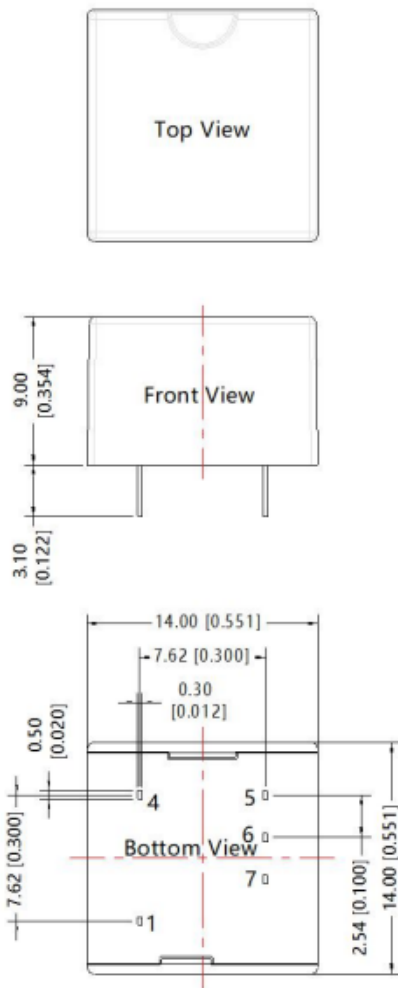
When the electricity is provided by the unstable power supply, please make sure that the range of the output voltage fluctuation and the ripple voltage of the power supply do not exceed the indicators of the modules. Input current of power supply should afford the flash startup current of this kind of DC/DC module (see Fig. 4).

Generally:  $V_{in}=12V$  series  $I_{ave} = 205mA$   $V_{in}=24V$  series  $I_{ave} = 104mA$


**Output load requirements**

When using, the minimum load of the module output should not be less than 5% of the nominal load. To meet the performance parameters of this datasheet, please connect a 5% dummy load in parallel at the output end, the dummy load is generally a resistor, please note that the resistor needs to be used in derating.

**Dimensions and Recommended Layout**

 THIRD ANGLE PROJECTION 


Note: Grid 2.54\*2.54mm

Pin-Out	
Pin	Function
1	GND
4	Vin
5	+Vo
6	0V
7	-Vo

Note:  
 Unit: mm[inch]  
 Pin diameter tolerances:  $\pm 0.10[\pm 0.004]$   
 General tolerances:  $\pm 0.50[\pm 0.020]$

**Notes:**

For additional information on Product Packaging please refer to [www.idealpower.com](http://www.idealpower.com).

Recommend using module with more than 5% load, if not, the ripple of the product may exceed the specification, but does not affect the reliability of the product.

The maximum capacitive load offered were tested at input voltage range and full load.

Unless otherwise specified, parameters in this datasheet were measured under the conditions of  $T_a=25^\circ\text{C}$ , humidity<75%RH with nominal input voltage and rated output load.

All index testing methods in this datasheet are based on company corporate standards.

We can provide product customization service, please contact our technicians directly for specific information.

Products are related to laws and regulations: see "Features" and "EMC".

Our products shall be classified according to ISO14001 and related environmental laws and regulations and shall be handled by qualified units.