

Features

- 2:1 Wide input 4.5~75V DC
- Isolation Voltage: 1600V DC
- Operating Temperature Range: -40~100°C
- Approved to cURus, UKCA, CE, RoHS, REACH
- Safety standards to IEC/EN/UL 62368-1
- Efficiency up to 86%
- EMC Class A & B Certified



Ideal Power's 43EDL03-xyW 2W DC/DC PCB Mount Power Supply Series are certified to UKCA, CE, RoHS, REACH & EN 62368-1/IEC 62368-1/UL 62368-1 Standards and comply with the relevant Efficiency Regulations. These are primarily used in ITE, Audio & Video Industries and customised solutions are available upon request.

Part Number Structure



43EDL03	-	48	S	05	W
Series Name		Input Voltage (VDC)	Output Quantity	Output Voltage (VDC)	Input Range
		12: 4.5~18 24: 18~36 48: 36~75	S: Single D: Dual	3P3: 3.3 05: 5 09: 9 12: 12 15: 15 24: 24 05: +5 12: +12 15: +15	4 : 1

Models

Model Number	Input Range V DC	Output Voltage V DC	Output current @Full Load mA	Input Current @ No Load A	Efficiency %	Maximum Capacitor Load µF
43EDL03-12S3P3W	4.5 ~ 18	3.3	700	35	75	4400
43EDL03-12S05W	4.5 ~ 18	5	600	40	79	2200
43EDL03-12S09W	4.5 ~ 18	9	333	40	81	1300
43EDL03-12S12W	4.5 ~ 18	12	250	40	82	1000
43EDL03-12S15W	4.5 ~ 18	15	200	40	83	820
43EDL03-12S24W	4.5 ~ 18	24	125	40	82	470
43EDL03-12D05W	4.5 ~ 18	±5	±300	40	80	±1200
43EDL03-12D12W	4.5 ~ 18	±12	±125	40	82	±520
43EDL03-12D15W	4.5 ~ 18	±15	±100	50	81	±440
43EDL03-24S3P3W	9 ~ 36	3.3	700	20	76	4400
43EDL03-24S05W	9 ~ 36	5	600	20	80	2200
43EDL03-24S09W	9 ~ 36	9	333	20	81	1300
43EDL03-24S12W	9 ~ 36	12	250	25	83	1000
43EDL03-24S15W	9 ~ 36	15	200	25	83	820
43EDL03-24S24W	9 ~ 36	24	125	25	81	470
43EDL03-24D05W	9 ~ 36	±5	±300	20	79	±1200
43EDL03-24D12W	9 ~ 36	±12	±125	25	81	±520
43EDL03-24D15W	9 ~ 36	±15	±100	25	81	±440
43EDL03-48S3P3W	18 ~ 75	3.3	700	13	74	4400
43EDL03-48S05W	18 ~ 75	5	600	13	80	2200
43EDL03-48S09W	18 ~ 75	9	333	13	81	1300
43EDL03-48S12W	18 ~ 75	12	250	13	82	1000
43EDL03-48S15W	18 ~ 75	15	200	13	83	820
43EDL03-48S24W	18 ~ 75	24	125	13	82	470
43EDL03-48D05W	18 ~ 75	±5	±300	13	80	±1200
43EDL03-48D12W	18 ~ 75	±12	±125	13	82	±520
43EDL03-48D15W	18 ~ 75	±15	±100	13	82	±440

DC – DC

Input Specifications

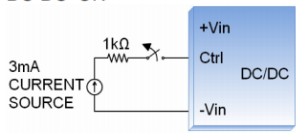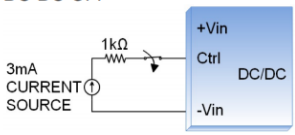Parameter	Conditions	Min	Typ	Max	Unit	
Operating input voltage range	12Vin(nom)	4.5	12	18	V DC	
	24Vin(nom)	9	24	36		
	48Vin(nom)	18	48	75		
Start-up voltage	12Vin(nom)	--	--	4.5	V DC	
	24Vin(nom)	--	--	9		
	48Vin(nom)	--	--	18		
Shutdown voltage	12Vin(nom)	2	3	4	V DC	
	24Vin(nom)	6	7	8		
	48Vin(nom)	13	15	17		
Start-up time	Constant resistive load	Power up	--	10	20	ms
		Remote ON/OFF	--	10	20	
Input surge voltage	100 Second, max.	12Vin(nom)	--	--	25	V DC
		24Vin(nom)	--	--	50	
		48Vin(nom)	-	--	100	
Input filter				Capacitor Type		
Remote ON/OFF	Ctrl pin applied current via 1kΩ	DC_DC ON		Open or high impedance		
		DC_DC OFF	2	3	4	mA
Application circuit			--	2.5	--	
DC-DC ON						
DC-DC OFF						

Output Specifications

Parameter	Conditions	Min	Typ	Max	Unit	
Voltage accuracy		-1.0	--	+1.0		
Line regulation	Low Line to High Line at Full Load	-0.2	--	+0.2		
Load regulation	No Load to Full Load	Single	-1.0	--	+1.0	%
		Dual	-1.0	--	+1.0	
	5% Load to 100% Full Load	Single	-0.5	--	+0.5	
	Dual	-0.8	--	+0.8		
Cross regulation	Asymmetrical load 25%/100% FL	-5.0	--	+5.0		
Ripple and Noise	20MHz bandwidth	--	75	--	mVp-p	
Temperature coefficient		-0.02	--	+0.02	%/°C	
Transient response recovery time	25% Load step change	--	500	--	µs	
Over current protection		130	170	230	%	
Short circuit protection		Continuous, automatic recovery				

General Specifications

Parameter	Conditions		Min	Typ	Max	Unit
Isolation voltage	1 minute	Input to Output	1600	--	--	V DC
Isolation resistance	500V DC		1	--	--	GΩ
Isolation capacitance			--	--	50	pF
Switching frequency	Full load to minimum load		100	--	--	kHz
Safety approvals						IEC/ EN/ UL62368-1
Case material						Non-conductive black plastic
Potting material						Silicone (UL94 V-0)
Weight						4.5g (0.16oz)
MTBF	MIL-HDBK-217F, Full load					5.124 x 10 ⁶ hrs

Environmental Specifications


Parameter	Conditions		Min	Typ	Max	Unit
Operating ambient temperature	With derating		-40	--	+105	
Maximin case temperature			--	--	105	°C
Storage temperature range			-55	--	+125	
Thermal Shock						MIL-STD-810F
Vibration						MIL-STD-810F
Relative humidity						5% to 95% RH

EMC Specifications


Parameter	Conditions		Level
EMI	EN55032	With external components	Class A, Class B
EMS	EN55024		
ESD	EN61000-4-2	Air ± 8kV and Contact ± 6kV	Perf. Criteria A
Radiated immunity	EN61000-4-3	10 V/m	Perf. Criteria A
Fast transient	EN61000-4-4	± 2kV With an external input filter capacitor (Nippon chemi-con KY series, 220µF/100V)	Perf. Criteria A
Surge	EN61000-4-5	± 1kV With an external input filter capacitor (Nippon chemi-con KY series, 220µF/100V)	Perf. Criteria A
Conducted immunity	EN61000-4-6	10 Vr.m.s	Perf. Criteria A
Power frequency magnetic field	EN61000-4-8	100A/m continuous; 1000A/m 1 second	Perf. Criteria A

CAUTION: This power module is not internally fused. An input line fuse must always be used.


Characteristic Curve

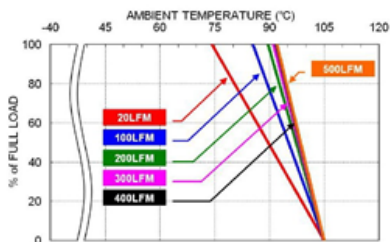

43EDL03-24S05W Derating Curve

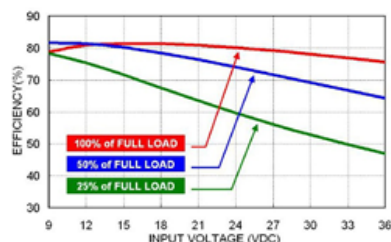

43EDL03-24S05W Efficiency vs. Input Voltage

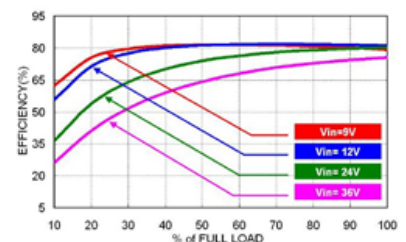

43EDL03-24S05W Efficiency vs. Output Load


Fuse Considerations

This power module is not internally fused. An input line fuse must always be used. This encapsulated power module can be used in a wide variety of applications, ranging from simple stand-alone operation to an integrated part of sophisticated power architecture. To maximum flexibility, internal fusing is not included; however, to achieve maximum safety and system protection, always use an input line fuse. The input line fuse suggest as below :

Model	Fuse Rating (A)	Fuse Type
43EDL03-12S□□W, 43EDL03-12D□□W	1.6	Slow-Blow
43EDL03-24S□□W, 43EDL03-24D□□W	0.8	Slow-Blow
43EDL03-48S□□W, 43EDL03-48D□□W	0.5	Slow-Blow

The table based on the information provided in this data sheet on inrush energy and maximum DC input current at low Vin.

Mechanical Drawing

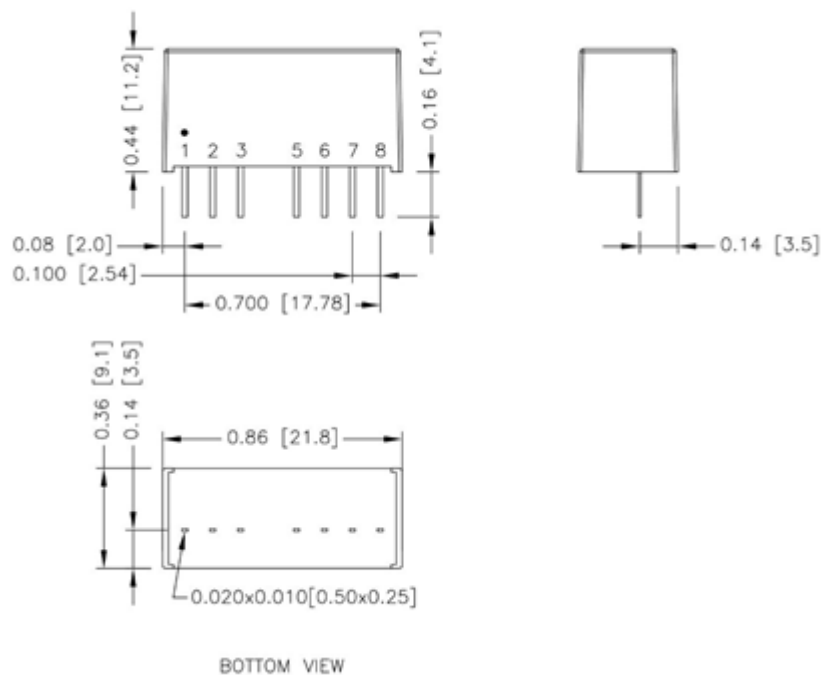


- All dimensions in inch [mm]
- Tolerance: x.xx±0.02 [x.x±0.5]
x.xxx±0.01 [x.xx±0.25]
- Pin dimension tolerance ±0.004 [0.10]

Pin Connection

Pin	Single	Dual
1	-Vin	-Vin
2	+Vin	+Vin
3	Ctrl	Ctrl
5	NC	NC
6	+Vout	+Vout
7	-Vout	Common
8	NC	-Vout

Recommended Pad Layout

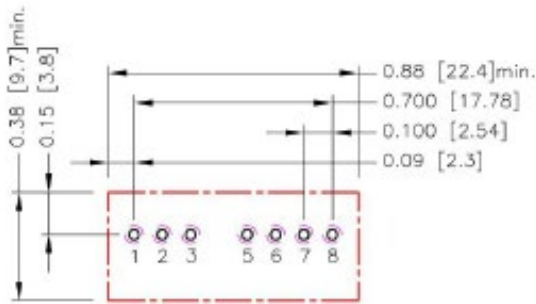


All dimensions in inch[mm]
 Pad size (lead free recommended)
 Through hole 1.2.3.6.7.8: $\Phi 0.031[0.80]$
 Top view pad 1.2.3.6.7.8: $\Phi 0.039[1.00]$
 Bottom view pad 1.2.3.6.7.8: $\Phi 0.063[1.60]$

Thermal Considerations

The power module operates in a variety of thermal environments. However, sufficient cooling should be provided to help ensure reliable operation of the unit. Heat is removed by conduction, convection, and radiation to the surrounding Environment. Proper cooling can be verified by measuring the point as the figure below. The temperature at this location should not exceed "Maximum case temperature". When operating, adequate cooling must be provided to maintain the test point temperature at or below "Maximum case temperature". You can limit this Temperature to a lower value for extremely high reliability.

- Thermal test condition with vertical direction by natural convection (20LFM).



TOP VIEW