

Features

- Universal Input 100~240V AC
- Approved to UKCA, CE, CB, TUV, CCC, cULus, FCC, RoHS
- EN 62368-1 Safety Approved
- Meets Efficiency Level VI
- Single Output 12V DC
- OVP, OCP



Image for Illustration Purpose
Models may vary

Ideal Power's 5210952C-12-RS 84W AC/DC External Desktop Power Supply (PSU) Series are certified to UKCA, CE, CB, TUV, CCC, cULus, FCC, RoHS & EN 62368-1 Standards and comply with (EU) 2019/1782, Level VI Efficiency Regulations. These are primarily used in ITE, Audio & Video Industries and customised solutions are available upon request.

Models

Model Number	Output Voltage (V DC)	Output Current (A)	Output Power (W)	Efficiency (%)
5210952C-12-RS	12	7	84W	89%

Input Data

	Min	Typical	Max	Units	Notes
Input Voltage	90	--	264	V AC	100-240VAC +/- 10%
Input Frequency	47	--	63	Hz	60Hz/50Hz Nominal
Input Current	--	--	1.5 0.75	A	at 115V AC Input & Full load at 230 V AC Input & Full load
Inrush Current	--	--	60 120	A	at 110V AC At cold start, maximum load. at 220V AC At cold start, maximum load.
Leakage Current	--	--	0.25	mA	at 240V AC / 50Hz

Output Data

	Min	Typical	Max	Units	Notes
Current Range	0.0	--	7	A	
Voltage Range	11.40	--	12.60	V	
Ripple & Noise	--	--	240	mVpp	
Over Current Protection	110~150% of rated output current.				Will recover if fault condition is removed
Over Voltage Protection	150% Max. of the rated output voltage				Will recover if fault condition is removed

Environmental Data

	Min	Typical	Max	Units	Notes
Operating Temperature	0	--	+40	°C	
Storage Temperature	-20	--	+85	°C	
Operating Humidity	10	--	90	%	non condensing
Relative Humidity	5	--	90	%	non condensing

Other Information

	Notes
Dielectric Strength	Primary to Secondary: 4242V DC / 5mA Max / 60 second (3 seconds for mass production)
MTBF	30,000 hrs at 25°C
Weight	450g
Dimensions	133x59x34mm
Output Cord	16AWG UL2464 2C+Shielding, 1.2M Black
Output Connector	2.1mm x 5.5mm x 12.0mm .

Safety Approvals

	Safety Standards
Safety Standards	EN 62368-1
Approvals	UKCA, CE, CB, TUV, CCC, cULus, FCC, RoHS


EMI/EMS Standards

	Test Level	Test Criteria
EMI	EN 55032, CISPR 22	Class B
EMS	EN 55024	
ESD	IEC 61000-4-2, Air discharge +/-8KV, Contact discharge +/-4KV	Pass B
RS	IEC 61000-4-3 Frequency: 80~1000MHz Field Strength: 3V/M, 80% AM(1KHz)	
EFT	IEC 61000-4-4, AC-Input 1.0KV	Pass A/B
Surge Voltage	IEC 61000-4-5 Differential mode +/-1KV. Common mode +/-1KV	Pass A


Product Information

Measurements	133 x 59 x 34 mm
Enclosure	94V-0 minimum
Output Cable	UL1866 #14
Weight	450g

Mechanical Drawing

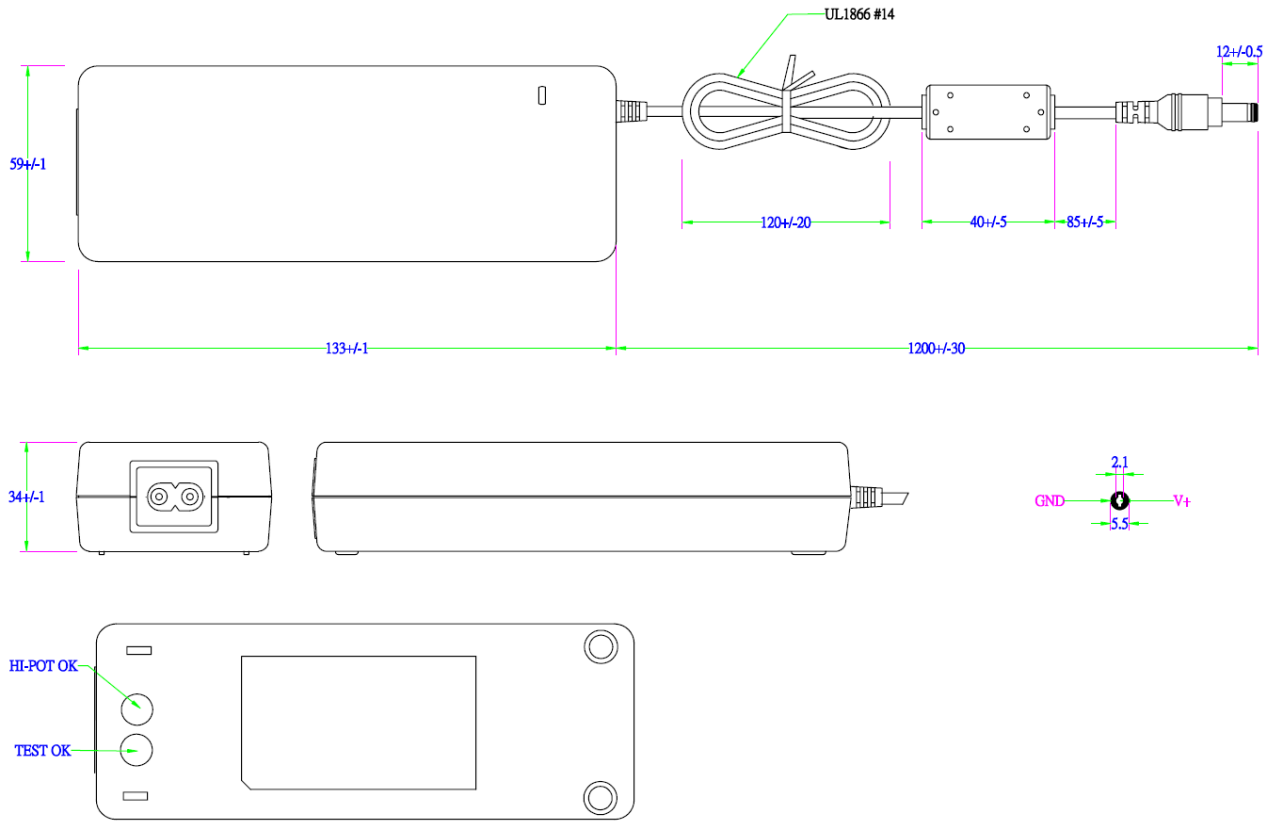

Typical Labels

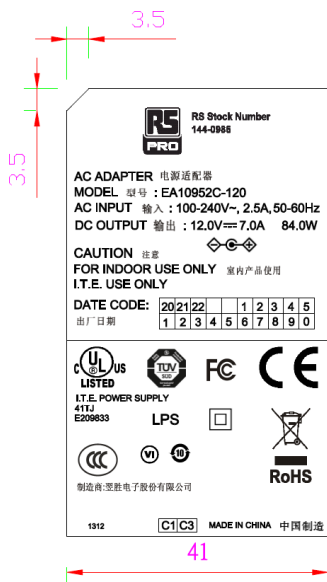

P/N.: 312
Background: Black color
Character: Silver color
Unit: mm