

## Features

- Input Voltage 85~305V AC
- Cooling by free air convection
- Efficiency up to 88%
- Protection: OLP, OVP, SCP
- 3 Years Warranty



## 56YEP150-x AC-DC PSU Series

150W Enclosed AC/DC Power Supply (PSU)



The 56YEP150-x Series is a versatile and reliable 150W Enclosed AC/DC Power Supply. Designed for use in applications such as automation and control within IT and AV systems. This series is supplied with a Screw Terminal Block input connection and supports input voltages of 85~305V AC 47~63Hz.

## Models

Model	Voltage (V) DC	Rated Current	Rated Power	% Efficiency	Voltage range	Ripple and Noise mVp-
56YEP150-05	5	30	150	87	4.75~5.5	150
56YEP150-7.5	7.5	20	150	87.5	7.13~8.25	150
56YEP150-12	12	12.5	150	88	11.4~13.2	150
56YEP150-13.5	13.5	11.2	151.2	89	12.8~14.9	150
56YEP150-15	15	10	150	88.5	14.3~16.5	150
56YEP150-24	24	6.3	151.2	88	22.8~26.4	150
56YEP150-27	27	5.6	151.2	88.5	25.7~29.7	150
56YEP150-36	36	4.2	151.2	87.5	34.2~39.6	180
56YEP150-48	48	3.2	153.6	88	45.6~52.8	240
56YEP150-60	60	2.56	153.6	87.5	56~66	300

### Input Specifications

Input Voltage	85~305VAC/127-370VDC	
Frequency Range	47-63Hz	
AC Current	1.9A/115VAC	1A/230VAC
Inrush Current	Cold Start 45A/200us at 230VAC	50Hz Cold Start 25A/200us at 115VAC 50Hz
Leakage Current	<2mA/240VAC	
Power Factor	>0.93/230VAC at full load	>0.98/115VAC at full load

### Output Specifications

Voltage Tolerance	±2.0%	5v
	±1.0%	Others
Line Regulation	±0.5%	
Load Regulation	±1.0%	5v
	±0.5%	Others
Set up Rise Time Hold up	0.6s,30ms,16ms/230VAC(at full load)	0.6s,30ms,16ms/115VAC(at full load)

### Protection

Over Load	105~135%Rated Output Power
	Hiccup mode, recovers automatically after fault condition is removed.
Over Voltage	115~135%Rated Output Voltage
	Shut down o/p voltage, re-power on to recover.
Short Circuit	Hiccup mode, recovers automatically after fault condition is removed
Over Temperature	Shut down o/p voltage, recovers automatically after temperature goes down.
Remote Control	CN1:<0~0.8VDC POWER ON , 4~10VDC POWER OFF

### Environmental Characteristics

Working Temp	-30~+70°C (Refer to "Derating Curve")
Working Humidity	20~95% RH non-condensing
Storage Temp., Humidity	-40~+85°C, 10~95% RH non-condensing
Temp. Coefficient	±0.03%/°C (0~50°C)
Vibration	Component: 10 ~ 500Hz, 5G 10min./1cycle, 60min. each along X, Y, Z axes
Over Voltage Category	OVC II / According to EN62368-1;altitude up to 2000 meters
MTBF	287.5Khrs min. MIL-HDBK-217F(25°C)
Safety Protection	Class I

### Safety & EMC

Safety Standards	BS/EN62368-1
Withstand Voltage	I/P-O/P:3KVAC/1min I/P-FG:2KVAC/1min O/P-FG:0.5KVAC/1min
Isolation Resistance	I/P-O/P:100M Ohms / 500VDC / 25°C/ 70% RH
EMC Emission	Compliance to BS EN/EN55032 (CISPR32) Class B, BS EN/EN61000-3-2 Class A-D,BS EN/EN61000-3-3
EMC Immunity	Compliance to BS EN/EN61000-4-11 Criteria B, BS EN/EN61000-4-2,3,4,5,6,8 Criteria A

### Notes:

1. All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature.
2. Ripple & noise are measured from peak to peak with band width limit of 20MHz (0.1uf and 47uf /50V parallel capacitor under DC output full load, AC nominal input 25 °C ambient temperature).
3. Derating may be needed under low input voltages. Please check the derating curve for more details.
4. The power supply is considered a component which will be installed into a final equipment. The final equipment must be re-confirmed that it still meets EMC directives. For guidance on how to perform these EMC tests, please refer to "EMI testing of component power supplies."
5. The ambient temperature derating of 5°C/1000m is needed for operating altitude greater than 2000m(6500ft).


### Dimensions & Weight

Size	199 x 99 x 30 mm
Weight	540g/pcs

### Packaging

Carton Size	38 x 20.5 x 23 cm
Master Carton Quantities	20pcs/carton

### Dimensions and Recommended Layout

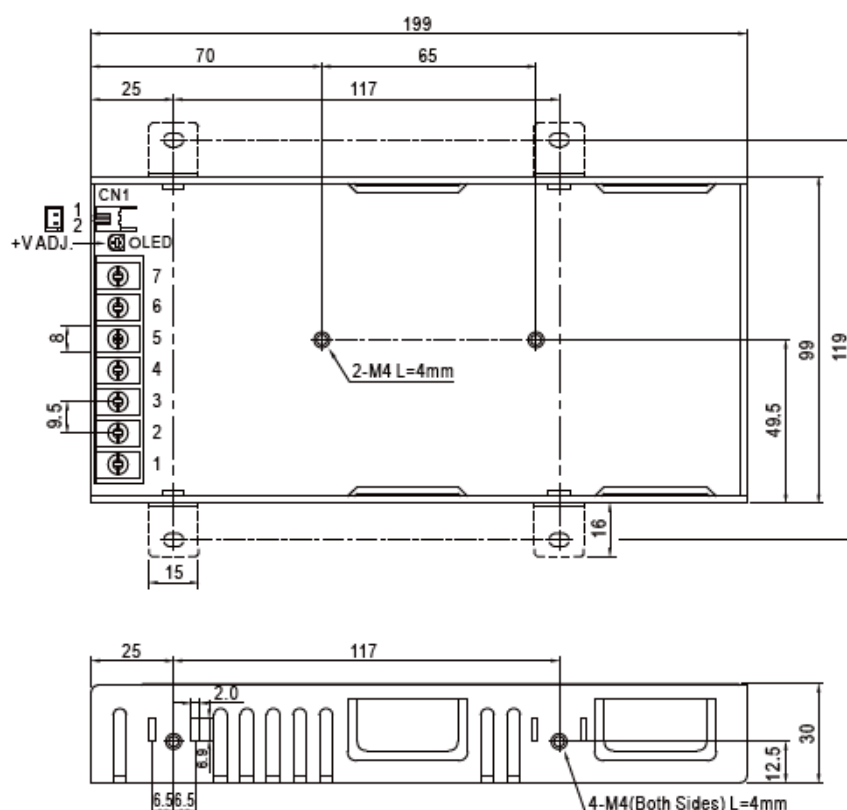


Output	
No.	Description
4,5	DC OUTPUT -V
6,7	DC OUTPUT +V

Input	
No.	Description
1	AC/L
2	AC/N
3	PE

Remote ON/OFF (CN1)	
No.	Description
1	RC+
2	RC-


Remote ON/OFF (CN1)	
Mating Housing	Terminal
1	RC+

## Block Diagram

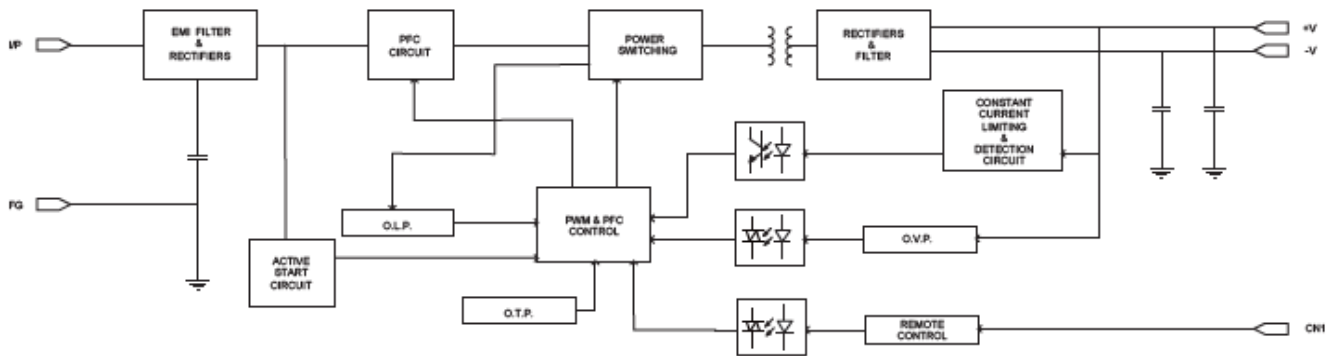

## Derating Curve

### Derating Curve

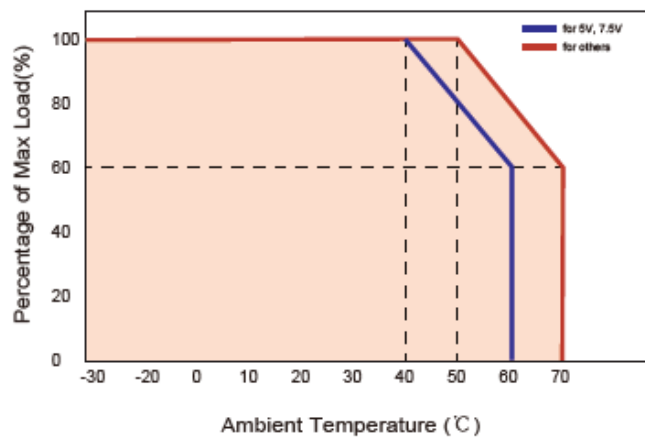

### Static Characteristics

