

Features

- Input Voltage Range
85-305VAC
- UL/EN/IEC 62368-1 Safety Approved
- Super Small Design
- Low no-load power consumption
- Up to 87% Efficiency
- Single Output 5-48V DC
- Protections: SCP, OLP, OVP
- Three Years Warranty



56YMC20-xx-RS Series

20W Encapsulated AC/DC Power Supply



The 56YMC20-xx-RS Series is a high-efficiency and standards-compliant 20W Encapsulated AC/DC PCB Mount Power Supply. Designed for use in applications such as industrial control and automation systems. This series is supplied with a Pin Connection input connection and supports input voltages of 85~305V AC 47~63Hz.

Model Number Information

56YMC	20	xx
Series Name	Rated Wattage	Output Voltage

Models

Model Number	DC Voltage (V)	Rated Current (A)	Rated Power (W)	Efficiency (%)	Max. Capacitive Load (uF)
56YMC20-5-RS	5	4	20	85.0	8000
56YMC20-12-RS	12	1.67	20.04	86.0	4000
56YMC20-15-RS	15	1.33	19.95	87.0	3000
56YMC20-24-RS	24	0.83	19.92	87.0	1000

Input Specifications

Input Voltage	85~305V AC/100~430V DC
Frequency Range	47-63Hz
AC Current	0.50A at 115VAC / 0.30A at 230VAC
Inrush Current	Cold Start 45A at 115V AC / 45A at 230V AC
Leakage Current	< 0.1mA/277V AC, 50Hz

Output Specifications

Ripple & Noise	150mVp-p	All Models
Voltage Tolerance	±1.5%	All Models
Line Regulation	±0.5%	All Models
Load Regulation	±1.0%	All Models
No Load Power Consumption	0.1W/230VAC 0.12W/230VAC	3.3v, 5v, 9v, 12v, 15v 24v
Set up	1500ms, 40ms at 230VAC at full load	
Rise Time	1500ms, 40ms at 115VAC at full load	
Hold up Time	50ms at 230VAC at full load / 8ms at 115VAC at full load	

Protection

Over Current	≥110% Rated Output current, recovers automatically after current goes down.	
Short Circuit	Hiccup mode allows long short circuit mode and re-powers on to recover.	
	≤7.5V DC	5v
	≤20V DC	12v
	≤20V DC	15v
	≤30V DC	24v
	Output voltage clamp or Hiccup mode	

Environmental Characteristics

Working Temp	-40 °C to +80 °C (Refer to "Derating Curve")
Working Humidity	20~95% RH non-condensing
Storage Temp., Humidity	- 40°C~+85°C, 10 ~ 95% RH non-condensing
Temp. Coefficient	± 0.02%/°C(0~50°C)
MTBF	1500K hrs min. MIL-HDBK-217F (25°C)
	>130Kh/220V AC,25°C at full load
Projected Lifetime	>20Kh/220V AC,55°C at full load
	>27Kh/220V AC,55°C at 80%load
Altitude Application	5000m
Cooling Method	Natural Air Cooling

Safety & EMC

Safety Standards	IEC/EN/BS EN 62368-1, EN61558-1, EN60335-1
Withstand Voltage	I/P-O/P:3.00KV AC
Isolation Resistance	I/P-O/P, I/P-FG, O/P-FG:100M Ohms/ 500V DC/25 °C/70% RH
EMC Emission	EN55032(CISPR32) Class B,EN55014-1

Notes:



1. All parameters without special description are measured under the conditions of input 230VAC, rated load, ambient temperature 25 °C, and ambient humidity less than 75%.
2. Ripple & noise are measured from peak to peak with a bandwidth limit of 20MHz(0.1uf and 47uf /50V parallel capacitor under DC output full load, AC nominal input 25 °C ambient temperature).
3. Tolerance: includes set up tolerance, line and load regulation.
4. Derating may be needed under low input voltages. Please check the derating curve for more details.
5. The power supply is considered a component which will be installed into the final equipment. The final equipment must be confirmed to meet EMC directives. For guidance on performing these EMC tests, please refer to "EMI testing of component power supplies."
6. The ambient temperature derating of 3.5°C/1000m is needed for operating altitude greater than 2000m(6500ft).

Dimensions & Weight


	Measurements	Weight
56YMC20-xy-RS	52.4 x 27.2 x 24.0mm/2.07 x 1.07 x 0.94in	55g

Packaging


Carton Size	28 x 15 x 24cm / 11 x 5.9 x 9.44 in
Master Carton Quantities	600pcs/Carton

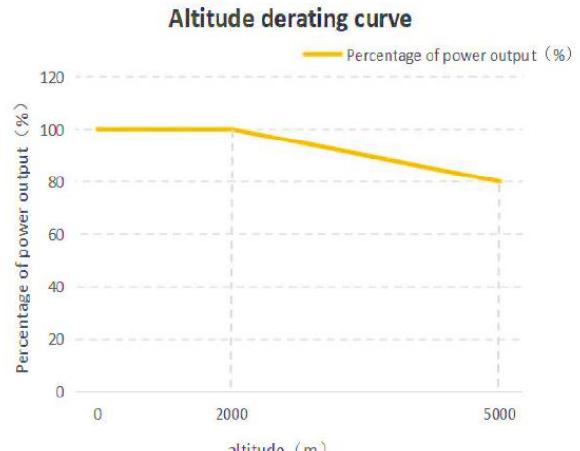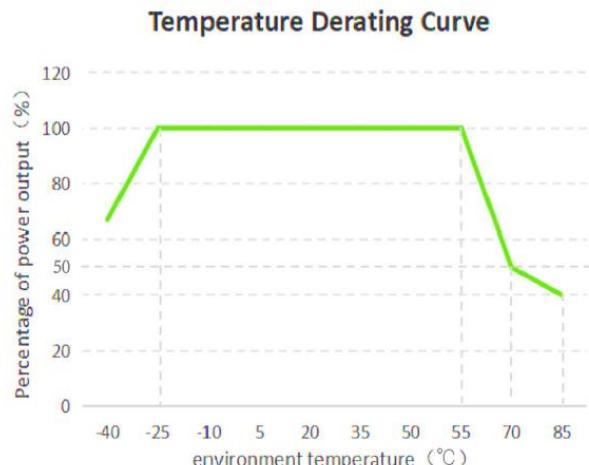Derating Curves


Derating Curves

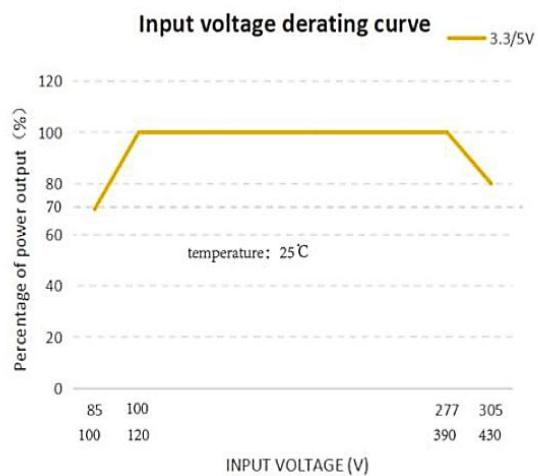

Dimensions and Recommended Layout

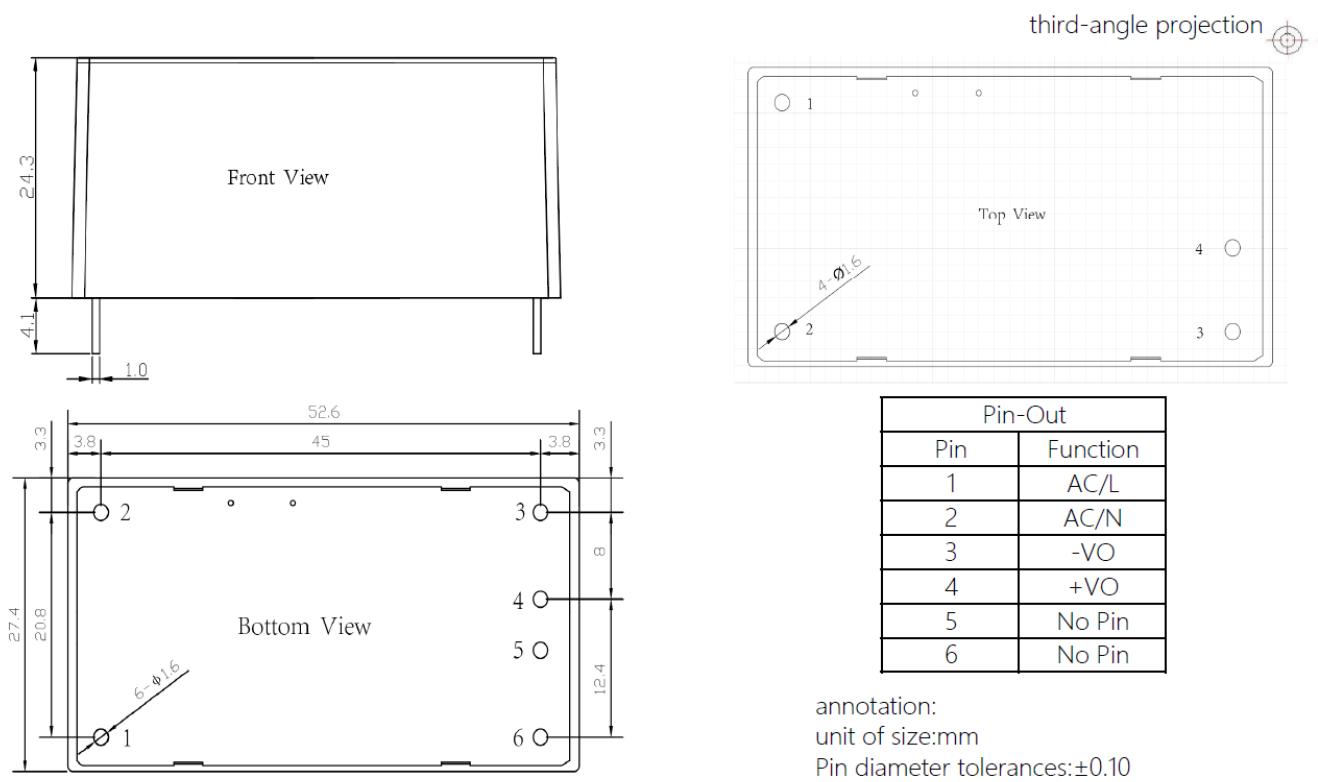

Typical application circuit


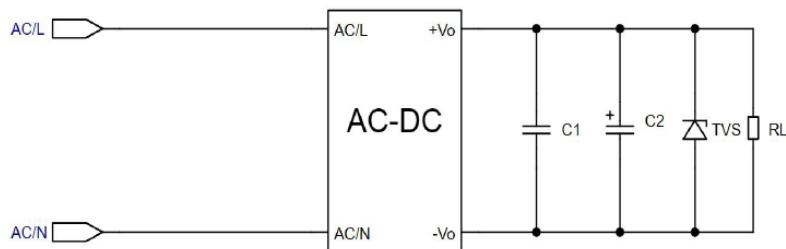


Figure 1:Typical application circuit

MODEL	C1	C2	TVS
56YMC20-3.3□	1uF/50V	10uF/16V	SMBJ7.0A
56YMC20-5□		10uF/16V	SMBJ7.0A
56YMC20-9□		10uF/25V	SMBJ12A
56YMC20-12□		10uF/25V	SMBJ20A
56YMC20-15□		10uF/25V	SMBJ20A
56YMC20-24□		10uF/35V	SMBJ30A

EMC Solution, Recommended Circuit


Figure 2: EMC Recommended circuits for higher requirements

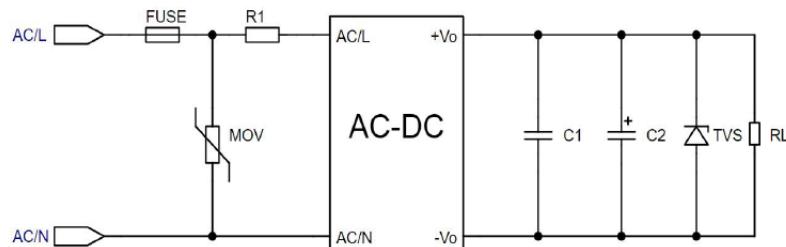

Component Type	Recommended Value
FUSE	3.15A/300V Slow fuse, must be connected
MOV	14D561K
MOV	3Ω/3W(Winding resistor)

Figure 3: I device recommendation circuit

(Recommended when the output end of the product needs to be connected to PE or connected to PE through a Y cap)

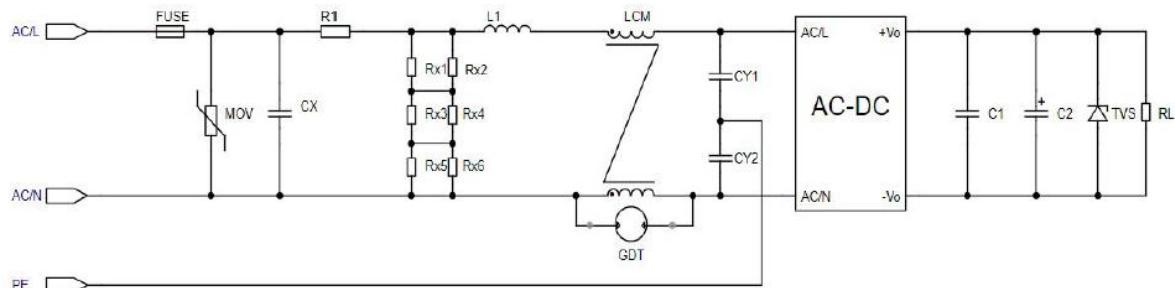

Component Type	Recommended Value
FUSE	2A/300V Slow fuse must be connected
MOV	14D561K
CX	334K/305VAC
R1	12Ω/5W (Winding resistor, must be connected)
L1	1.2mH/0.5A
CY1/CY2	2.2nF/400VAC
GDT	300V/1KA
LCM	20mH