

Features

- Input Voltage Range 85-305VAC
- UL/EN/IEC 62368-1, EN 60335-1 Safety approved
- 88% Efficiency
- OVC II (EN 62368-1 & OVC II (EN 60335-1); 2000m altitude
- Single Output 5-48V DC
- SCP, OLP, OVP



56YMR30-xx□-RS Series

30W Encapsulated AC/DC PCB Mount Power Supply



The 56YMR30-xx-RS Series is a performance-focused 30W Encapsulated AC/DC PCB Mount Power Supply. Designed for use in applications such as network equipment and signal distribution hardware. This series is supplied with a Pin or Screw Terminal input connection and supports input voltages of 85~305V AC 47-63Hz.

Model Number Information

56YMR	30	xx	□
Series Name	Rated Wattage	Output Voltage	T: Terminal Block Blank: PCB Mounting Style

Models

Model Number	Rated Power (W)	DC Voltage (V)	Rated Current (A)	Efficiency (%)	Max. Capacitive Load (uF)
56YMR30-05□-RS	30	5	6	85	8000
56YMR30-12□-RS	30	12	2.5	87	5000
56YMR30-15□-RS	30	15	2	87	2000
56YMR30-24□-RS	30	24	1.25	87	1000
56YMR30-48□-RS	30	48	0.63	88	800

Input Specifications

Input Voltage	85-305VAC		
Frequency Range	47-63Hz		
AC Current	1.0A/115VAC	0.5A/230VAC	
Inrush Current	Cold Start 45A/400us at 230VAC 50Hz		Cold Start 25A/600us at 115VAC 50Hz
Leakage Current	<0.25mA/264VAC		

Output Specifications

Voltage Tolerance	+2.0%		
Line Regulation	+0.5%		
Load Regulation	±1.0%		
Setup,Rise,Hold up Time	1.5s,30ms,40ms/230VAC(at full load)		1.9s,30ms,10ms/115VAC(at full load)

Protection

Over Load	115~160%				
	Hiccup mode, recovers automatically after fault condition is removed				
Short Circuit	Hiccup mode, recovers automatically after fault condition is removed.				
Over Voltage	5.25 ~ 7.5V	12.8 ~ 16V	17 ~ 24V	27 ~ 34V	50.4 ~ 63V
	Recover automatically after fault condition is removed.				

Environmental Characteristics

Working Temp	-30 ~ +85°C(Full load can be operated at -30°C to 50°C, while load should be reduced at 50°C to 85°C Refer to "Derating Curve".)				
Working Humidity	20 ~ 90%RH Non-condensing				
Storage Temp., Humidity	-40 ~ +85°C, 10 ~ 95%RH Non-condensing				
Temp. Coefficient	± 0.03%/(0 ~ 40°C)				
Soldering Temperature	Wave soldering:265°C,5s(max.); Manual soldering:390°C,3s(max)				
Vibration	PCB Mounting: 10 ~ 500Hz, 2G 10min./1cycle, period for 60min. each along X, Y, Z axes Terminal Blocks: 10 ~ 500Hz, 5G 10min./1cycle, period for 60min. each along X, Y, Z axes				
MTBF	654.7Khrs min. MIL-HDBK-217F(25°C)				
Over Voltage Category	OVC II in accordance with EN 62368-1 or OVC III in accordance with EN 60335-1; altitude up to 2000m				

Safety & EMC

Safety Standards	EN IEC 62368-1, IEC 62368-1, EN 60335-1, UL 62368-1	
Withstand Voltage	I/P-O/P: 3KVAC/1min	
Isolation Resistance	I/P-O/P:100M Ohms / 500VDC / 25°C / 70% RH	
EMC Emission	Parameter	Standard
	Conducted	BS EN/EN55032(CISPR32)
	Radiated	BS EN/EN55032(CISPR32)
	Harmonic Current	EN61000-3-2
EMC Immunity	Voltage flicker	EN61000-3-3
	BS EN/EN55035, BS EN/EN61000-6-2	
	Parameter	Standard
	ESD	EN61000-4-2
	Radiated Susceptibility	EN61000-4-3
	EFT/Burst	EN61000-4-4
	Surge	EN61000-4-5
	Conducted	EN61000-4-6
	Magnetic Field	EN61000-4-8
	Voltage Dips and interruptions	EN61000-4-11

Notes:

1. All parameters without special description are measured under the conditions of input 230VAC, rated load, ambient temperature 25 ° C, and ambient humidity less than 75%.
2. Ripple & noise are measured from peak to peak with a bandwidth limit of 20MHz(0.1uf and 47uf /50V parallel capacitor under DC output full load, AC nominal input 25 °C ambient temperature).
3. Tolerance: includes set up tolerance, line and load regulation.
4. Derating may be needed under low input voltages. Please check the derating curve for more details.
5. The power supply is considered a component which will be installed into the final equipment. The final equipment must be confirmed to meet EMC directives. For guidance on performing these EMC tests, please refer to "EMI testing of component power supplies."
6. The ambient temperature derating of 3.5°C/1000m is needed for operating altitude greater than 2000m(6500ft).

Dimensions & Weight


Measurements	
56YMR30-xx-RS	69.5 x 39 x 24 mm
56YMR30-xxT-RS	91 x 39.5 x 28.5 mm
Weight	94g/pcs;- 56YMR30-xx-RS

Packaging


Carton Size	32.5x17.5x25cm - 56YMR30-xx-RS 41.5x25x17cm - 56YMR30-xxT-RS
-------------	---

Derating Curves

Derating Curve

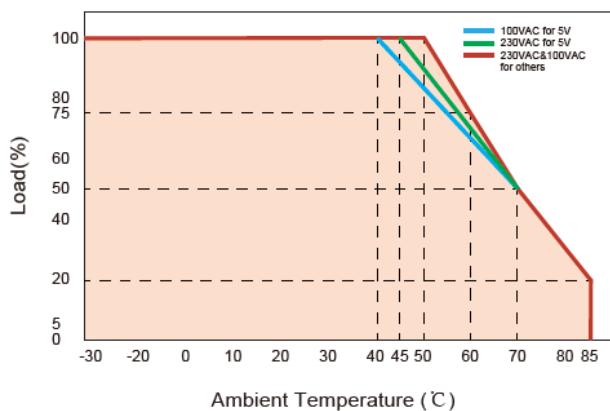


Static Characteristics

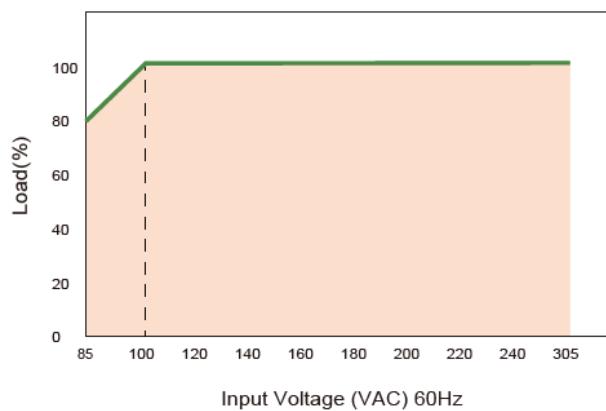

Dimensions and Recommended Layout

(Unit: mm, tolerance: ± 0.5 mm)

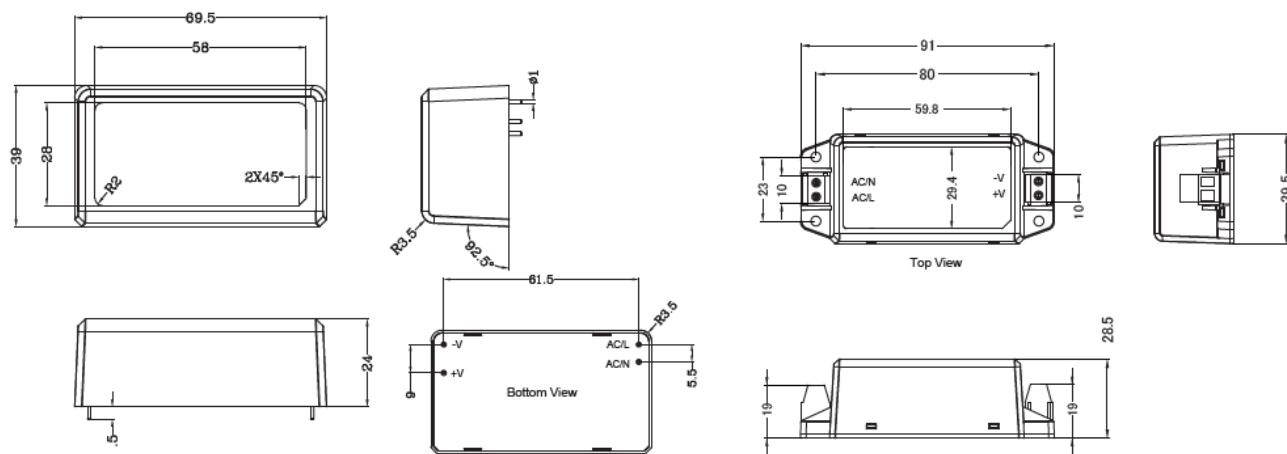

Block Diagram

