

## Features

- Input Voltage: 100~240VAC/140~340VDC
- Built-in active PFC Function, PFC>0.95
- -30~+70°C working temperature
- Approved to CE, CB, CCC, cULus
- Efficiency up to 88%
- Protection: OLP, OVP, OTP SCP
- 3 Years Warranty



Certified to EN 62368-1/IEC 62368-1/GB 4943.1 & CE, RoHS, REACH Standards and complies with the relevant Efficiency Regulations. These are primarily used in ITE, Audio & Video Industries and customised solutions are available upon request.

### Models

Model Number	DC Voltage (V)	Output Power (W)	Input Voltage (V AC)	Efficiency (%)	Output Current (A)	Max Capacitive Load (µF)
64A-100FKB-12P	12	102	100-240	86	0-8.50	3600
64A-100FKB-15P	15	100.5	100-240	88.5	0-6.70	1800
64A-100FKB -24P	24	100.8	100-240	87	0-4.20	900
64A-100FKB -36P	36	100.8	100-240	87	0-2.80	600
64A-100FKB -48P	48	100.8	100-240	88	0-2.10	360

#### Notes:

All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature.

### Input Specifications

Input Voltage	90-264VAC	
Rated Input Voltage (AC)	100-240VAC	
Rated Input Voltage (DC)	140-340VAC	
Input current	1.1A	100% load, 230Vac
	0.55V	100% load, 115Vac
Frequency Range	47~63Hz	
Inrush Current	120A/230/277VAC	
Leakage Current	2.0mA, 240VAC/60Hz	

**Output Specifications**

	12v	15v	24v	36v	48V
Voltage Tolerance	±1.0%				
Voltage adj. Range	10.8-13.2	13.5-16.5	21.6-26.4	32.4-39.6	44-52
Ripple & Noise (pk-pk)	100mV	150mV		200mV	250mV
Default voltage	11.88-12.12	14.85-15.15	23.76-14.24	35.64-36.36	47.52-48.48
Rise Time	50ms/230VAC				
Turn on Delay Time	2500ms/230VAC				
Hold up Time	16ms/230VAC				
Line Regulation	±0.5%	All			
Load Regulation	±2.0%	3.3v, 5v			
	±1.0%	Others			

**Notes:**

Ripple & noise are measured at 20MHz f bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf and 47uf parallel capacitor.

**EMS Standards**

	Notes	Standards/ Criterion		
CE	Electrostatic Discharge (ESD)	EN 61000-4-2	Air 8 kV / contact 4 kV	Criteria B
	Radio-Frequency Electromagnetic Field Susceptibility Test-RS	EN 61000-4-3	80MHz–1GHz 10V/m	Criteria A
	Electrical Fast Transient / Burst-EFT	EN 61000-4-4	±2KV, (5 or 100) kHz	Criteria B
	Surge Immunity Test	EN 61000-4-5	CM±2KV/DM ±1KV	Criteria B
	Conducted Radio Frequency Disturbances Test-CS	EN 61000-4-6	10Vr.m. s;	Criteria A
	Voltage dips		EN61000-4-11	0%/100%/0.5 Period
70%/30%/25 Period				Criteria B
0%/100%/250 Period				Criteria B

**Notes :**

The power supply is considered a component which will be installed into a terminal equipment. All EMC test should be confirmed with the final equipment.

**Safety & EMC**

Harmonic Current	EN 61000-3-2
Conducted Emissions Test & Radiated Emissions Test	EN55032
Voltage Fluctuations & Flicker	EN61000-3-3
Safety Standard	UL 62368-1; EN62368-1; IEC 62368-1; GB 4943.1;

**Protection**

Overload protection	105% -135%
	Constant current limited; recovers automatically after fault condition is removed
Over voltage protection	110~140%
	Shut down output voltage; recovers automatically after fault condition is removed.
Short circuit	Constant current limited; recovers automatically after fault condition is removed.

**Environmental Characteristics**

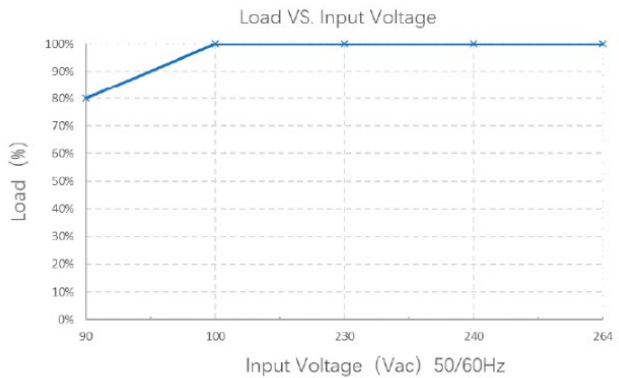
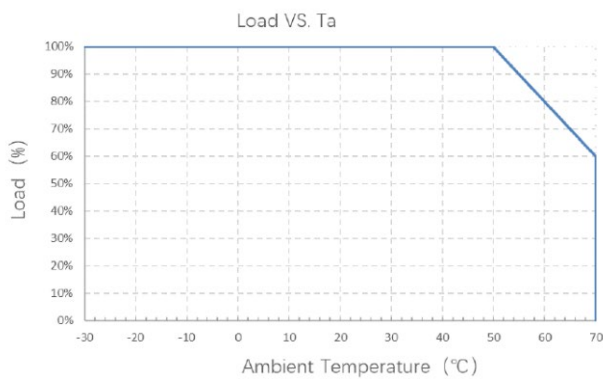
Working Temp & Humidity	-30~70°C 20%~95%RH no condensing (refer to derating curve)		
Storage Temp & Humidity	-40°C~80°C 10%~95%RH no condensing		
Temperature coefficient	±0.03% (0-50°C)		
Altitude	5000m - The ambient temperature of derating of 0.5°C/100m for operating altitude higher than 2000m		
Dielectric test	Input-Output	4000VAC	10mA@60s
	Input- Case	200VAC	10mA@60s
	Output-Case	500VAC	10mA@60s
Ground Resistances	0.1Ω		
Insulation Resistance	100MΩ	500VDC, 60s	

**Other Information**

MTBF	100Khrs, 230VAC,25°C,80% Load (MIL-HDBK-217F)		
SIZE	L179.0×W99.0×H30.0		
Weight	430g		
Output ON/OFF control	RC + / RC -; 0-08v or short circuit or open circuit power on; 4-10v power off (optional)		

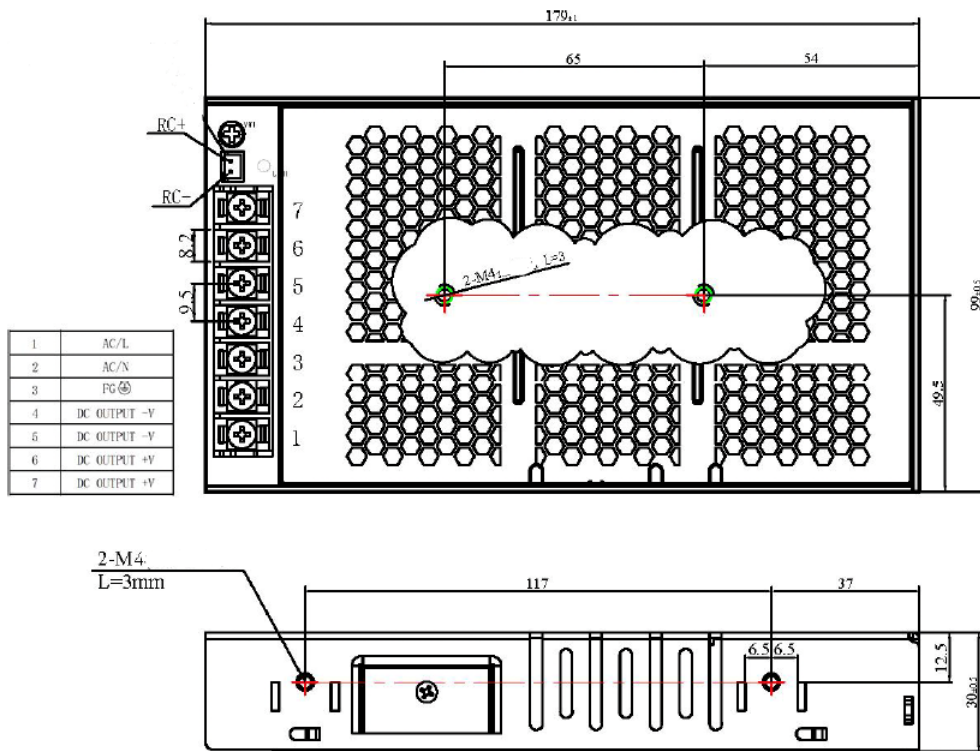
**Notes :**

The power supply is considered a component which will be installed into a terminal equipment. All EMC test should be confirmed with the final equipment.

**Derating Curve**

**Notes:**

To extend the service life, it is recommended to leave 30% more allowance when loading. For example, if the equipment needs 100W power, please choose the power supply over 130W.

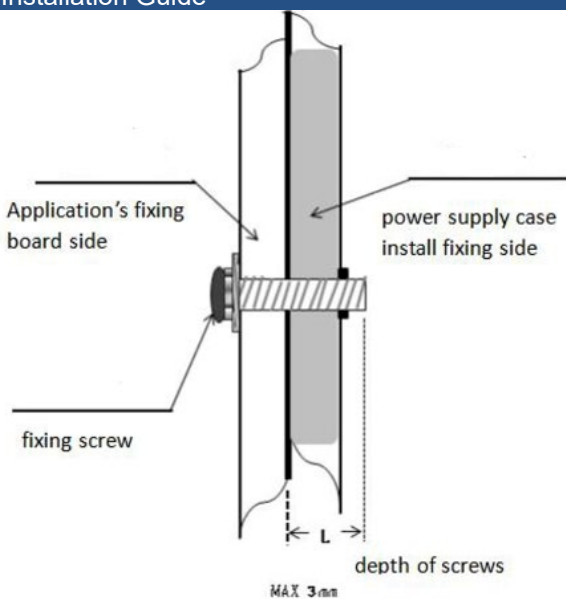
### Dimensions and Recommended Layout



### Other Information

PIN number	PIN Function	PIN Number	PIN Function
L	AC Line	V+	DC Output+
N	AC Neutral	V-	DC Output-
FG	Earth		

### Installation Guide



#### Warning

1. Use mounting screws by M4\*6mm, 0.8N·m
2. Max depth of screws into housing is 3mm
3. Right picture with more details.
4. Connector tightening torque:

Input Terminal : 1.0N·m

Output Terminal: 2.0N·m

## Instructions :

1. Please follow the installation instructions when use the power supply.
2. Before power on test run after installation, please check and proofread the wiring on each terminal, make sure that the input and output, AC and DC, positive and negative, voltage and current values are correct, prevent the occurrence of wrong connection, and avoid damaging the power supply and user equipment.
3. Before power on, please use a multi meter to measure whether the live wire, zero wire and ground wire are short circuited, and whether the output terminal is short circuited; it is better to start without load when power on.
4. Do not exceed the nominal value of the power supply when using, so as not to affect the reliability of the product. If you need to change the output parameters of the power supply, please consult our technical department before using.
5. In order to ensure the safety of use and reduce interference, please ensure that the grounding terminal is reliably grounded (ground wire please thicker than AWG18#)
6. If the power supply fails, please do not repair it without permission. Please contact us on +44 (0) 1733 309865