

## Features

- 120V AC 60Hz Input
- Direct US Fixed Plugtop Adapters
- Approved to cULus, RoHS & REACH
- UL 1310 Safety Approved
- Meets Efficiency Level VI & (EU) 2019/1782
- Output Voltage 3.5 – 24Vac
- Output Current 0.42-2.86A
- Weight 310g



Ideal Power's 77DA-10-xy 10VA AC/AC External Adapter US Plugtop Power Supply (PSU) Series are certified to CULus, RoHS, REACH & UL 1310 Standards and comply with (EU) 2019/1782, Level VI Efficiency Regulations. These are primarily used in ITE, Audio & Video Industries and customised solutions are available upon request.

### Models

Model Number	Output Voltage (V AC)	Output Current (A)	Output Power (VA)
77DA-10-3.5	3.5	2.86	10
77DA-10-06	6	1.67	10
77DA-10-7.5	7.5	1.33	10
77DA-10-09-MI6	9	1.11	10
77DA-10-10	12	0.5	10
77DA-10-12	15	0.83	10
77DA-10-15	18	0.67	10
77DA-10-18	20	0.56	10
77DA-10-22	22	0.45	10
77DA-10-24	24	0.42	10

### Input Data

	Min	Typical	Max	Units
Input Voltage	--	120	--	V AC
Input Frequency	--	60	--	Hz



### General Specifications

	Min	Typical	Max	Units	Notes
Operating Temperature	-10	--	+40	°C	
Storage Temperature	-20	--	+70	°C	
Relative Temperature					40°C +2°C
Relative Humidity					90% RH
Safety Standard					UL 1310

Other Information

Weight	310g
Dimensions	67.0 x 49.0 x 40.0 mm
Output Cable	1.8m Length + 5.5 x 2.1 x 10mm (I) Plug

Mechanical Drawing

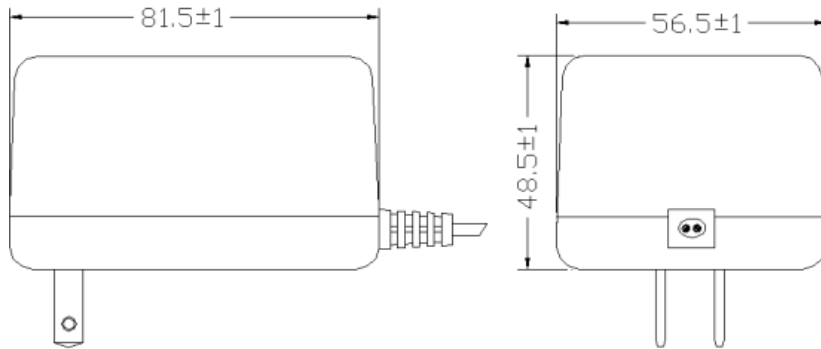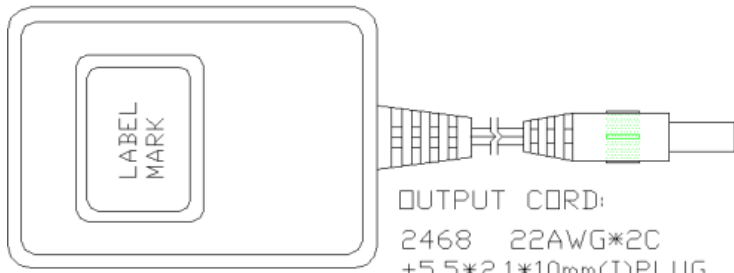

**iP IDEALPOWER**

MODEL NO.: DA-10-09  
INPUT : 120VAC 60Hz 15VA  
OUTPUT: 9VAC 1.11A 10VA

**UL** **us** E149474 **VI**  
**LISTED**

CLASS 2 TRANSFORMER  
TDC POWER PRODUCTS CO., LTD.01

Electrical Circuit

