

Features

- 240V AC 50Hz Input
- Direct Australia Fixed Plugtop Adapters
- Approved to UKCA, CE, RoHS & REACH
AS NZS 61558-2-6/AS NZS 61558-1 Safety Approved
- Meets Efficiency Level VI & (EU) 2019/1782
- Output Voltage 3.5 – 24Vac
- Output Current 0.42 – 2.86A
- Weight 290g



Ideal Power's 77DS-10-xy 10VA AC/AC External Adapter AUS Plugtop Power Supply (PSU) Series are certified to CE, RoHS, REACH & AS NZS 61558-2-6/AS NZS 61558-1 Standards and comply with (EU) 2019/1782, Level VI Efficiency Regulations. These are primarily used in ITE, Audio & Video Industries and customised solutions are available upon request.

Models

Model Number	Output Voltage V AC	Output Current Amp	Output Power VA
77DS-10-3.5	3.5	2.86	10
77DS-10-06	6	1.67	10
77DS-10-7.5	7.5	1.33	10
77DS-10-09	9	1.11	10
77DS-10-12	15	0.83	10
77DS-10-15	18	0.67	10
77DS-10-18	20	0.56	10
77DS-10-22	22	0.45	10
77DS-10-24	24	0.42	10

Input Data

	Min	Typical	Max	Units
Input Voltage	--	240	--	V AC
Input Frequency	--	50	--	Hz

General Specifications

	Min	Typical	Max	Units	Notes
Operating Temperature	-10	--	+40	°C	
Storage Temperature	-20	--	+70	°C	
Relative Temperature					40°C ±2°C
Relative Humidity					90% RH
Safety Standard					AS NZS 61558-2-6/AS NZS 61558-1

Other Information

Weight	290g
Dimensions	81.5 x 56.5 x 48.5 mm
Output Cable	1.8m Length + 5.5 x 2.1 x 12mm DC connector fork and kink style

Mechanical Drawing

OUTPUT CORD:
2468 22AWG/2C 1.8M
+5.5*2.1*12mm FORK&KINK(I)PLUG

81.5±1

56.5±1

48.5±1

SAA PLUG IN

iP IDEALPOWER NSW16803

MODEL NO : DS-10-06 **IP20**


INPUT : 230~240VAC 50Hz 15VA

OUTPUT : 6VAC 1.67A 10VA

130°C 230V

TDC POWER PRODUCTS CO., LTD. 01

Electrical Circuit

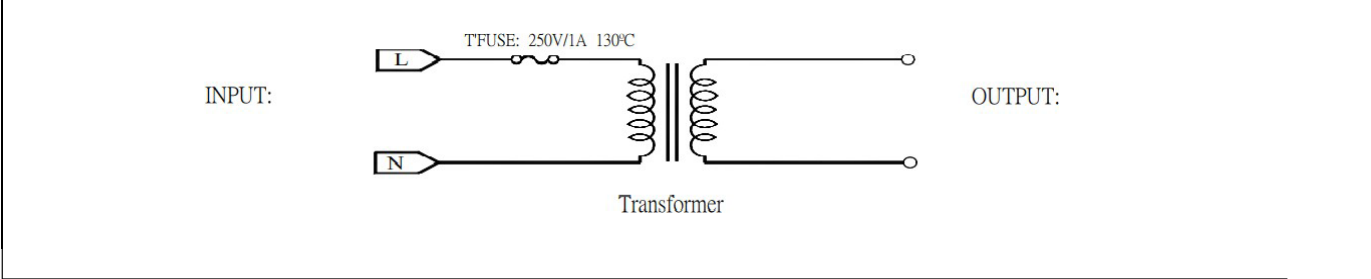

AC-AC