

FEATURES

- CEC IV Efficiency Regulations Compliance
- Cisp'r 22'B', Vcci'B', Fcc'B' Compliance
- Light Weight: 150g only
- Efficiency Over 73%
- Over-Voltage Protective Installation
- Short-circuit Protective Installation
- Protection Type: Auto-Recover
- Special AC Plug Design to Reduce Stock



SPECIFICATION

Item \ Model	SA07-10US05R	SA07-10US08R	SA07-15US12R
Output Voltage	5~7V	8~11V	12~17V
Output Rating	10W Max	10W Max	15W Max
Input Voltage	AC 90~264V		
Input Frequency	47~63Hz		
Input Current	0.5A Maximum		
Inrush Current	40A Maximum		
Line Regulation	2% Maximum		
Load Regulation	±5%		
Ripple & Noise	1% Typical		
Efficiency	73~82% Typical		
Temperature Coefficient	0.05%/°C		
Over-Voltage Protection	Auto Recovery		
Short-circuit Protection	Auto Recovery		
Operating Temperature	0~40°C		
Storage Temperature	-20~85°C		
Safety	UL, CUL, TUV, LPS, CB, BSMI, CEC		
EMC (EMI/EMS)	CE		

(*): Under Development (I/P): In Process (Pending): Pending

Above specification is for reference only, please contact for details.

Ideal Power, Acorn House, Tree Beech Enterprise Park, Gunn, Barnstaple, Devon, England EX32 7NZ

Web. www.idealpower.co.uk

email. sales@idealpower.co.uk

Tel. +44 (0) 845 2603400


Fax. +44 (0) 845 2603401




ORDERING INFORMATION

IDEAL POWER
IDEAL POWER SOLUTIONS

SA07-10US05-A-1A

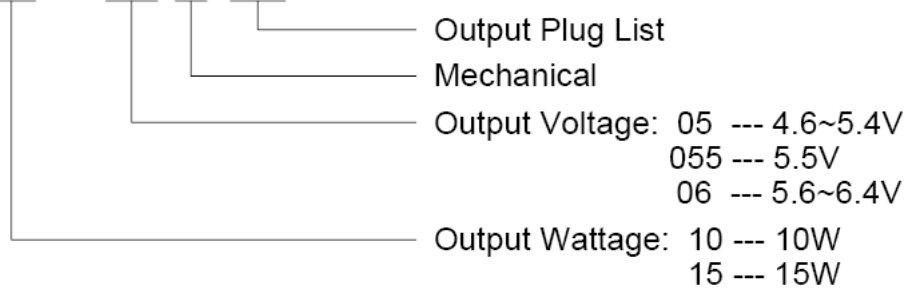

MECHANICAL

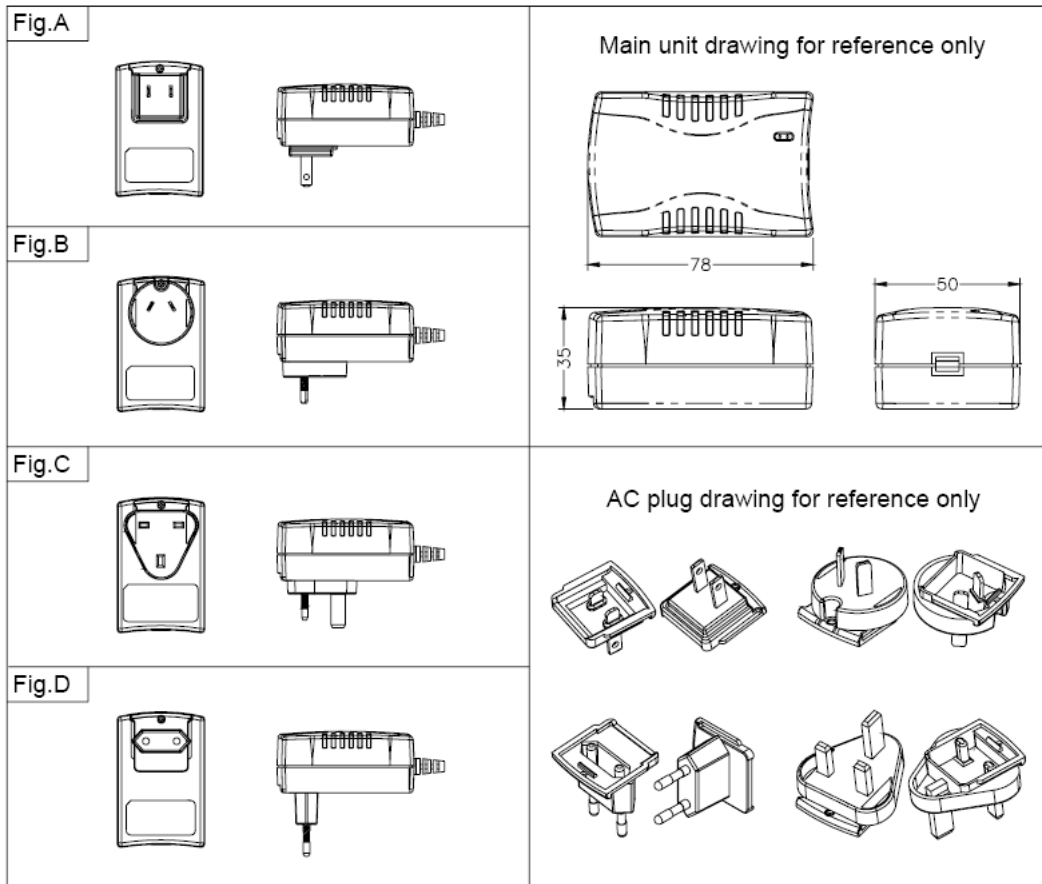

Unit: m.m.

Standard Output Cable:
 5~10V: 18AWG, UL#SPT-1, 1800mm.
 11~17V: 20AWG, UL#2468, 1800mm.