



### Features

- Wide 2:1 input voltage range
- High efficiency up to 88%
- No load power consumption as low as 0.12W
- I/O isolation test voltage 1.5k VDC
- Input UVP, OSC, OCP, OVP
- Operating ambient temperature range: -40°C to +85°C
- Meets CISPR32/EN55032 CLASS A, without extra components
- Input reverse polarity protection
- Industry standard pin-out



Ideal Power's 36VRx-YMD-10WR3-A4S 10W DIN Rail Mount DC/DC Power Supply Converter Series are certified to UKCA, CE, RoHS & EN 62368-1/IEC 62368-1/UL 62368-8 Standards and comply with Efficiency Regulations. These are primarily used in ITE, Audio & Video Industries and customised solutions are available upon request.

### Models

Part No.	Input Voltage (VDC)		Output		Full Load Efficiency <sup>②</sup> (%) Min./Typ.	Capacitive Load <sup>③</sup> (µF)Max.
	Nominal (Range)	Max. ①	Voltage (VDC)	Current(mA) Max./Min.		
36VRA0505YMD-10WR3	5 (4.5-9)	12	±5	±1000/0	76/78	1000
36VRA0512YMD-10WR3			±12	±417/0	81/83	470
36VRA0515YMD-10WR3			±15	±334/0	82/84	330
36VRA0524YMD-10WR3			±24	±209/0	81/83	100
36VRB0503YMD-10WR3			3.3	2500/0	82/84	470
36VRB0505YMD-10WR3			5	2000/0	83/85	470
36VRB0512YMD-10WR3			12	834/0	81/83	470
36VRB0515YMD-10WR3			15	667/0	82/84	330
36VRB0524YMD-10WR3			24	417/0	81/83	100
36VRB1205YMD-10WR3			12 (9-18)	20	5	2000/0
36VRB2405YMD-10WR3	24 (18-36)	40	5	2000/0	80/82	2200
36VRB2412YMD-10WR3			12	833/0	85/87	470
36VRB2415YMD-10WR3			15	667/0	85/87	330
36VRB2424YMD-10WR3			24	416/0	86/88	100
36VRB4803YMD-10WR3	48 (36-75)	80	3.3	2400/0	77/79	2200
36VRB4805YMD-10WR3			5	2000/0	81/83	2200
36VRB4812(X <sup>Ⓞ</sup> )YMD-10WR3			12	833/0	85/87	470
36VRB4815(X)YMD-10WR3			15	667/0	85/87	330
36VRB4824YMD-10WR3			24	416/0	86/88	100

#### Notes:

- ① Use "A2S" suffix for chassis mounting and "A4S" suffix for Din-Rail mounting.
- ② The A2S and A4S Model's start-up and minimum input voltages are increased by 0.5VDC due to the input reverse polarity protection circuit.
- ③ Exceeding the maximum input voltage may cause permanent damage.



- ④ Efficiency is measured at nominal input voltage and rated output load; efficiencies for A2S and A4S Model's is decreased by 2% due to the input reverse polarity protection circuit. The efficiencies of VRB1205YMD-10WR3 A2S and A4S Model's efficiency is decreased by 4%, and that of efficiencies VRA/B05xxYMD-10WR3 A2S and A4S Model's efficiency is decreased by 7%.
- ⑤ The specified maximum capacitive load value for Vo1 and Vo2 output is identical.
- ⑥ "X" means product without Ctrl pin.

### Input Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit	
Input Current (full load / no load)	5VDC nominal input series, nominal input voltage	3.3V output	--	1964/100	2012/150	mA
		5V output	--	2353/100	2410/150	
		Others	--	2500/10	2564/30	
	12VDC nominal input series, nominal input voltage	--	1004/5	1029/12		
		24VDC nominal input series, nominal input voltage	--	502/5	515/12	
			48VDC nominal input series, nominal input voltage	3.3V output	--	
Others	--	251/4		258/8		
Reflected Ripple Current	5VDC / 12VDC nominal input series	--	50	--		
	24VDC nominal input series	--	40	--		
	48VDC nominal input series	--	30	--		
Surge Voltage (1sec. max.)	5VDC nominal input series	-0.7	--	16		
	12VDC nominal input series	-0.7	--	25		
	24VDC nominal input series	-0.7	--	50		
	48VDC nominal input series	-0.7	--	100		
Start-up Voltage	5VDC nominal input series	--	--	4.5	VDC	
	12VDC nominal input series	--	--	9		
	24VDC nominal input series	--	--	18		
	48VDC nominal input series	--	--	36		
Input Under-voltage Protection	5VDC nominal input series	3	3.5	--		
	12VDC nominal input series	5.5	6.5	--		
	24VDC nominal input series	12	15.5	--		
	48VDC nominal input series	26	30	--		
Start-up Time	Nominal input voltage & constant resistance load	--	10	--	ms	
Input Filter	Pi filter					
Hot Plug	Unavailable					
Ctrl*	Module on	Ctrl pin open or pulled high TTL (3.5-12VDC)				
	Module off	Ctrl pin pulled low to GND (0-1.2VDC)				
	Input current when off	--	6	10	mA	

**Note:** \*The Ctrl pin voltage is referenced to input GND, VRB\_XYMD-10WR3 series without Ctrl pin.

DC - DC

**Output Specifications**

Item	Operating Conditions		Min.	Typ.	Max.	Unit	
Voltage Accuracy	0%-100% load	5VDC input, 3.3VDC output	--	±1	±3		
		5VDC input, other output	Positive output	--	±1		±2
			Negative output	--	±1		±3
		Others	--	±1	±3		
Linear Regulation	Input voltage variation from low to high at full load	5VDC input	--	--	±0.5		
		Others	Singe output	--	--		±1
			Dual output	--	±0.2		±0.5
Load Regulation <sup>①</sup>	0%-100% load	5VDC input, 3.3VDC output	--	--	±2	%	
		5VDC input, other output	Singe output	--	--		±1
			Dual output	--	--		±1.5
	5%-100% load	24VDC input	--	±0.5	±1		
		12VDC/48VDC input	--	±0.5	±1		
		VRB0503YMD-10WR3	--	--	±1		
Cross Regulation	Input voltage range, 25%-100% load		--	--	±5		
Transient Recovery Time	25% load step change, nominal input voltage		--	300	500	µs	
Transient Response Deviation	25% load step change, nominal input voltage	±5V output, 36VRB4803YMD-10WR3, 36VRB4805YMD-10WR3, 36VRB0503YMD-10WR3	--	±5	±8	%	
		Others	--	±3	±5		
Temperature Coefficient	Full load		--	--	±0.03	%/°C	
Ripple & Noise <sup>②</sup>	20MHz bandwidth, 5%-100% load		--	40	100	mV p-p	
Over-voltage Protection			110	--	160	%Vo	
Over-current Protection	Input voltage range		110	140	190	%Io	
Short-circuit Protection	Continuous, self-recovery						

**Note:**

- ① Load regulation for 0% -100% for 12VDC/48VDC nominal input series parts to ±5%;  
 ② Under 0% -5% load conditions, ripple & noise does not exceed 5%Vo. The "parallel cable" method is used for Ripple and Noise test, please refer to DC-DC Converter Application Notes for specific information.

**General Specifications**

Item	Operating Conditions	Min.	Typ.	Max.	Unit
Isolation	Input-output Electric Strength Test for 1 minute with a leakage current of 1mA max.	1500	--	--	VDC
Insulation Resistance	Input-output resistance at 500VDC	1000	--	--	MΩ
Isolation Capacitance	Input-output capacitance at 100kHz/0.1V	--	1000	--	pF
Operating Temperature	See Fig. 1	-40	--	+85	°C
Storage Temperature		-55	--	+125	
Storage Humidity	Non-condensing	5		95	%RH
Pin Soldering Resistance Temperature	Soldering spot is 1.5mm away from case for 10 seconds	--	--	+300	°C
Vibration		10-150Hz, 5G, 30 Min. along X, Y and Z			
Switching Frequency *	PWM mode	--	350	--	kHz
MTBF	MIL-HDBK-217F@25°C	1000	--	--	k hours

**Note\*** Switching frequency is measured at full load. The module reduces the switching frequency for light load (below 50%) efficiency improvement.

**Mechanical Specifications**

Case Material	Aluminum alloy		
Dimensions	Horizontal package	25.40 × 25.40 × 11.70 mm	
	A2S chassis mounting	76.00 × 31.50 × 21.20 mm	
	A4S DIN-rail mounting	76.00 × 31.50 × 25.80 mm	
Weight	36VRB0505YMD-10WR3, 36VRB0503YMD-10WR3	Horizontal package/A2S wiring package/A4S rail package	15.0g /38.5g /58.5g (Typ.)
	Others		12.5g /36.0g /56.0g(Typ.)
Cooling Method	Free air convection		

**Electromagnetic Compatibility (EMC)**

Emissions	CE	5VDC nominal input	CISPR32/EN55032	CLASS B (see Fig.5-② for recommended circuit)	
		12VDC nominal input	CISPR32/EN55032	CLASS A (without extra components.) / CLASS B (see Fig.4-② for recommended circuit)	
		24VDC nominal input	CISPR32/EN55032	CLASS A (without extra components.) / CLASS B (see Fig.3-② for recommended circuit)	
		48VDC nominal input	CISPR32/EN55032	CLASS B (see Fig.3-② for recommended circuit)	
	RE	5VDC nominal input	CISPR32/EN55032	CLASS B (see Fig.5-② for recommended circuit)	
		12VDC nominal input	CISPR32/EN55032	CLASS A(without extra components.) / CLASS B(see Fig.4-② for recommended circuit)	
		24VDC nominal input	CISPR32/EN55032	CLASS A(without extra components.) / CLASS B(see Fig.3-② for recommended circuit)	
		48VDC nominal input	CISPR32/EN55032	CLASS B (see Fig.3-② for recommended circuit)	
Immunity	ESD	5VDC nominal input	IEC/EN61000-4-2	Contact ±6kV	perf. Criteria B
		Others	IEC/EN61000-4-2	Contact ±4kV	perf. Criteria B

DC – DC



### Design Reference

#### 1 Typical application

All the DC/DC converters of this series are tested before delivery using the recommended circuit shown in Fig. 2.

Input and/or output ripple can be further reduced by appropriately increasing the input & output capacitor values  $C_{in}$  and  $C_{out}$  and/or by selecting capacitors with a low ESR (equivalent series resistance). Also make sure that the capacitance is not exceeding the specified max. capacitive load value of the product.

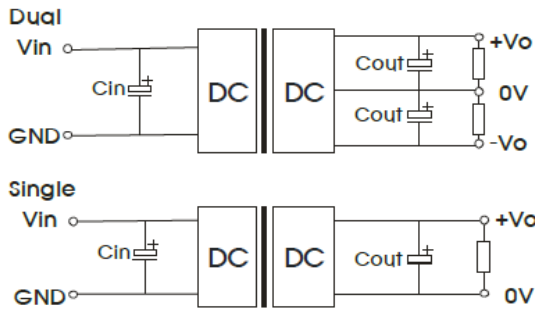


Fig. 2

Vin(VDC)	Cin	Cout
5	100µF/16V	Vo(3.3/5/±5): 10µF/16V Vo(12/±12/15/±15V): 10µF/25V Vo(24/±24V): 10µF/50V
12	100µF/25V	
24	100µF/50V	
48	100µF/100V	

#### 2. EMC compliance circuit

24VDC/48VDC nominal input series

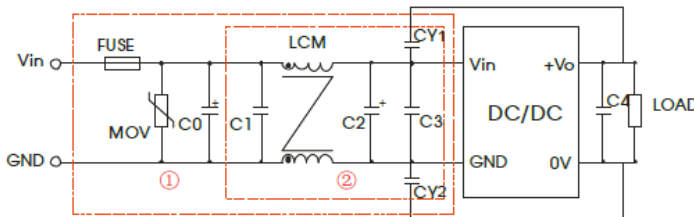


Fig. 3

Notes: For EMC tests we use Part ① in Fig. 3 for immunity and part ② for emissions test. Selecting based on needs.


Parameter description:

Model	Vin: 24VDC	Vin: 48VDC
FUSE	Select fuse value according to actual input current	
MOV	S20K30	S14K60
C0	680µF/50V	680µF/100V
C1	1µF/50V	1µF/100V
C2	330µF/50V	330µF/100V
C3	4.7µF/50V	4.7µF/100V
C4	Refer to the Cout in Fig.2	
LCM	4.7mH, recommended to use MORNSUN FL2D-30-472	
CY1, CY2	1nF/2kV	




### Characteristic Curves

#### 5VDC input series, except 3.3VDC output

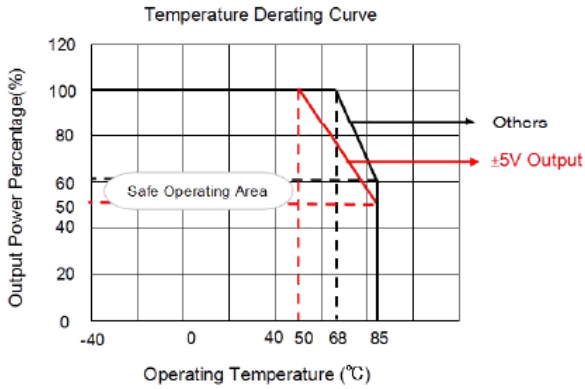

#### Others

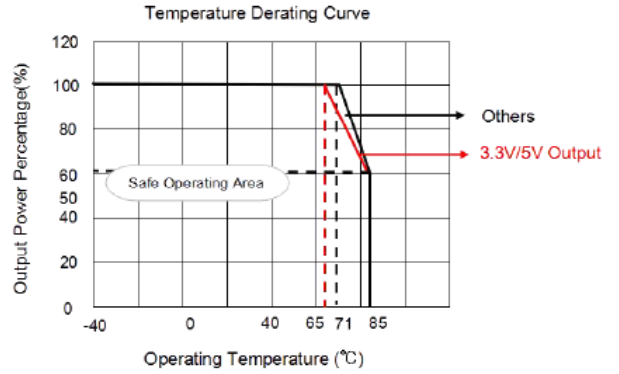

#### 5VDC input series, 3.3VDC output



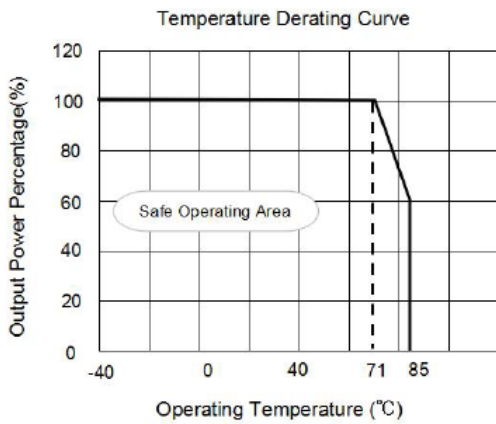


Fig. 1

#### Efficiency Vs Input Voltage (Full Load)


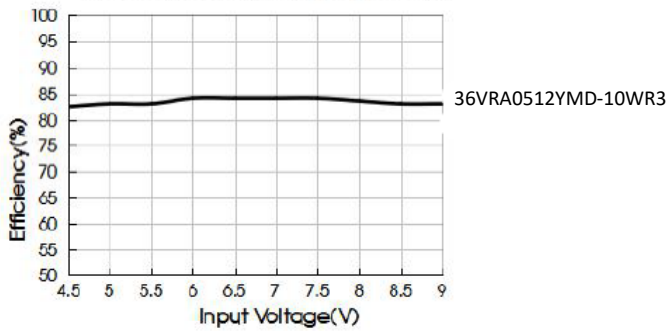


#### Efficiency Vs Output Load (Vin=5V)

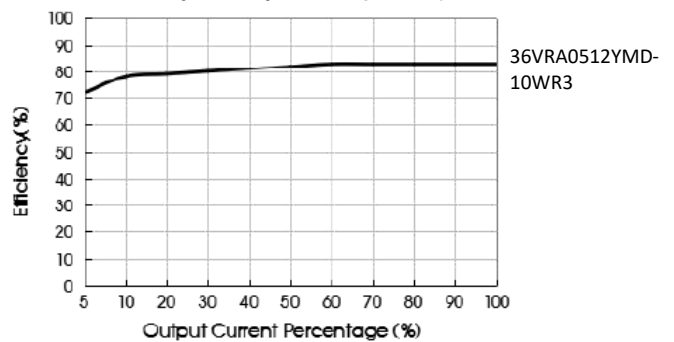





### Characteristic Curves (continued)

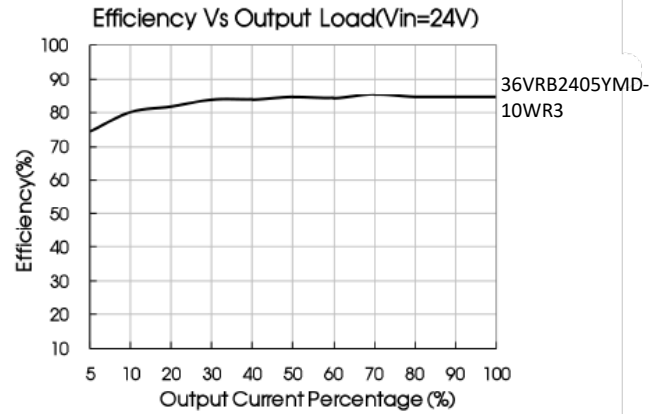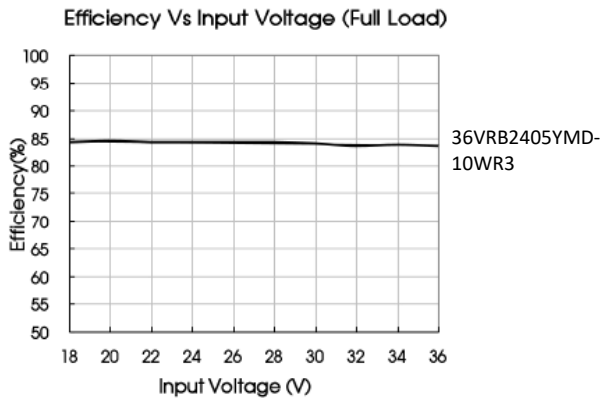


### Dimensions and Recommended Layout

36VRA(B)\_YMD-10WR3

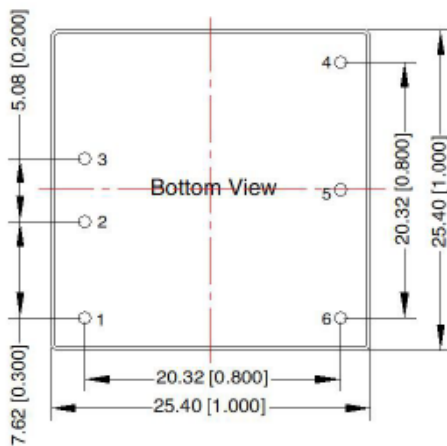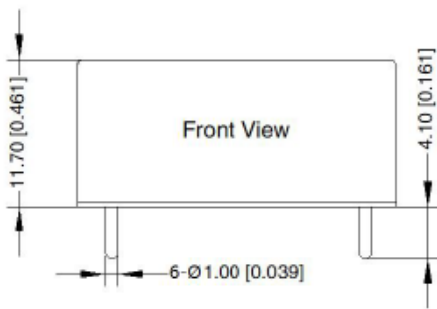

Note:  
 Unit: mm[inch]  
 Pin diameter tolerances:  $\pm 0.10$  [ $\pm 0.004$ ]  
 General tolerances:  $\pm 0.50$  [ $\pm 0.020$ ]  
 PIN1/2/3/4/5/6:  $\phi 1.0$ mm

THIRD ANGLE PROJECTION

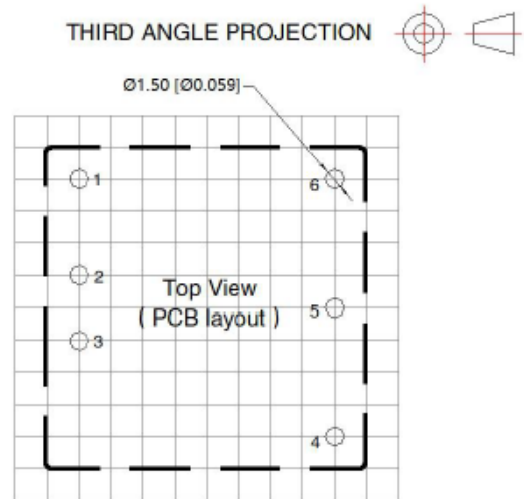

Note: Grid 2.54\*2.54mm



Pin	Pin-Out	
	Single	Dual
1	Ctrl	Ctrl
2	GND	GND
3	Vin	Vin
4	+Vo	+Vo
5	No Pin	0V
6	0V	-Vo




### Dimensions and Recommended Layout

36VRB\_XYMD-10WR3

THIRD ANGLE PROJECTION

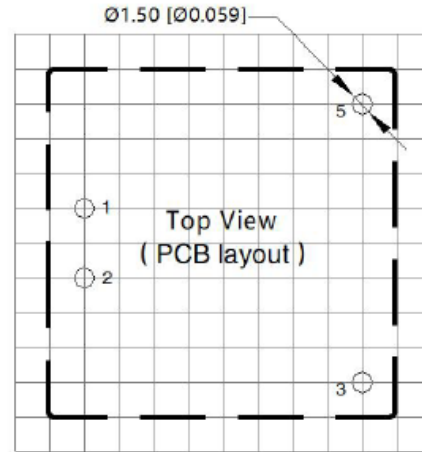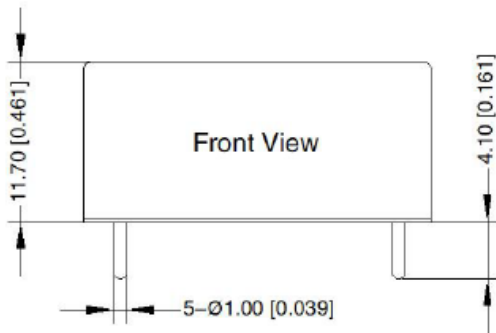

Note: Grid 2.54\*2.54mm

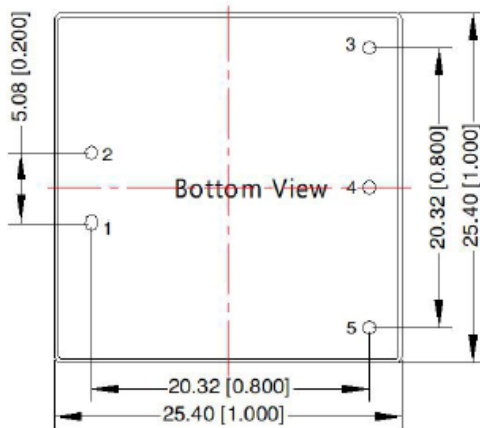

Note:  
 Unit: mm[inch]  
 Pin diameter tolerances:  $\pm 0.10[\pm 0.004]$   
 PIN1/2/3/4/5:  $\phi 1.0\text{mm}$   
 General tolerances:  $\pm 0.50[\pm 0.020]$

Pin-Out	
Pin	Mark
1	GND
2	Vin
3	+Vo
4	No Pin
5	0V


DC - DC





### Dimensions and Recommended Layout

36VRA\_YMD-10WR3A2S & 36VRB\_YMD-10WR3A2S

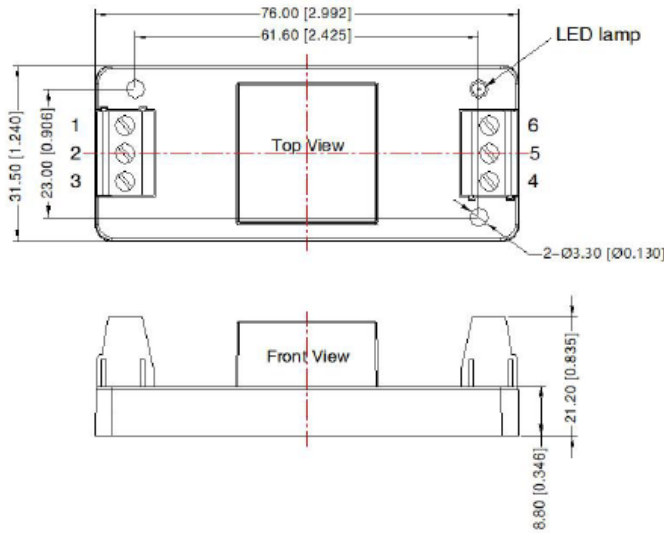


Pin-Out						
Pin	1	2	3	4	5	6
Single	NC	GND	V <sub>in</sub>	+V <sub>o</sub>	NC	0V
Dual	Ctrl	GND	V <sub>in</sub>	+V <sub>o</sub>	0V	-V <sub>o</sub>

Note:  
 Unit: mm[inch]  
 Wire range: 24–12 AWG  
 Tightening torque: Max 0.4 N · m  
 General tolerances: ± 1.00 [± 0.039]

### Dimensions and Recommended Layout

36VRA\_YMD-10WR3A4S & 36VRB\_YMD-10WR3A4S

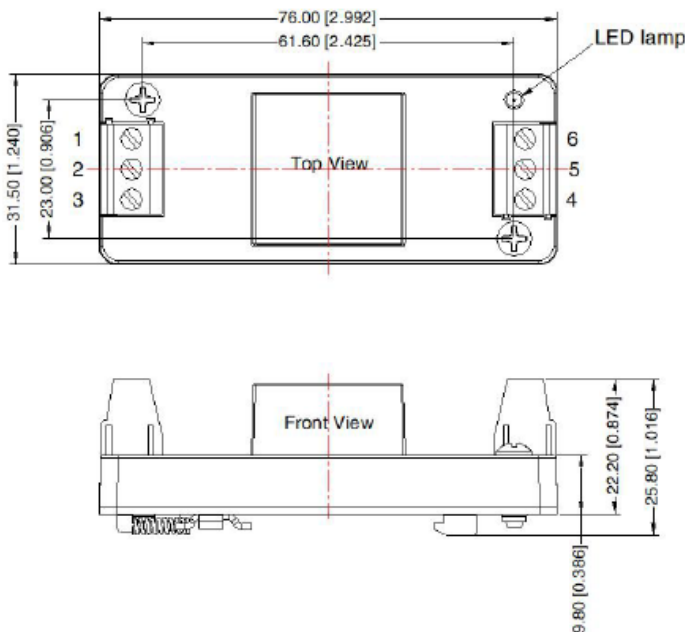

Pin-Out						
Pin	1	2	3	4	5	6
Single	NC	GND	V <sub>in</sub>	+V <sub>o</sub>	NC	0V
Dual	Ctrl	GND	V <sub>in</sub>	+V <sub>o</sub>	0V	-V <sub>o</sub>

Note:  
 Unit: mm[inch]  
 Mounting rail: TS35  
 Wire range: 24–12 AWG  
 Tightening torque: Max 0.4 N · m  
 General tolerances: ± 1.00 [± 0.039]

**Notes:**

For additional information on Product Packaging please refer to [www.IdealPower.co.uk](http://www.IdealPower.co.uk).

If the product is not operated within the required load range, the product performance cannot be guaranteed to comply with all parameters in the datasheet.

The maximum capacitive load offered were tested at input voltage range and full load.

Unless otherwise specified, parameters in this datasheet were measured under the conditions of  $T_a=25^{\circ}\text{C}$ , humidity<75%RH with nominal input voltage and rated output load.

All index testing methods in this datasheet are based on company corporate standards.

We can provide product customization service, please contact our technicians directly for specific information.

Products are related to laws and regulations: see "Features" and "EMC".

Our products shall be classified according to ISO14001 and related environmental laws and regulations, and shall be handled by qualified units.