

Features

- 4:1 Wide Input Range
- Operating Temperature Range: -40~105°C
- Approved to cULus, UKCA, CE
- Approved to IEC/UL/EN62368-1
- Efficiency up to 92%
- EMC Class A
- Single & Dual 40W Output Models
- Available with optional heatsink (HC)
- Six-Sided Shielding



Ideal Power's 43RED40-xyzW 40W Series PCB Mount DIP DC/DC Converters are certified to cURus, UKCA, CE, RoHS, REACH & IEC/UL/EN 62368-1, EN 50155 Standards and comply with Efficiency Regulations. These are primarily used in ITE, Video & Audio, Railway Industries and customised solutions are available upon request.

Models

Model Number	Input Range	Output Voltage	Output Current @Full Load mA	Input Current @No Load mA	Efficiency %	Maximum Capacitor Load µF
43RED40-24S3P3W	9 ~ 36	3.3	12200	15	89.5	22000
43RED40-24S05W	9 ~ 36	5	8000	15	92	12000
43RED40-24S12W	9 ~ 36	12	3333	15	92	2000
43RED40-24S15W	9 ~ 36	15	2666	15	93	1300
43RED40-24S24W	9 ~ 36	24	1666	15	91	490
43RED40-24S48W	9 ~ 36	48	833	15	91	120
43RED40-24S53W	9 ~ 36	53	755	15	91.5	100
43RED40-24D12W	9 ~ 36	±12	±1666	15	91	±980
43RED40-24D15W	9 ~ 36	±15	±1333	15	91	±630
43RED40-24D24W	9 ~ 36	±24	±833	15	91	±250
43RED40-48S3P3W	18 ~ 75	3.3	12200	10	90	22000
43RED40-48S05W	18 ~ 75	5	8000	10	91	12000
43RED40-48S12W	18 ~ 75	12	3333	10	92	2000
43RED40-48S15W	18 ~ 75	15	2666	10	92	1300
43RED40-48S24W	18 ~ 75	24	1666	10	92	490
43RED40-48S48W	18 ~ 75	48	833	10	92	120
43RED40-48S53W	18 ~ 75	53	755	10	92	100
43RED40-48D12W	18 ~ 75	±12	±1666	10	91	±980
43RED40-48D15W	18 ~ 75	±15	±1333	10	91	±630
43RED40-48D24W	18 ~ 75	±24	±833	10	92	±250
43RED40-110S3P3W	36 ~ 160	3.3	12200	10	88	22000
43RED40-110S05W	36 ~ 160	5	8000	10	91	12000
43RED40-110S12W	36 ~ 160	12	3333	10	92	2000
43RED40-110S15W	36 ~ 160	15	2666	10	92	1300
43RED40-110S24W	36 ~ 160	24	1666	10	90.5	490
43RED40-110S48W	36 ~ 160	48	833	10	91	120
43RED40-110S53W	36 ~ 160	53	755	10	91	100
43RED40-110D12W	36 ~ 160	±12	±1666	10	90.5	±980
43RED40-110D15W	36 ~ 160	±15	±1333	10	90.5	±630

Ideal Power Limited

14 Larks Way, Tree Beech Enterprise Park, Gunn, Barnstaple, Devon, England, EX32 7NZ.

www.idealpower.co.uk | +44 (0) 845 260 3400

Input Specifications

Parameter	Conditions		Min	Typ	Max	Unit
Operating input voltage range	24Vin(nom)		9	24	36	VDC
	48Vin(nom) 110Vin(nom)		18	48	75	
			36	110	160	
Start up voltage	24Vin(nom) 48Vin(nom) 110Vin(nom)					VDC
			9			
			18 36			
Shutdown voltage	24Vin(nom) 48Vin(nom) 110Vin(nom)		7	8	8.8	VDC
			15	16	17.5	
			32	34	35.8	
Start up time	Constant resistive load	Power up Remote ON/OFF		30	60	ms
Input surge voltage	1 second, max.	24Vin(nom)				VDC
		48Vin(nom)	50			
		110Vin(nom)	100 200			
Input filter	Pi type					
Remote ON/OFF	Referred to –Vin pin	Positive logic (Standard)	DC-DC ON	Open or 3 ~ 12VDC Short or 0 ~ 1.2VDC		
		Negative logic (Option)	DC-DC OFF	Short or 0 ~ 1.2VDC		
			DC-DC ON	Open or 3 ~ 12VDC		
		DC-DC OFF				
Input current of Ctrl pin Remote off input current			0.5	2	0.5	mA mA

Output Specifications

Parameter	Conditions		Min	Typ	Max	Unit
Voltage accuracy			-1.0		+1.0 %	
Line regulation	Low Line to High Line at Full Load		-0.2		+0.2 %	
Load regulation	No Load to Full Load	Single	-0.5		+0.5 %	
		Dual	-1.0		+1.0	
		Asymmetrical load 25%/100% FL	Dual	-5.0		
Voltage adjustability	Single output	Other	-10		+10 %	
		15Vout, 24Vout	-10		+20	
Ripple and noise	Measured by 20MHz bandwidth With a 1µF/100V X7R MLCC	3.3Vout, 5Vout		75	100	mVp-p
		12Vout, 15Vout		100	125	
		24Vout		150	200	
		48Vout, 53Vout		300	350	
Temperature coefficient			-0.02		+0.02	%/°C
Transient response recovery time	25% load step change			250		µs
Over voltage protection	Zener diode clamp	3.3Vout		3.9		VDC
		5Vout		6.2		
		12Vout		15		
		15Vout		20		
		24Vout		30		
		48Vout		60		
53Vout		63				
Over load protection	% of lout rated; Hiccup mode		150 %			
Short circuit protection	Continuous, automatic recovery					

General Specifications

Parameter	Conditions	Min	Typ	Max	Unit
Isolation voltage	1 minute Input to Output Input (Output) to Case	3000			VDC
		2250			
Isolation resistance	500VDC	1			GΩ
Isolation capacitance				1500	pF
Switching frequency		200	250	275	kHz
Safety approvals	IEC /UL/ EN62368-1			UL:E193009 CB:UL(Demko)	
Standard approvals	EN50155				
	EN45545-2				
Case material					Copper
Base material					FR4 PCB
Potting material					Silicone (UL94 V-0)
Weight					34g (1.2oz)
MTBF	MIL-HDBK-217F, Full load				1.245 x 10 ⁶ hrs

Environmental Specifications

Parameter	Conditions	Min	Typ	Max	Unit
Operating ambient temperature	With derating	-40		+105	°C
Maximum case temperature				105	°C
Over temperature protection			115		°C
Storage temperature range		-55		+125	°C
Thermal impedance	Natural convection Without Heat-sink With Heat-sink	HC1 HC2 HC3,HS	10.8		
			9.3		°C/w
			7.7		
			6.2		
Thermal shock					MIL-STD-810F
Shock					EN61373, MIL-STD-810F
Vibration					EN61373, MIL-STD-810F
Relative humidity					5% to 95% RH

EMC Specifications

Parameter	Conditions	Level
EMI	EN55032, EN50121-3-2 With external components	Class A, Class B
EMS	EN55024, EN50121-3-2	
ESD	EN61000-4-2 Air ± 8kV and Contact ± 6kV	Perf. Criteria A
Radiated immunity	EN61000-4-3 20V/m	Perf. Criteria A
Fast transient	EN61000-4-4 43RED40- 24000W 43RED40-48000W 43RED40-110000W	± 2kV
		With 2 pcs of aluminum electrolytic capacitor (Nippon chemi-con KY series, 220µF/100V) and a TVS (SMDJ58A, 58V, 3000Watt peak pulse power) in parallel.
		With 2 pcs of aluminum electrolytic capacitor (Nippon chemi-con KY series, 220µF/100V) and a TVS (SMDJ120A, 120V, 3000Watt peak pulse power) in parallel.
		With 2 pcs of aluminum electrolytic capacitor (Nippon chemi-con KXJ series, 150µF/200V) and a TVS (SMDJ170A, 170V, 3000Watt peak pulse power) in parallel.

Ideal Power Limited

14 Larks Way, Tree Beech Enterprise Park, Gunn, Barnstaple, Devon, England, EX32 7NZ.





www.idealpower.co.uk | +44 (0) 845 260 3400

EMC Specifications (Continued)

Parameter	Conditions	Level	
Surge	EN61000-4-5	± 2kV	
	43RED40-24000W	With 2 pcs of aluminum electrolytic capacitor (Nippon chemi-con KY series, 220µF/100V) and a TVS (SMDJ58A, 58V, 3000Watt peak pulse power) in parallel.	
	43RED40-48000W	With 2 pcs of aluminum electrolytic capacitor (Nippon chemi-con KY series, 220µF/100V) and a TVS (SMDJ120A, 120V, 3000Watt peak pulse power) in parallel.	
	43RED40-110000W	With 2 pcs of aluminum electrolytic capacitor (Nippon chemi-con KXJ series, 150µF/200V) and a TVS (SMDJ170A, 170V, 3000Watt peak pulse power) in parallel.	
Conducted immunity	EN61000-4-6	10Vr.m.s	Perf. Criteria A
Power frequency magnetic field	EN61000-4-8	100A/m continuous; 1000A/m 1 second	Perf. Criteria A

Safety Approvals
Safety Standards

RoHS/REACH	RoHS Directive (EU) 2015/863 & REACH (205 SVHC)
CE LVD Directive 2014/35/EU	Yes (UK/European)
cULus	Yes
FCC	Yes
TUV	Yes
RCM & C-Tick	Yes

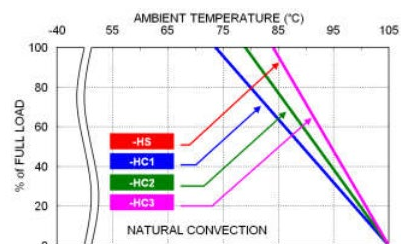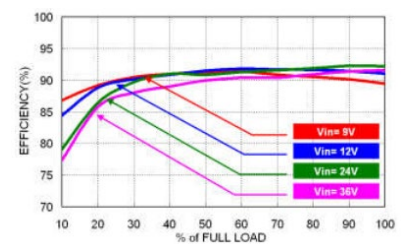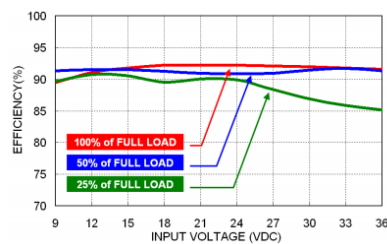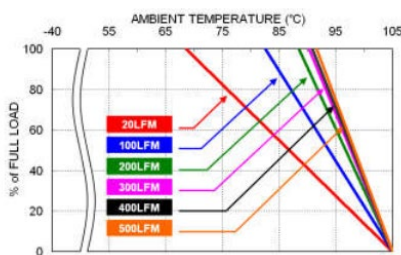Characteristic Curve


Ideal Power Limited

14 Larks Way, Tree Beech Enterprise Park, Gunn, Barnstaple, Devon, England, EX32 7NZ.

www.idealpower.co.uk | +44 (0) 845 260 3400

Fuse Consideration

This power module is not internally fused. An input line fuse must always be used.

This encapsulated power module can be used in a wide variety of applications, ranging from simple stand-alone operation to an integrated part of sophisticated power architecture.


To maximum flexibility, internal fusing is not included; however, to achieve maximum safety and system protection, always use an input line fuse. The input line fuse suggest as below:

Model	Fuse Rating (A)	Fuse Type
43RED40-24□□□W	8	Fast-Acting
43RED40-48□□□W	4	Slow-Blow
43RED40-110□□□W	3.15	Slow-Blow

The table based on the information provided in this data sheet on inrush energy and maximum DC input current at low Vin.

Mechanical Drawing

Standard · -HC1 · -HC2 · -HC3

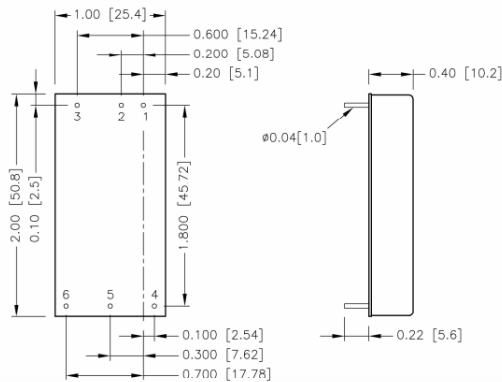


BOTTOM VIEW

PIN CONNECTION

PIN	SINGLE	DUAL
1	+ Vin	+ Vin
2	- Vin	- Vin
3	Ctrl	Ctrl
4	+ Vout	+ Vout
5	- Vout	Com
6	Trim	- Vout

- All dimensions in inch [mm]
Tolerance :x.xxx±0.02 [x.x±0.5]
x.xxx±0.010 [x.xx±0.25]
- Pin dimension tolerance ±0.004[0.10]

-HS

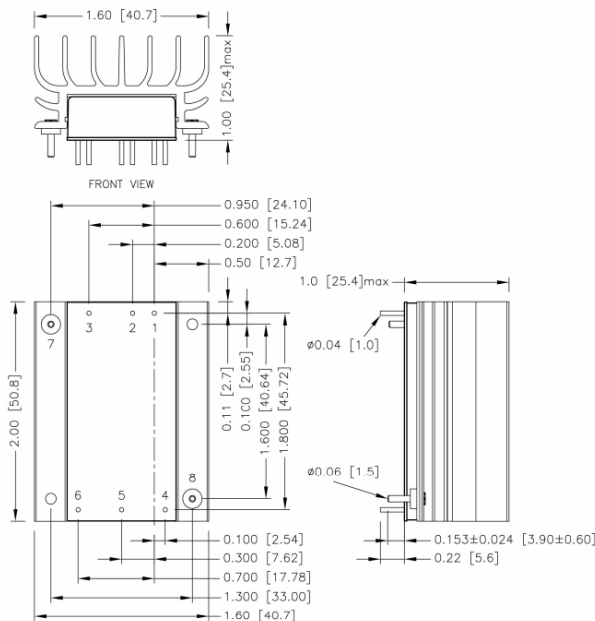

BOTTOM VIEW


PIN CONNECTION

PIN	SINGLE	DUAL
1	+ Vin	+ Vin
2	- Vin	- Vin
3	Ctrl	Ctrl
4	+ Vout	+ Vout
5	- Vout	Com
6	Trim	- Vout
7	Heat-sink	Heat-sink
8	Heat-sink	Heat-sink

- All dimensions in inch [mm]
Tolerance :x.xx±0.02 [x.x±0.5]
x.xxx±0.010 [x.xx±0.25]
- Pin dimension tolerance ±0.004[0.10]


Recommended Pad Layout

Standard

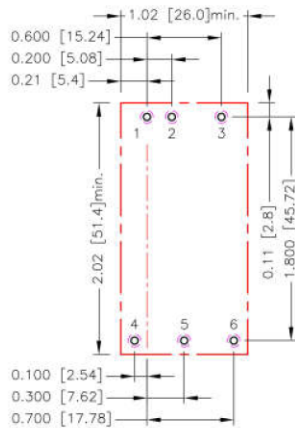


All dimensions in inch[mm]
 Pad size(lead free recommended)
 Through hole 1.2.3.4.5.6: $\Phi 0.051[1.30]$
 Top view pad 1.2.3.4.5.6: $\Phi 0.064[1.63]$
 Bottom view pad 1.2.3.4.5.6: $\Phi 0.102[2.60]$

-HS

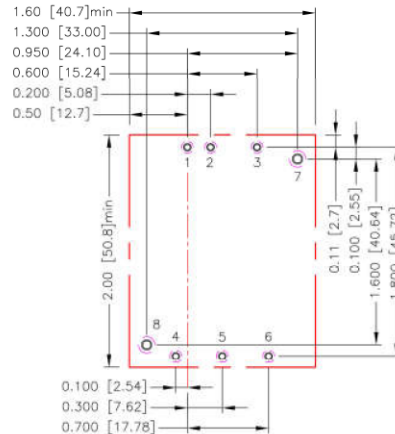

All dimensions in inch[mm]
 Pad size(lead free recommended)
 Through hole 1.2.3.4.5.6: $\Phi 0.051[1.30]$
 Through hole 7.8: $\Phi 0.071[1.80]$
 Top view pad 1.2.3.4.5.6: $\Phi 0.064[1.63]$
 Top view pad 7.8: $\Phi 0.089[2.25]$
 Bottom view pad 1.2.3.4.5.6: $\Phi 0.102[2.60]$
 Bottom view pad 7.8: $\Phi 0.142[3.60]$

-HC1 \ -HC2 \ -HC3

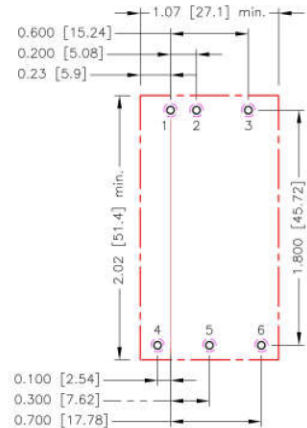

All dimensions in inch[mm]
 Pad size(lead free recommended)
 Through hole 1.2.3.4.5.6: $\Phi 0.051[1.30]$
 Top view pad 1.2.3.4.5.6: $\Phi 0.064[1.63]$
 Bottom view pad 1.2.3.4.5.6: $\Phi 0.102[2.60]$

Thermal Considerations


The power module operates in a variety of thermal environments.

However, sufficient cooling should be provided to help ensure reliable operation of the unit. Heat is removed by conduction, convection, and radiation to the surrounding Environment. Proper cooling can be verified by measuring the point as the figure below.

The temperature at this location should not exceed "Maximum case temperature".

When Operating, adequate cooling must be provided to maintain the test point temperature at or below "Maximum case temperature". You can limit this Temperature to a lower value for extremely high reliability.


- Thermal test condition with vertical direction by natural convection (20LFM).

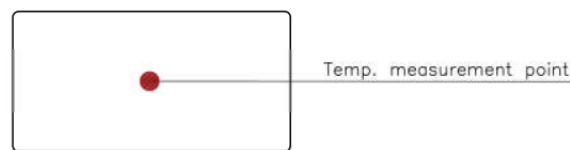

TOP VIEW


Heat-Sink Type Options

43RED40-□□□□W-HS
7G-0110A-F

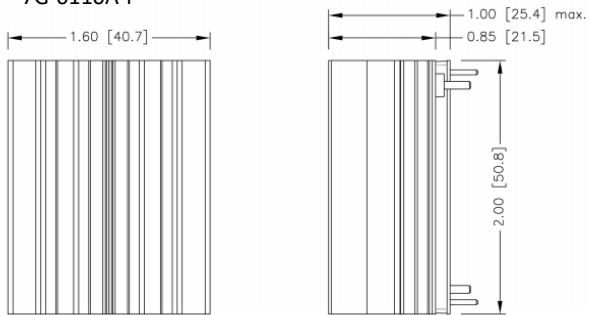


SIDE VIEW

43RED40-□□□□W-HC1
7GA0120P01-F

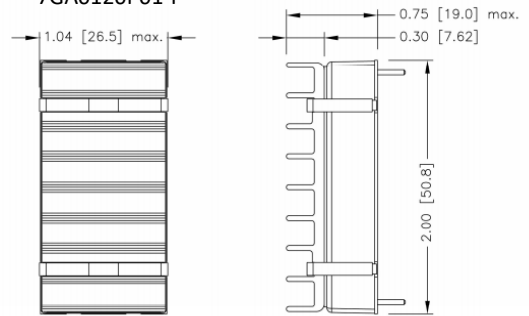


SIDE VIEW

43RED40-□□□□W-HC2
7GA0121P01-F

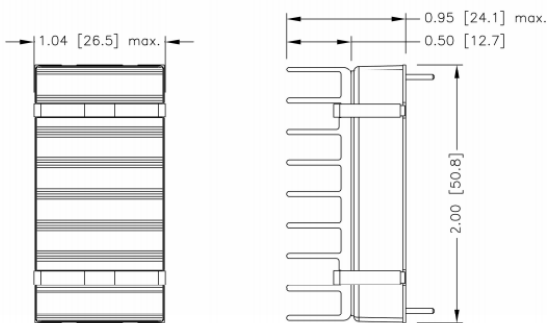

SIDE VIEW

43RED40-□□□□W-HC3
7GA0122P01-F

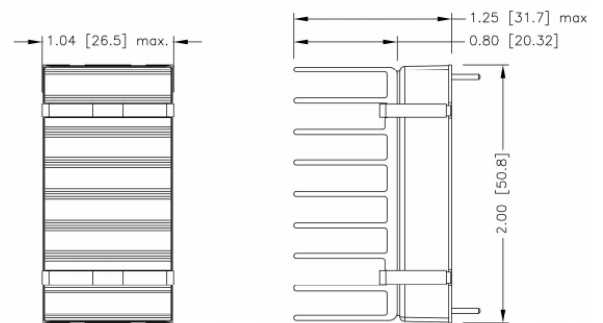

SIDE VIEW

1. All dimensions in inch [mm] 2.
Tolerance :x.xx±0.02 [x.x±0.5] x.xxx±0.010
[x.xx±0.25]

Output Voltage Adjustment

It allows the user to increase or decrease the output voltage of the module.


This is accomplished by connecting an external resistor between the Trim pin and either the +Vout or -Vout pins. With an external resistor between the Trim and -Vout pin, the output voltage increases.

With an external resistor between the Trim and +Vout pin, the output voltage decreases. The external Trim resistor needs to be at least 1/8W of rated power.


EXTERNAL OUTPUT TRIMMING

Output can be externally trimmed by using the method shown below.

Trim-up



□□S3P3W										
ΔV (%)	1	2	3	4	5	6	7	8	9	10
Vout (V)	3.333	3.366	3.399	3.432	3.465	3.498	3.531	3.564	3.597	3.630
RU (kΩ)	43.179	21.758	13.410	8.966	6.206	4.325	2.961	1.927	1.115	0.462
□□S05W										
ΔV (%)	1	2	3	4	5	6	7	8	9	10
Vout (V)	5.05	5.10	5.15	5.20	5.25	5.30	5.35	5.40	5.45	5.50
RU (kΩ)	35.360	16.244	9.752	6.483	4.514	3.198	2.257	1.550	1.000	0.559
□□S12W										
ΔV (%)	1	2	3	4	5	6	7	8	9	10
Vout (V)	12.12	12.24	12.36	12.48	12.60	12.72	12.84	12.96	13.08	13.20
RU (kΩ)	392.864	172.175	101.446	66.591	45.837	32.068	22.264	14.929	9.234	4.685
□□S15W										
ΔV (%)	1	2	3	4	5	6	7	8	9	10
Vout (V)	15.15	15.30	15.45	15.60	15.75	15.90	16.05	16.20	16.35	16.50
RU (kΩ)	413.163	198.115	125.754	89.445	67.618	53.050	42.636	34.820	28.739	23.872
ΔV (%)	11	12	13	14	15	16	17	18	19	20
Vout (V)	16.65	16.80	16.95	17.10	17.25	17.40	17.55	17.70	17.85	18.00
RU (kΩ)	19.888	16.568	13.759	11.350	9.262	7.434	5.822	4.389	3.106	1.951
□□S24W										
ΔV (%)	1	2	3	4	5	6	7	8	9	10
Vout (V)	24.24	24.48	24.72	24.96	25.20	25.44	25.68	25.92	26.16	26.40
RU (kΩ)	947.146	472.772	303.499	216.605	163.724	128.153	102.589	83.329	68.298	56.240
ΔV (%)	11	12	13	14	15	16	17	18	19	20
Vout (V)	26.64	26.88	27.12	27.36	27.60	27.84	28.08	28.32	28.56	28.80
RU (kΩ)	46.353	38.099	31.104	25.101	19.892	15.330	11.302	7.718	4.509	1.619
□□S48W										
ΔV (%)	1	2	3	4	5	6	7	8	9	10
Vout (V)	48.48	48.96	49.44	49.92	50.40	50.88	51.36	51.84	52.32	52.80
RU (kΩ)	531.639	226.403	131.987	86.042	58.867	40.910	28.162	18.642	11.263	5.376
□□S53W										
ΔV (%)	1	2	3	4	5	6	7	8	9	10
Vout (V)	53.53	54.06	54.59	55.12	55.65	56.18	56.71	57.24	57.77	58.30
RU (kΩ)	626.943	246.365	140.489	90.768	61.891	43.022	29.726	19.853	12.231	6.169

Trim-down


□□S3P3W										
ΔV (%)	1	2	3	4	5	6	7	8	9	10
Vout (V)	3.267	3.234	3.201	3.168	3.135	3.102	3.069	3.036	3.003	2.970
RD (kΩ)	68.728	31.256	18.592	12.227	8.398	5.841	4.012	2.639	1.570	0.715
□□S05W										
ΔV (%)	1	2	3	4	5	6	7	8	9	10
Vout (V)	4.95	4.90	4.85	4.80	4.75	4.70	4.65	4.60	4.55	4.50
RD (kΩ)	46.686	20.817	12.360	8.162	5.653	3.984	2.794	1.903	1.210	0.656
□□S12W										
ΔV (%)	1	2	3	4	5	6	7	8	9	10
Vout (V)	11.88	11.76	11.64	11.52	11.40	11.28	11.16	11.04	10.92	10.80
RD (kΩ)	435.294	201.116	120.429	79.573	54.894	38.371	26.535	17.639	10.709	5.157
□□S15W										
ΔV (%)	1	2	3	4	5	6	7	8	9	10
Vout (V)	14.85	14.70	14.55	14.40	14.25	14.10	13.95	13.80	13.65	13.50
RD (kΩ)	302.154	132.978	78.547	51.685	35.680	25.055	17.489	11.826	7.429	3.916
□□S24W										
ΔV (%)	1	2	3	4	5	6	7	8	9	10
Vout (V)	23.76	23.52	23.28	23.04	22.80	22.56	22.32	22.08	21.84	21.60
RD (kΩ)	736.063	326.672	192.473	125.790	85.913	59.383	40.459	26.282	15.263	6.454
□□S48W										
ΔV (%)	1	2	3	4	5	6	7	8	9	10
Vout (V)	47.52	47.04	46.56	46.08	45.60	45.12	44.64	44.16	43.68	43.20
RD (kΩ)	558.604	257.390	153.744	101.292	69.616	48.413	33.225	21.811	12.920	5.798
□□S53W										
ΔV (%)	1	2	3	4	5	6	7	8	9	10
Vout (V)	52.47	51.94	51.41	50.88	50.35	49.82	49.29	48.76	48.23	47.70
RD (kΩ)	551.986	256.323	153.564	101.358	69.765	48.589	33.408	21.991	13.093	5.962