

Features

Universal Input 90~264VDAC
 Direct EU Fixed Plugtop Adapters
 Approved to CE, TUV-GS, CB,
 RoHS
 EN61558 Safety Approved
 EMC Class B Certified
 Single Output 12V DC
 OVP, OLP, SCP



56YS12C-E-xy-RS Series

12W External AC/DC UK Plugtop Adapter Power Supply



The 56YS12C-E-xy-RS Series is a high-efficiency and standards-compliant 12W External AC/DC UK Plugtop Adapter Power Supply. Designed for use in applications such as industrial control and automation systems. This series is supplied with a EU Fixed input connection and supports input voltages of 90~64V AC 50~60Hz.

Model Number Information

56YS_C	E	12	xy
Series Name	EU Plug	Rated Wattage	Output Voltage

Models

Model Number	DC Voltage (V)	Rated Current (A)	Rated Power (W)	Efficiency (%)	Ripple & Noise(max) (mVp-p)
56YS12C-1500500-RS	15	0.5	12	79	150

Input Specifications	
Rated Voltage Range	100-240VAC
Voltage Range	90-264VAC
Frequency Range	50/60Hz
AC Current	0.4A/115VAC 0.2A/230VAC
Efficiency	79%
Inrush Current	Cold Start 50A/200us at 230VAC 50Hz Cold Start 25A/200us at 115VAC 50Hz
Leakage Current	<0.25mA/230VAC
No Load Power	<0.1W

Output Specifications	
DC Voltage	15V
Rated Current	0.5A
Rated Power	12w
Ripple & Noise(max.)	150mVp-p
Voltage Tolerance	+5%
Line Regulation	+3%
Load Regulation	+5%
Setup,Rise,Hold up Time	1.0s,30ms,25ms/230VAC(at full load) 2.0s,30ms,12ms/115VAC(at full load)

Protection	
Over Load	105~150% Hiccup mode, recovers automatically after fault condition is removed.
Short Circuit	Shut down o/p voltage, re-power on to recover.
Over Voltage	120~180% Shut down o/p voltage, re-power on to recover.

Environmental Characteristics	
Working Temp	-20 ~ +60°C(Please refer to "Derating Curve"section)
Working Humidity	20 ~ 95%RH Non-condensing
Storage Temp., Humidity	-40 ~ +85°C, 10 ~ 95%RH Non-condensing
Temp. Coefficient	0.03%/(0 ~ 40°C)
MTBF	224.6Khrs min. MIL-HDBK-217F(25°C)

Safety & EMC			
Safety Standards	BS EN IEC 62368-1		
Withstand Voltage	I/P-O/P: 3KVAC/1min		
Isolation Resistance	I/P-O/P:100M Ohms / 500VDC / 25°C/ 70% RH		
EMC Emission	Parameter	Standard	Test Level
	Conducted	EN55014	CLASS B
	Radiated	EN55014	CLASS B
	Harmonic Current	EN61000-3-2	CLASS B
	Voltage flicker	EN61000-3-3	CLASS B
EMC Immunity	Parameter	Standard	Test Level
	ESD	EN61000-4-2	Level 3, 8KV air, criteria A
	Radiated Susceptibility	EN61000-4-3	Level 3, criteria A
	EFT/Burest	EN61000-4-4	Level 3, criteria A
	Surge	EN61000-4-5	Level 4, 2KV/L-N, criteria A
	Conducted	EN61000-4-6	Level 3, criteria A
	Magnetic Field	EN61000-4-8	Level 4, criteria A
	Voltage Dips and interruptions	EN61000-4-11	> 95% dip 0.5 periods, 30% dip 25 periods, >95% interruptions 250 periods>

Notes:


1. All parameters without special description are measured under the conditions of input 230VAC, rated load, ambient temperature 25 ° C, and ambient humidity less than 75%.
2. Ripple & noise are measured from peak to peak with a bandwidth limit of 20MHz(0.1uf and 47uf /50V parallel capacitor under DC output full load, AC nominal input 25 °C ambient temperature).
3. Tolerance: includes set up tolerance, line and load regulation.
4. Derating may be needed under low input voltages. Please check the derating curve for more details.
5. The power supply is considered a component which will be installed into the final equipment. The final equipment must be confirmed to meet EMC directives. For guidance on performing these EMC tests, please refer to "EMI testing of component power supplies."
6. The ambient temperature derating of 3.5°C/1000m is needed for operating altitude greater than 2000m(6500ft).

Dimensions & Weight		
	Measurements	Weight
56YS12C-1500500	62.8 x 42 x 27.9 mm	110g/pcs


Packaging	
Carton Size	40 x 37.5 x 21.5 cm
Master Carton Quantities	100pcs/carton

Derating Curves

1. Derating Curve

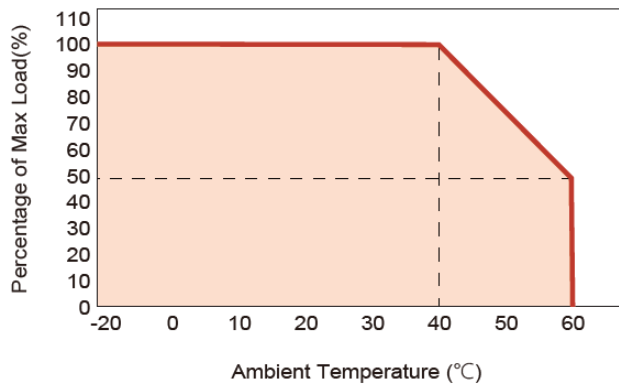

2. Static Characteristics

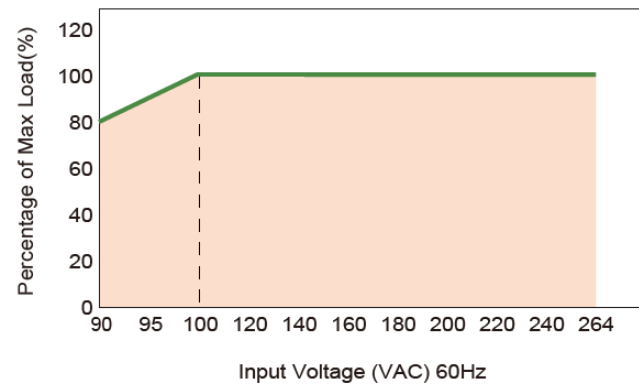

DC Output Plug (Option)

Standard Model : D1J

D1J	Pin Assignment
